

STAUFF Filtration Technology offers a complete range of filtration products and services. This will provide the system designer or user with the highest level of contamination control demanded by today's most sophisticated applications.

STAUFF Filtration Technology Products include Pressure Filters, Return Line Filters, Replacement Filter Elements and Spin-On Filters for various hydraulic and lubrication oils.

STAUFF manufactures more than 10000 different elements and has the technical expertise to provide superior filter element designs for the STAUFF original filter housings and also for the interchange element market, while maintaining or surpassing the original performance.

A well-stocked warehouse guarantees the possibility of short-term arrangements without their own storage. Therefore, we can react flexible for your specific needs.

Please do not hesitate to contact STAUFF for further details.

www.stauff.com

C Filtration Technology

Index	C2
Filtration Guideline	C6
Pressure Filters	C18
Return Line Filters	C51
Spin-On Filters	C122
Offline- and Bypass Filters	C149
Mobile Filter Systems	C178
Replacement Filter Elements	C180

Filtration Guideline

Introduction
 Filtration - Why?
 Contamination
 STAUFF Filter Components
 Test Standards and Oil Purity
 Short & Curt: Filter Rating
 β-Value and Separations Efficiency
 Filtration Terminology
 Choice of Filters / Examples of Calculation
 Filter Selection Software
 STAUFF Contamination Control Programm (SCCP)

Filter Elements

STAUFF Replacement Filter Elements


Pressure Filters

C6	Overview High Pressure Filters		C18
C7	Types SF / SF-TM / SF-SM / SFA / SFZ		
C7			
C9			
C10	High Pressure Filters (Inline)	SF	
C11	Max. 420 bar / 6000 PSI		
C11	Max. 1135 l/min / 300 US GPM		
C11	Technical Data / Dimensions		C19
C12	Order Code - High Pressure Filter	SF	C22
C14	Order Code - Filter Elements	SE	C22
C15			
C15	High Pressure Filters (Top-mounted)	SF-TM	
	Max. 315 bar / 4560 PSI		
	Max. 1135 l/min / 300 US GPM		
	Technical Data / Dimensions		C23
	Order Code - High Pressure Filter	SF-TM	C26
	Order Code - Filter Elements	SE	C26
C16	High Pressure Filters (Side-mounted)	SF-SM	
	Max. 315 bar / 4560 PSI		
	Max. 1135 l/min / 300 US GPM		
	Technical Data / Dimensions		C27
	Order Code - High Pressure Filter	SF-SM	C30
	Order Code - Filter Elements	SE	C30
	High Pressure Filters (Sandwich)	SFZ	
	Max. 315 bar / 4560 PSI		
	Max. 30 l/min / 8 US GPM		
	Technical Data / Dimensions		C31
	Order Code - High Pressure Filter	SFZ	C34
	Order Code - Filter Elements	SE	C34
	Medium Pressure Filters (Inline)	SFA	
	Max. 160 bar / 2320 PSI		
	Max. 240 l/min / 70 US GPM		
	Technical Data / Dimensions		C35
	Order Code - Medium Pressure Filter	SFA	C38
	Order Code - Filter Elements	SE	C38
	Valves	HV	C39
	Technical Data		
	Order Code		
	Clogging Indicators	HI	C40
	Technical Data		
	Order Code		
	Dimensions		
	Filter Elements	SE	C41
	Technical Data		
	Order Code		
	Flow Characteristics	SF / SF-TM / SF-SM / SFA	C42
	Types		
	Medium Pressure Filters (Inline)	SMPF	
	Max. 110 bar / 1600 PSI		
	Max. 90 l/min / 25 US GPM		
	Technical Data / Dimensions		C45
	Order Code - Medium Pressure Filter	SMPF	C48
	Order Code - Filter Elements	SME	C48
	Clogging Indicators		C49
	Visual Clogging Indicator	HIM-V	
	Visual-Electrical Clogging Indicator	HIM-VE	
	Order Code		
	Flow Characteristics		C50
	Type	SMPF	

Inline Line Filters

	Inline Line Filters	SRFL-S / SRFL-D	
	Max. 14 bar / 200 PSI		
	Max. 7000 l/min / 1850 US GPM		
	Technical Data / Dimensions		C51
	Filter Elements		
	Description		C62
	Order Code		C62
	Differential Pressure Switch with Visual Gauge Indicator		
			C63
	Flow Characteristics		
	Type	SRFL-S / D	C64
	Inline Line Filters	SRFL-SW	
	Max. 16 bar / 232 PSI		
	Max. 13330 l/min / 3521 US GPM		
	Technical Data / Dimensions		C65
	Filter Elements		
	Description		C68
	Order Code		C68
	Differential Pressure Switch with Visual Gauge Indicator		
			C69

Return Line Filters

	Return Line Filters	RF	
	Max. 16 bar / 232 PSI		
	Max. 500 l/min / 130 US GPM		
	Technical Data / Dimensions		C71
	Options - Clogging Indicators		
	Visual Clogging Indicator		C74
	Electrical Clogging Switch		C74
	Flow Characteristics		
	Type	RF	C75
	Return Line Filters	RFA	
	Max. 25 bar / 365 PSI		
	Max. 110 l/min / 30 US GPM		
	Technical Data / Dimensions		C79
	Filter Elements		
	Description		C82
	Order Code		C82
	Options - Clogging Indicators		
	Visual Clogging Indicator		C83
	Flow Characteristics		
	Type	RFA	C84

Return Line Filter

	Return Line Filters	RFB	
	Max. 10 bar / 145 PSI		
	Max. 185 l/min / 52 US GPM		
	Technical Data / Dimensions		C85
	Options - Clogging Indicators		
	Visual Clogging Indicator		C88
	Electrical Clogging Switch		C88
	Flow Characteristics		
	Type	RFB	C89
	Return Line Filter	RFS	
	Max. 25 bar / 365 PSI		
	Max. 1135 l/min / 300 US GPM		
	Technical Data / Dimensions		C91
	Options - Clogging Indicators		
	Visual Clogging Indicator		C94
	Electrical Clogging Switch		C94
	Replacement Filter Elements		
	Description		C95
	Flow Characteristics		
	Type	RFS	C96
	Return Line Filters	RTF10/25	
	Max. 6,9 bar / 100 PSI		
	Max. 95 l/min / 25 US GPM		
	Technical Data / Dimensions		C99
	Options - Clogging Indicators		
	Visual Clogging Indicator		C102
	Electrical Clogging Switch		C102
	Flow Characteristics		
	Type	RTF10/25	C103
	Return Line Filters	RTF20	
	Max. 6,9 bar / 100 PSI		
	Max. 115 l/min / 30 US GPM		
	Technical Data / Dimensions		C106
	Options - Clogging Indicators		
	Visual Clogging Indicator		C107
	Electrical Clogging Switch		C110
	Flow Characteristics		
	Type	RTF20	C110
	Return Line Filters	RTF40	
	Max. 6,9 bar / 100 PSI		
	Max. 378 l/min / 100 US GPM		
	Technical Data / Dimensions		C111
	Options - Clogging Indicators		
	Visual Clogging Indicator		C114
	Electrical Clogging Switch		C114
	Flow Characteristics		
	Type	RTF40	C115
	Return Line Filters	RTF50	
	Max. 6,9 bar / 100 PSI		
	Max. 379 l/min / 100 US GPM		
	Technical Data / Dimensions		C118
	Options - Clogging Indicators		
	Visual Clogging Indicator		C119
	Electrical Clogging Switch		C121
	Flow Characteristics		
	Type	RTF50	C121

Spin-On Filters

Introduction Technical Data Private Labelling		C122
Quick Reference Guide Spin-On Filter Heads Spin-On Filter Elements		C123
 Spin-On Filter Heads Max. 14 bar / 200 PSI Max. 26 l/min / 7 US GPM Technical Data / Dimensions Order Code	SLF-02 / 03 / 04	C124
 Spin-On Filter Heads Max. 14 bar / 200 PSI Max. 90 l/min / 25 US GPM Technical Data / Dimensions Order Code	SAF-05 / 06 / 07 / 11	C125
 Spin-On Filter Heads Max. 14 bar / 200 PSI Max. 128 l/min / 34 US GPM Technical Data / Dimensions Order Code	SAF-10 / 13	C126
 Spin-On Filter Heads Max. 12 bar / 174 PSI Max. 90 l/min / 25 US GPM Technical Data / Dimensions Order Code	SSF-12	C127
 Spin-On Filter Heads Max. 12 bar / 174 PSI Max. 225 l/min / 60 US GPM Technical Data / Dimensions Order Code	SSF-20L	C128
 Spin-On Filter Heads Max. 14 bar / 200 PSI Max. 225 l/min / 60 US GPM Technical Data / Dimensions Order Code	SSF-100 / 120 / 120L / 130 / 160	C129
 Spin-On Filter Heads Max. 14 bar / 200 PSI Max. 300 l/min / 80 US GPM Technical Data / Dimensions Order Code	SSF-150 / 180	C130
 Double Spin-On Filter Heads Max. 12 bar / 174 PSI Max. 454 l/min / 120 US GPM Technical Data / Dimensions Order Code	SSF-24B	C131
 Double Spin-On Filter Heads Max. 12 bar / 174 PSI Max. 454 l/min / 120 US GPM Technical Data / Dimensions Order Code	SSF-24N / 24S	C132
 Double Spin-On Filter Heads Max. 12 bar / 174 PSI Max. 454 l/min / 120 US GPM Technical Data / Dimensions Order Code	SSF-25B	C133
 Double Spin-On Filter Heads Max. 12 bar / 174 PSI Max. 454 l/min / 120 US GPM Technical Data / Dimensions Order Code	SSF-25	C134

Spin-On-Filters

 Tank Top Spin-On Filter Heads Max. 7 bar / 100 PSI Max. 75 l/min / 20 US GPM Technical Data / Dimensions Order Code	SSFT-12B	C135
 Tank Top Spin-On Filter Heads Max. 7 bar / 100 PSI Max. 75 l/min / 20 US GPM Technical Data / Dimensions Order Code	SSFT-12	C136
 Tank Top Spin-On Filter Heads Max. 7 bar / 100 PSI Max. 200 l/min / 53 US GPM Technical Data / Dimensions Order Code	SSFT-20B	C137
 Tank Top Spin-On Filter Heads Max. 7 bar / 100 PSI Max. 200 l/min / 53 US GPM Technical Data / Dimensions Order Code	SSFT-20	C138
 Spin-On Filter Elements Technical Data Dimensions	SFC-35 / 36 SFCT-35 / 36	C139
 Spin-On Filter Elements Technical Data Dimensions	SFC-57 / 58 SFCT-57 / 58	C140
 Spin-On Filter Elements Technical Data Dimensions	SF63	C141
 Spin-On Filter Elements Technical Data Dimensions	SF65	C142
 Spin-On Filter Elements Technical Data Dimensions	SF67	C143
Flow Characteristics	SFC/SFCT-35 / 36 SFC/SFCT-57 / 58 SF63	C144
Flow Characteristics	SF65	C145
Flow Characteristics	SF67	C146
 Clogging Indicators Technical Data	SIS / GV / SIM / CI SIE-NO/NC / EPS/EVS	C147

Filter Systems

Overview

Description
Technical Data

C149

STAUFF System

C150

Offline Filters

OLS

Overview
Dimensions
Technical Data

C151

C152

Order Code - Offline Filter
Order Code - Filter Elements

OLS
SRM

C156

Water Absorbing Offline Filters

OLSW

Overview
Dimensions
Technical Data

C157

C158

Order Code - Water Absorbing Offline Filter
Order Code - Filter Elements
Order Code - Pre-Filter Elements

OLSW
SRM
SF

C162

Heated Offline Filters

OLSH

Overview
Dimensions
Technical Data

C163

C164

Order Code - Heated Offline Filter
Order Code - Filter Elements

OLSH
SRM

C166

Bypass Filters

BPS

Overview
Dimensions
Technical Data

C167

C168

Order Code - Bypass Filter
Order Code - Filter Elements

BPS
SRM

C169

Mounting Options

C170

Hydraulic Symbols / Flow Characteristics

C171

Bypass Lube-Oil Filter

BPLS

Overview
Dimensions
Technical Data

C172

Order Code - Bypass Lube-Oil Filter
Order Code - Filter Elements

BPLS
SRM

C173

Mini Water Vac

SMWV

Overview
Dimensions
Technical Data

C174

Order Code - Mini Water Vac

SMWV

C175

Replacement Filter Elements

SRM

Description
Technical Data

C176

C177

Mobile Filter Systems



Mobile Filter Systems

Overview

SMFS / SCFC / SPFC

C178

Replacement Filter Elements



Replacement Filter Elements

for Single, Double and Automatic Filters

C180





Selection of STAUFF Replacement Filter Elements

Filtration - Why?

Good hydraulic filtration is gaining more and more importance in the use of hydraulic systems.

Reducing contamination in the hydraulic system will reduce the wear of the components and thus extend the service life of the machine. This will prevent production downtime and lower the overall production costs.

Right from the beginning, there is contamination in a new hydraulic system, which reduces the service life of the system and its components such as valves and cylinders without any or with inadequate filtration.

This built-in dirt is created during the manufacturing of the components and mainly consists of coarse particles.

In addition to the contamination that arises during operation of the system, e.g. abrasive wear, dirt particles can also get into the system when it is filled with hydraulic oil. This is called ingress contamination.

Choosing the right filter contributes significantly to prevent the dangers mentioned above thereby ensuring efficient operation even after many years.

Reduction of Contamination

- Extension of service life
- Extension of maintenance intervals
- Reduction of machine downtime
- Reduction of environmental pollution

► Cost savings for the user

Contamination

Particle Sizes (Selection)

- 100 µm table salt, fine sand
- 75 µm diameter of a human hair
- 60 µm flower pollen
- 50 µm fog
- **30 µm (from approx.) resolution of the human eye**
- 15 µm fine particles
- 7 µm red blood cells
- 2 µm bacteria
- 1 µm layer of lubricating film (for comparison)

Type of Contamination

The most frequent ones are:

- Solid particles
- Free and dissolved water
- Non-dissolved air

A majority of the contamination can be removed with filtration.

Origin of Contamination

The main cause of failures and downtimes is dirt in the hydraulic system.

Failure analysis indicate that 70% of the failures are caused by faults in the hydraulic system. 90% of them are caused by impurities in the hydraulic oil.

Sources of External Contamination



- Filling and refilling the hydraulic tank
- Inadequately dimensioned breathers
- Damaged tank seals
- Replacement of hydraulic lines and components (pumps, cylinders)
- Impurities in the air

Types of Internal Contamination

- Contamination on/in the components caused by the manufacturing process (e.g. chips)
- Contamination on the components caused by the installation of the components

Sources of Internal Contamination



- Disintegration of particles from high pressure changes and tension on the surface of hydraulic components (e.g. cavitation)
- Material erosion that occurs at places in the hydraulic units due to the impact of pressurised liquid at high speeds (erosion wear)

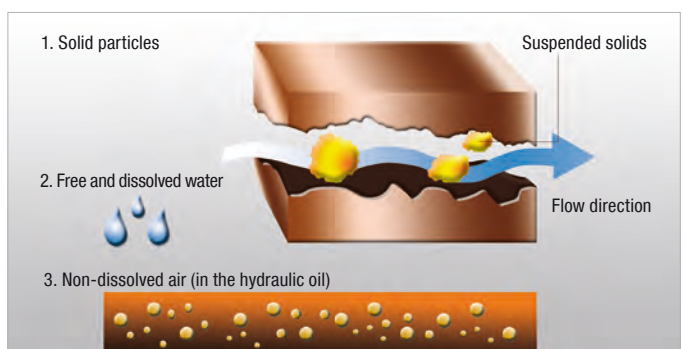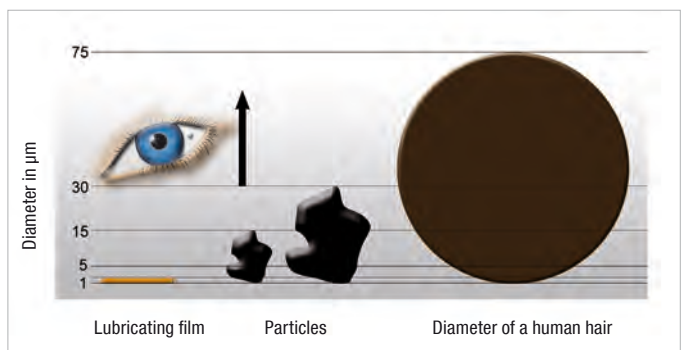



Selection of Components within the Hydraulic Circuit

- | | |
|----------------------------------|--------|
| 1 Oil drum | |
| 2 STAUFF Mobile Filter System | SMFS-U |
| 3 STAUFF Metal Filler Breather | SMBB |
| 4 STAUFF Return Line Filter | RF |
| 5 STAUFF Diffusor | SRV |
| 6 STAUFF Suction Strainer | SUS |
| 7 STAUFF Pressure Filter | SF |
| 8 STAUFF Desiccant Air Breather | SDB |
| 9 STAUFF Plastic Filler Breather | SPB |
| 10 STAUFF Offline Filter | OLS |
| 11 STAUFF Level Gauge | SNA |
| 12 STAUFF Spin-On Filter | SSF |
| 13 Oil tank | |

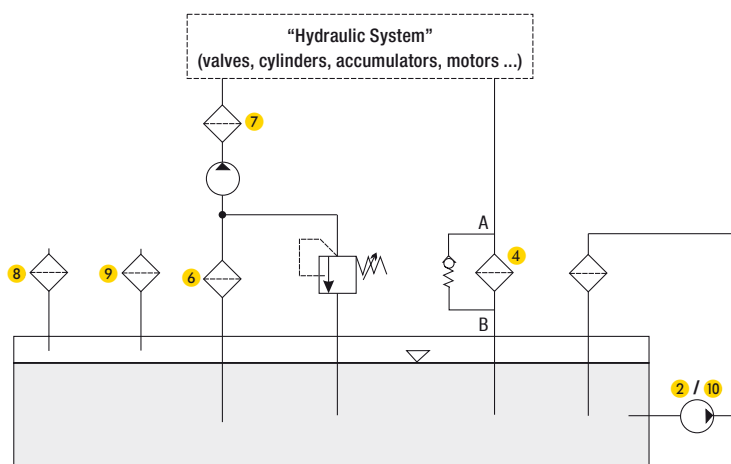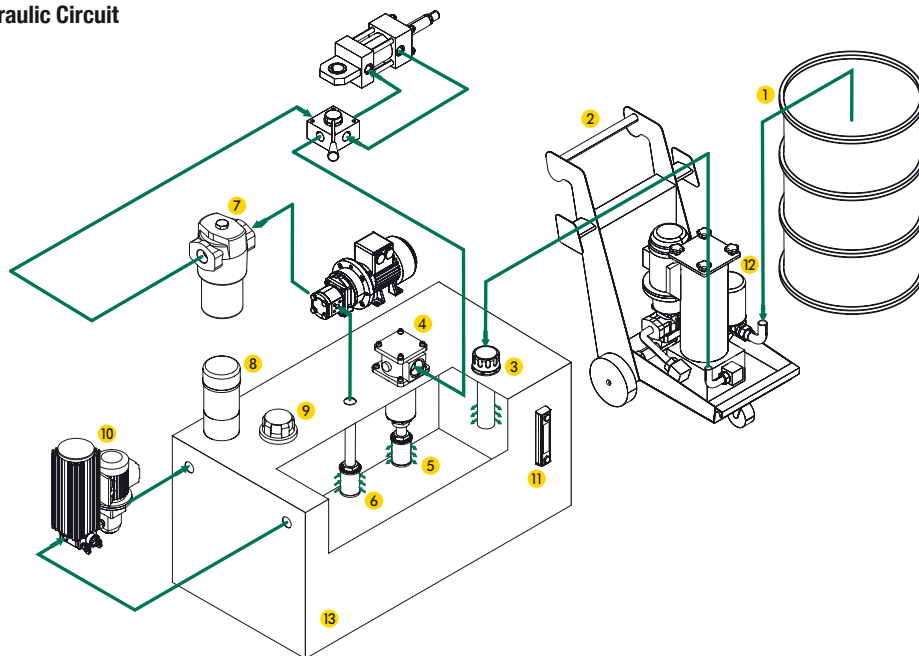

STAUFF Filter Components



High Pressure Filters Series SF / SF-TM / SF-SM / SFZ / SFA (see page C18)



Return Line Filters Series RF / RFA / RFB / RFS / RTF (see page C71)



Diffusers / Suction Strainers / Filler Breathes / Desiccant Air Breathes
(see Hydraulic Accessories chapter)



Offline and Bypass Filters / Mobile Filter Units
(see page C149 and C178)



Spin-On Filters (see page C122)

Pressure Filters 7 are placed behind the pump and clean the hydraulic oil before it flows through down-stream components like valves, cylinders and so on. The main reason for pressure filtration is the protection of downstream, sensitive components.

Eroded particles from the pump are immediately filtered out of the hydraulic oil. Besides working as a protection filter, pressure filters also help to maintain the required purity class.

Because it is placed right behind the pump, a Pressure Filter has to withstand the maximum system pressure. The filter element in the pressure filter also has to withstand the loads and is more intricately constructed, for example as a Return Line Filters element.

Return Line Filters 4 are installed in the return line, on top of or within the oil tank. They filter the hydraulic oil before it flows back into the reservoir. This ensures that contamination arising in the components does not get into the tank. Return Line Filters maintain the targeted purity class like pressure filters. However, because of their arrangement, they do not fulfil the additional function of a protection filter. In contrast to a pressure filter, it only has to withstand low pressure levels.

Diffusers 5 are used in combination with Return Line Filters and ensure that the returning oil flow is settled before it reaches the oil tank thereby preventing foaming and re-suspension of deposited dirt.

The job of **Suction Strainers 6** is mainly to provide functional protection of the downstream pumps in the circulation. Suction Strainers always have to be provided if the risk of pump damage from coarse impurities is particularly high. This risk exists if impurities are collected in the tank and if they can't be filtered out afterwards. Suction Strainers are coarse filter elements with a micron rating that is usually bigger than 100 µm.

Filler Breathes 3 / 9 are mounted on the oil tank and prevent the entry of dirt from the surroundings during tank breathing. They should be chosen with a filter unit that is similar to the working filter (Pressure Filter, Return Line Filter).

The replacement cycles of filter inserts is highly dependent on the surrounding conditions of the hydraulic system.

Another variant of the breather is the **Desiccant Air Breather 8**. The additional function of this filter is dehumidification of the inflowing air with a special silicate gel.



Offline / Bypass Filters 10 are not part of the main hydraulic system. They are supplementary to achieve the best possible filtration results. Because of the high efficiency of the Offline / Bypass Filters, purity levels are reached that cannot be achieved with conventional main filter systems.

Offline Filters work with an integrated motor/pump unit that draws in the fluid from the system, filters it and then feeds it back into the tank. Because the offline filter is independent from the hydraulic main circuit, i.e. it can still be operated if the hydraulic system is switched off, it is used in practice for continuous cleaning of the tank.

Bypass Filters on the other hand use the existing system pressure to draw a small volumetric flow out of the hydraulic system for filtration. They are only active while the unit is in operation.

Another mobile variant of the bypass filter is the **Mobile Filter System 2**.

STAUFF provides a complete range of **Spin-On Filters 12** which can be used either as suction filters or as return line filters for low pressure applications.

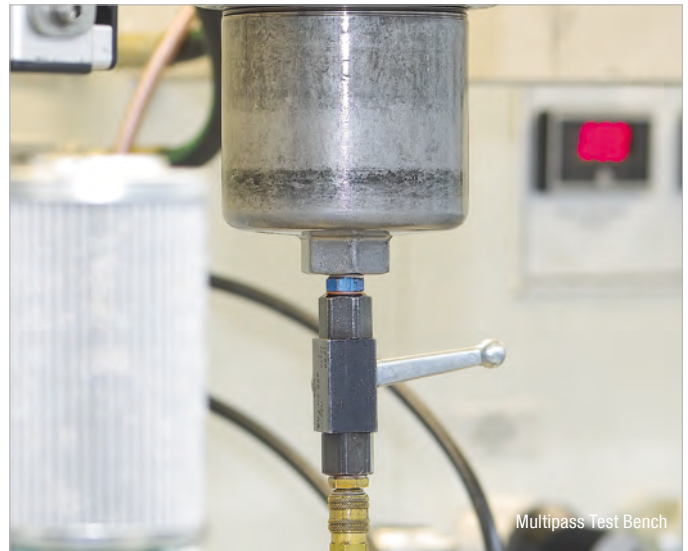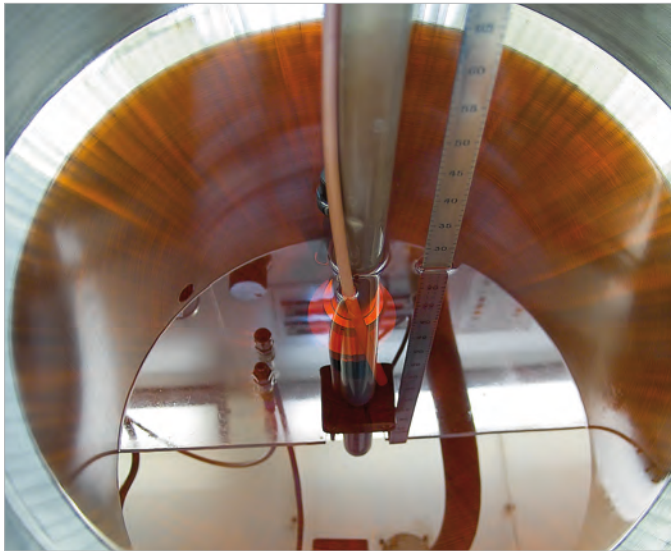

Test Standards and Oil Purity

Definition of the Required Micron Rating

Essentially, the components found in the hydraulic system determine the micron rating of the filtration system.

To guarantee a reliable mode of operation over the years, it is mandatory to maintain the optimum oil purity class for specific components.

The most sensitive component determines the choice of filter material and micron rating.

To determine the oil purity according to ISO 4406 (1999), a laser particle counter is used to count particles that are $>4 \mu\text{m}_{(c)}$, $>6 \mu\text{m}_{(c)}$ and $>14 \mu\text{m}_{(c)}$ in 100 ml of hydraulic oil. The number of particles is then assigned a classification number (e.g. 14/11/8) that then corresponds to the ISO purity class. Please note here that the number of particles doubles for the next higher class. The cleanliness level that has to be achieved is an important criterion for choosing the right filtration system.

STAUFF Filter Elements are Subject to the Following Test Methods

- ISO 2941 Collapse and burst resistance
- ISO 2942 Verification of fabrication integrity (bubble point test)
- ISO 2943 Compatibility with hydraulic media
- ISO 3723 End load test
- ISO 3724 Flow fatigue characteristics
- ISO 3968 Flow characteristics
- ISO 16889 Filtration performance test (multi-pass method)

Number of particles in 100 ml fluid		Classification numbers ISO 4406 (1999)		
More than	Less than	$> 4 \mu\text{m}_{(c)}$	$> 6 \mu\text{m}_{(c)}$	$> 14 \mu\text{m}_{(c)}$
16000000	32000000	25	25	25
8000000	16000000	24	24	24
4000000	8000000	23	23	23
2000000	4000000	22	22	22
1000000	2000000	21	21	21
500000	1000000	20	20	20
250000	500000	19	19	19
130000	250000	18	18	18
64000	130000	17	17	17
32000	64000	16	16	16
16000	32000	15	15	15
8000	16000	14	14	14
4000	8000	13	13	13
2000	4000	12	12	12
1000	2000	11	11	11
500	1000	10	10	10
250	500	9	9	9
130	250	8	8	8
64	130	7	7	7
32	64	6	6	6
16	32	5	5	5



STAUFF Laser Particle Counter
LasPaC-II and Bottle Sampler

Short & Curt: Filter Rating

(For exact recommendation see SCCP - STAUFF Contamination Control Program see page C15.)

Type	Component	ISO 4406 Code	Recommended Filter Rating
Pump	Piston Pump (Slow Speed, Inline)	22/20/16	20 µm
	Gear Pump	19/17/15	20 µm
	Vane Pump	18/16/14	5 µm
	Piston Pump (High Speed, Variable)	17/15/13	5 µm
Motor	Gear Motor	20/18/15	20 µm
	Vane Motor	19/17/14	10 µm
	Radial Piston Motor	19/17/13	10 µm
	Axial Piston Motor	18/16/13	5 µm
Valve	Directional Valves (Solenoid)	20/18/15	20 µm
	Check Valves	20/18/15	20 µm
	Logic Valves	20/18/15	20 µm
	Cartridge Valves	20/18/15	20 µm
	Pressure Control Valves (Modulating)	19/17/14	10 µm
	Flow Control Valves	19/17/14	10 µm
	Standard Hydraulic <100 bar / <1450 PSI	19/17/14	10 µm
	Proportional Valves	18/16/13	5 µm
	Servo Valves <210 bar / <3045 PSI	16/14/11	3 µm
	Servo Valves >210 bar / >3045 PSI	15/13/10	3 µm
Actuator	Cylinder	20/18/15	20 µm

β-Value and Separations Efficiency

To select filtration that meet the requirements, performance characteristics like the filter fineness, the filtration efficiency, the dirt-hold capacity and the pressure loss has to be observed.

The β-value as per ISO 16889 is the relevant characteristic value for filtration efficiency. The β-value is the ratio of particles before ($N_{up\ x}$) and after ($N_{down\ x}$) the filter related to a specific particle size x.

$$\beta_x = \frac{N_{up\ x}}{N_{down\ x}}$$

$\beta_{10} > 200$ means that of 1000 particles that are 10 µm in size, only five particles can pass through the filter. 995 particles will be trapped by the filter element.

Popular filters with inorganic glass fibre medium have to achieve a β-value of at least 200 in order to meet the demands placed on hydraulic filtration today.

The filtration efficiency, also called the retention rate, is directly related to the β-value and is calculated as follows:

$$E = \frac{(\beta_x - 1)}{\beta_x}$$

$\beta_{10} > 200$ corresponds to filtration efficiency of 99,5%.

Comparison of the β-Value and Efficiency E (each related to a defined Particle Size)

β-value	Filtration Efficiency E
1	0,00 %
2	50,00 %
10	90,00 %
25	96,00 %
50	98,00 %
75	98,67 %
100	99,00 %
200	99,50 %
1000	99,90 %
9999	99,99 %

The **dirt-hold capacity** (DHC) shows how much solid dirt a filter element can hold before it has to be replaced. The dirt-hold capacity is therefore the most important parameter in the filter service life.

The **differential pressure** (Δp) is another important criterion for the configuration of the filter. Ensure that the size of the filter element is chosen according to the calculation guideline by STAUFF.

To guarantee optimum filtration, the β-value, the dirt-hold capacity (DHC) and the differential pressure (Δp) must be carefully matched.

Filtration Terminology

β-value

The β-value as per ISO 16889 is the relevant characteristic value for filtration efficiency. The β-value is the ratio of particles before ($N_{up\ x}$) and after ($N_{down\ x}$) the filter related to a specific particle size x.

$$\beta_x = \frac{N_{up\ x}}{N_{down\ x}} \quad (\text{see page C11})$$

Cavitation Damage

Cavitation is defined to be the cavity formation in liquids. Cavitation occurs if the local static pressure of a liquid drops below a critical value. This critical value usually corresponds to the vapour pressure of the liquid. Critical effects of cavitation are:

- Cavitation wear
- Undissolved gas in the hydraulic system
- Loud high-frequency noises
- Local high temperatures in the liquid
- Changes to the resistance characteristics of the hydraulic resistance

Cleanliness Level

The cleanliness level of a hydraulic fluid is defined by the number of solid particles per ml of fluid. The number of particles is usually measured with an automatic particle counter. The cleanliness level is determined by a class code created by counting the number of particles of different sizes.

Particle counting as well as the coding of the cleanliness class for hydraulic oils are described in the ISO 4406 (1999) standard. Beside the ISO 4406 (1999), NAS 1638 (1964) and SAE AS4059 Rev. D (2001) are also still common.

Clogging Indicator

The clogging indicator signals a specific pressure level where the soiled filter element should be replaced. They work with differential pressure (Δp) or back pressure. Clogging indicators are available in visual, electrical and visual/electrical versions. While it is the responsibility of the installation or maintenance personnel to check the degree of clogging of the filter element with visual clogging indicators, a signal contact (switch) can be connected to the machine controller with an electrical or visual/electrical clogging indicator.

Collapse Pressure

The permissible collapse pressure according to ISO 2941 is understood to be the pressure difference that a filter element can withstand with the stipulated direction of flow. Exceeding the collapse pressure results in the destruction of the filter element.

Depth Filter

Impurities penetrate into the filter fabric and are retained by the structure of the filter fabric. Mainly cellulose and inorganic glass fibre media are used in hydraulic filters. For special applications, plastic media (high-strength) and metal fibre media are also used. The design of the depth filter combines the highest micron rating with a high dirt retention capacity. Due to the fleece-like structure of depth filters, particles are not only separated on the surface of the filter material, but they can penetrate into the filter material, which leads to a considerable increase of the effective filter area. In contrast to sieves, there are no holes in fleece, rather they practically consist of labyrinths in which the particles are trapped. Hence, there is no sharply defined screening, rather a wide range of particles are trapped.

Differential Pressure

The differential pressure (Δp) is defined as the pressure difference between the filter inlet and the filter outlet, or alternatively in front of and behind the filter element.

Exceeding the maximum permissible pressure differential leads to the destruction of the filter element.

A bypass valve integrated in the filter prevents destruction of the filter element by opening if the differential pressure (Δp) is too high. Then the oil is passed unfiltered into the hydraulic circuit. For applications in which no unfiltered oil is allowed to pass into the hydraulic circuit, there is the possibility of using filters without bypass valves with filter elements that can withstand a high differential pressure (Δp). The filter elements must be designed such that they can withstand the maximum expected differential pressure (Δp).

Dirt-Hold Capacity (DHC)

The dirt-hold capacity (DHC) shows how much solid dirt a filter element can hold. It is measured in the multipass test according to ISO 16889

EPDM

Ethylene-Propylene-Diene-Monomer-rubber (EPDM) is used as a material for O-rings because of its chemical resistance.

Filter

A filter (hydraulic filter) has the job of keeping solids out of a liquid (oil). A filter is usually made of a filter housing and a filter element.

Filter Area

The filter area is the size of the theoretically spread-out filter element. The larger the filter area, the lower the flow resistance of the filter element. Simultaneously, the dirt-hold capacity (DHC) increases. The following applies in general: the larger the filter area, the longer the service life of the element. Basically the filter area can be enlarged by the number of pleats.

Filter Cake

A filter cake is made up of the particles trapped on the surface of a filter medium.

Filter Design

Essentially depends on the following factors: specific flow rate, cleanliness level, amount of contamination, the maximum pressure setting and the required filter service life.

Filter Element

The filter element is located in the filter housing and performs the actual filtering task.

Filtration Efficiency

Filtration efficiency η is a measure of the effectiveness of a filter element for separating solid particles. It is given in percent (see page C11).

Filter Housing

Depending on the application, the filter housing is built into the pressure or return line and must be designed for the specific operating or system pressure and the flow rate. The filter element is located in the filter housing. Depending on the application, the filter housing may be equipped with a bypass valve, a reversing valve, a clogging indicator and other options.

Filter Material

The choice of the right filter material is dependent on different criteria. Amongst others, this includes the type of application, the filter function, degree of contamination or alternatively the required dirt-hold capacity (DHC) as well as requirements of chemical or physical resistance. The following list gives you an overview of how these filter materials differ with regard to specific properties:

Inorganic Glass Fibre

Inorganic Glass Fibre media are among the most important materials in modern filtration. During production, selected fibres (1 mm ... 5 mm long and with a diameter of 3 µm ... 10 µm) are processed into a specific mix. The manufacturing process is very similar to paper production. The fibres are bound with a resin and impregnated. The benefit compared to cellulose paper is a fibre structure that is considerably more homogenous and consequently has larger open pores. As a result, lower flow resistance is achieved.

- Based on Glass Fibres with acrylic or epoxy resin binding
- High retention and dirt-hold capacity (DHC)
- Excellent separation efficiency of the finest particles due to the three-dimensional labyrinth structure with depth filtration
- Outstanding price/performance ratio

Filter Material (Continuation)
Polyester

- 100% Polyester Fibres with thermal bonding
- High pressure differential resistance
- Good chemical resistance
- High separation efficiency of the finest particles
- Tear-proof structure
- No static charging

Cellulose

- Filter material made of Cellulose Fibres with special impregnation
- Variants with the lowest price with good dirt retention capacity
- Not suitable for water based media

Metal Fibre

- Sintered Metal Fibres with three-dimensional labyrinth structure for depth filtration
- Low flow resistance with high dirt-hold capacity
- Excellent chemical and thermal resistance

Stainless Steel Wire Mesh

Filter elements with a Metal Wire Mesh are often used as a conditionally reusable solution in protection filters, suction filters or return line filters. Depending on the requirements (micron rating, pressure, dynamics) different types of mesh are used like twill, linen, or also Dutch weave.

- Wire mesh fabric made of material 1.4301 for surface filtration (other material on request)
- Low flow resistance due to large-pored screening surface
- Excellent chemical and thermal resistance
- Cleanable

Flow Rate

This is the amount of fluid that flows past a specific cross-section per unit time. It is given in litres per minute (l/min) or gallons per minute (US GPM).

FPM (Viton®)

Fluorinated rubber is used as a material for O-rings and is characterised by its outstanding resistance to high temperatures, mineral oils, synthetic hydraulic fluids, fuels and chemicals.

Hydraulic Fluid

A pressure liquid is defined to be a fluid used in hydraulic and lubrication systems. According to ISO 6743, the fluids are divided into mineral oil based, flame resistant and biodegradable liquids.

Micron Rating

Regarding micron rating, we must differentiate between the filter materials that are used. To define the micron rating for Inorganic Glass Fibre filter elements, the β -value as per ISO 16889 is commonly used.

Multipass Test

The Multipass Test evaluates the performance of a filter element. Standardised in ISO 16889-2008, this test allows comparable and repeatable results of the elements performance. If a normal filter element life is between a few weeks up to several months, this test reduces this life down to 90 minutes. The element is subjected to a fluid that a large amount of a special test dust ISO MTD contains. Results are given for the β -ratio, dirt-hold capacity (DHC) and differential pressure. It is used for designing hydraulic circuits, developing new filter materials and comparison of different filter elements.

See also page C10 and page C11 to get more information about the outcome data. In former time this test was also known as the Multipass Test ISO 4572.

NBR (Buna-N®)

Nitrile rubber is the most commonly used elastomer for O-rings and other sealing devices. Also known as Buna, Nitrile is a copolymer of Butadiene and Acrylonitrile (ACN). The name Buna N is derived from Butadiene and Natrium (the Latin name for Sodium, the catalyst used in polymerizing Butadiene). The "N" stands for Acrylonitrile.

Nominal Flow Rate

The nominal flow rate describes the flow rate or the volumetric flow rate for which the respective filter has been designed. It is usually given in litres per minute (l/min) or US Gallons per minute (US GPM) and is an important parameter in the filter design.

Nominal Pressure

Pressure for which the filter is designed and which it can be identified with.

Operating Pressure / System Pressure

Maximum pressure with which the filter may be used.

Surface Filter

Impurities are separated on the surface of the filter element. Surface filters are designed to have uniform pores (gaps), therefore they can almost completely retain specific particle sizes. Surface filters are made of Metal Wire Mesh or Cellulose materials.

Other surface filters are metal-edge filters.

Valve

Bypass Valve

A bypass valve is a valve that is integrated in a filter or filter element and allows the oil to bypass the contaminated filter element if a defined pressure differential is exceeded. Bypass valves are used to protect the filter element.

Non-Return Valve

It prevents the continuation line from draining while the filter element is changed.

Reverse Flow Valve

It is used to bypass the filter element for reversible oil flow so that the fluid does not pass through the filter element in the reverse direction.

Multi-Function Valve

A combination of bypass, reverse flow and non-return valve.

Viscosity

The viscosity of a fluid describes the flow behavior of a liquid. There are the kinematic viscosity ν with the unit "m²/s" and the dynamic viscosity η with the unit "Ns/m²". In the field of filtration, in the design of filters the kinematic viscosity is required for calculating. The kinematic viscosity ν can also be calculated with the dynamic viscosity η and density ρ :

$$\nu = \frac{\eta}{\rho}$$

The kinematic viscosity unit is "mm²/s", before it was called centistokes or Stokes (1 cSt = 1 mm²/s = 10⁻⁶ m²/s). The unit of dynamic viscosity is "Ns/m²", it was previously reported in Poise (10 P = 1 Ns/m² = 1 Pa s).

Choice of Filters

Choice of a Suitable Micron Rating

Generally, the type of components incorporated in the hydraulic system will determine the micron rating required. It has been clearly demonstrated that system components will operate reliably for years if a specific minimum oil cleanliness grade is maintained. Frequently the choice will be determined by the most sensitive component in the system.

a) Operating Filter

To get a rough, first rating of what filter is needed to assure a certain oil cleanliness grade please have a look at page C11.

Apart from the specific flow rate (l/min per cm² of filter area), other factors such as operating environment and condition of seals and breathers can have an effect on the cleanliness grade which can actually be achieved.

b) Protective Filter

Occasionally, protective filters are fitted downstream of major components, e.g. the pump, to collect the debris in case of a catastrophic failure. This avoids total stripping and flushing of the system. For economic reasons, protective filters are normally one grade coarser than the operating filters since they do not significantly contribute to the cleaning of the system and this extends filter service intervals.

Choice of the Optimum Filter

In selecting the filter, the following information must be considered:

- Maximum flow volume (Q_{\max}) through the filter including surge flows
- Kinematic viscosity (ν) of the fluid in mm²/s (cSt) at cold start temperature and operating temperature
- Density ρ of the fluid
- Micron rating (μm): see table on page C11
- Filter material

The aim is to choose a filter whose total differential pressure (Δp) is not higher than $\Delta p_{\max} = 1,0$ bar (for pressure filters) or $\Delta p_{\max} = 0,5$ bar (for return line filters), in a clean state at the normal operating temperature. These values have been proven in practice to give the optimum service life for the element.

The nominal flow volume of the filter is the obvious reference value for pre-selection and this should be larger than the flow to be filtered.

$$Q_{\text{nom}} > Q_{\max}$$

Calculations based on the filter data will verify whether the pre-selected filter meets the requirements, at operating temperatures:

$$\begin{aligned} \Delta p_{\max} &\leq 1,0 \text{ bar (for pressure filter)} \\ \Delta p_{\max} &\leq 0,5 \text{ bar (for return line filter)} \end{aligned}$$

The total differential pressure of the assembly Δp_{Assy} is calculated by adding the differential pressure of the housing Δp_{Hous} and that of the element Δp_{Elem} . Both the kinematic viscosity and density of the operating medium should be considered for the selection, as the flow curves on the pages following have been determined with a kinematic viscosity of $\nu = 30$ cSt and a density of $\rho = 0,86$ kg/dm³. The values of the pressure drops for the Δp_{Hous} and the Δp_{Elem} can be read from the flow curves on the pages following. The values for the kinematic viscosity in cSt and the density in kg/dm³ should be inserted into the following formula:

$$\Delta p_{\text{Assy}} = \frac{\rho}{0,86} \cdot \Delta p_{\text{Hous}} + \frac{\rho}{0,86} \cdot \frac{\nu}{30} \cdot \Delta p_{\text{Elem}}$$

The filter size is suitable if the $\Delta p_{\text{Assy}} < \Delta p_{\max}$.

If the calculated Δp_{Assy} is higher than Δp_{\max} select the next larger filter size and re-calculate until a satisfactory solution is found.

The following two examples explain and help to understand the procedure of calculating a filter. For daily business, it is much easier to use a tool like the "STAUFF Filter Selection" Software. (See page C15)

Examples of Calculation

Example 1: Selection Pressure Filter

System Information: A pressure filter with an Inorganic Glass Fibre element is required immediately after the pump. The system has standard components and is operating at pressures up to 200 bar. The filter shall be fitted with a bypass valve and a visual clogging indicator.

For better understanding only the calculation at the upper temperature is carried out.

Data given:	Q_{\max} :	100 l/min
	Oil type:	ISO 68
	Temperature max.:	+50°C
	Viscosity $\nu_{\text{operating}}$:	44 mm ² /s
	Density ρ :	0,882 kg/dm ³
	Micron rating:	10 μm (see table on page C11)

First Step

Pre-selection of the size: SF 045, $Q_{\text{nominal}} = 160$ l/min $> Q_{\max}$

Pressure drop values (at viscosity of 30 mm²/s) from the flow characteristics:

$$\begin{aligned} \Delta p_{\text{Hous}} &= 0,15 \text{ bar} & (\text{SF 045 ... , see page C38}) \\ \Delta p_{\text{Elem}} &= 0,77 \text{ bar} & (\text{SE-045 G 10 B, see page C40}) \end{aligned}$$

Determination of the correction factor:

$$\Delta p_{\text{Assy}} = \frac{0,882}{0,86} \cdot 0,15 \text{ bar} + \frac{0,882}{0,86} \cdot \frac{44}{30} \cdot 0,77 \text{ bar}$$

$$\Delta p_{\text{Assy}} = 1,31 \text{ bar} \geq \Delta p_{\max} = 1,0 \text{ bar}$$

Since the actual pressure drop is larger than the allowed pressure drop, a larger filter has to be chosen.

Second Step

Selection of the next larger filter size: SF 070, $Q_{\text{nominal}} = 240$ l/min $> Q_{\max}$

$$\begin{aligned} \Delta p_{\text{Hous}} &= 0,15 \text{ bar} & (\text{SF 070 ... , see page C38}) \\ \Delta p_{\text{Elem}} &= 0,45 \text{ bar} & (\text{SE-070 G 10 B, see page C40}) \end{aligned}$$

$$\Delta p_{\text{Assy}} = \frac{0,882}{0,86} \cdot 0,15 \text{ bar} + \frac{0,882}{0,86} \cdot \frac{44}{30} \cdot 0,45 \text{ bar}$$

$$\Delta p_{\text{Assy}} = 0,83 \text{ bar} \leq \Delta p_{\max} = 1,0 \text{ bar}$$

In a clean state, this filter fulfills the requirements and is suitable for the application. The correct filter designation would be **SF070G10B-TB/B/V**.

Example 2: Selection Return Line Filter

System Information: A return line filter with a Cellulose element with a micron rating of 10 µm is required to clean the oil. No clogging indicator is required.

Please note: If the system incorporates either accumulators or cylinders, the return flow can dramatically exceed pump flow and the maximum surge flow should be the flow used to calculate the pressure drop through the filter.

Data given: Q_{max} : 100 l/min
Oil type: ISO 68
Temperature max.: +60°C
Viscosity $\nu_{operating}$: 29 mm²/s
Density ρ : 0,882 kg/dm³
Micron rating: 10 µm (see table on page C11)

First Step

Pre-selection of the size: RF 030, $Q_{nominal} = 110 \text{ l/min} > Q_{max}$

Pressure drop values (at viscosity of 30 mm²/s) from the flow characteristics:

$\Delta p_{Hous} = 0,30 \text{ bar}$ (RF 030 ..., see page C76)
 $\Delta p_{Elem} = 0,067 \text{ bar}$ (RE-030 N 10 B, see page C76)

Determination of the correction factor (see page C14):

$$\Delta p_{Assy} = \frac{0,882}{0,86} \cdot 0,30 \text{ bar} + \frac{0,882}{0,86} \cdot \frac{29}{30} \cdot 0,067 \text{ bar}$$

$$\Delta p_{Assy} = 0,37 \text{ bar} \leq \Delta p_{max} = 0,5 \text{ bar}$$


In a clean state, this filter fulfills the requirements and is suitable for the application. No further calculation is necessary. The correct filter designation would be **RF030N10B/B**.

Filter Selection Software

For daily business, it is much easier to use a software tool for the calculation of filters.

The STAUFF Filter Selection Software gives outstanding support in calculating and choosing a well-dimensioned filter. The tool assists in calculating the right size and creates a technical and order data sheet.

Please contact STAUFF or your distributor for a free copy of the STAUFF Filter Selection Software.

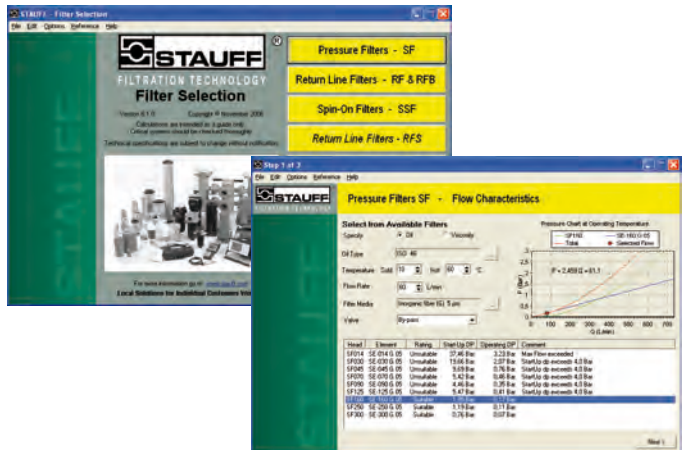

STAUFF Contamination Control Program (SCCP)



The STAUFF Contamination Control Program provides you with a proactive system to control the contamination levels in your hydraulic system.

We offer a Contamination Control Seminar, which includes a PowerPoint presentation and printed literature (English language only).

Topics covered include:

- Failures in hydraulic systems
- Contamination types and sources
- Damage caused by contamination
- Fluid cleanliness levels
- Target cleanliness levels
- Contamination control basics
- Filter efficiency
- Measuring fluid level cleanliness
- Practical applications of filtration

To arrange for a presentation contact STAUFF or your distributor.

Besides that, STAUFF has also a wide range of training tools and filtration software to support the proper application of filter systems and products. Software includes filter sizing programs as well as training presentations.


Contact STAUFF for more information.



The new STAUFF 4PRO Glass Fibre Elements

The PLUS for customers:

- Longer operating times through higher dirt holding capacity
- Improved energy efficiency through lower pressure differential
- Excellent β values and outstanding β stability

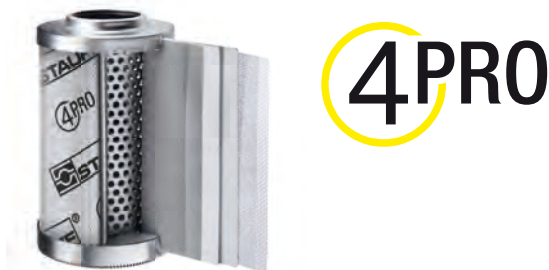

The 4Pro stands for 4 pros that characterise STAUFF glass fibre materials:

- **proACTIVE**
- **proGRESSIVE**
- **proFESSIONAL**
- **proTECTION**

Or simply: **Fo(u)r Protection**

In terms of the β value, STAUFF elements have always exhibited excellent performance. For those who take filtration seriously, there's no other valid approach – the measured values must hold up under any inspection. The elements cannot afford any vulnerabilities. The new generation of elements also have excellent dirt holding capacities. Values that users have been looking for. Values that make it possible for the user to extend operating times thereby providing significant reductions to purchasing costs for elements as well maintenance costs.

Protecting Filter Elements Against Direct Flow Impact

The sensitive filter bellows on filter elements are frequently prone to damage during transportation, storage and filter replacement work. In addition, large particles in the flow of fluid may harm the filter material.

STAUFF offers a solution: SE and RE series filter elements with protective sheath (only available for glass fibre elements). This is a thin, perforated plastic sheet that completely encases the pleats of the filter from the outside as well as making the element more stable. A further positive effect is that the volume of flow is distributed more evenly by the protective sheath, thus ensuring an efficient flow rate.

In its standard version, the foil is printed with the STAUFF 4PRO logo, eliminating any mix-up with other brands. Larger quantities can also be produced with a customised imprint on the sheath.

β value

Key evaluation criteria for filter elements using glass fibre technology are the retention rate (micron rating) the β value, the β stability, the dirt holding capacity and the initial pressure differential. These values are determined using the multipass test established by ISO 16889.

The designation for STAUFF elements typically includes a rating based on filter fineness.

Filter designation β value > 200 according to ISO 4406	$\beta_{(c)} > 200$ ISO 11171	$\beta_{(c)} > 1000$ ISO 11171
03	4,0 $\mu\text{m}_{(c)}$	4,5 $\mu\text{m}_{(c)}$
05	5,0 $\mu\text{m}_{(c)}$	6,0 $\mu\text{m}_{(c)}$
10	8,8 $\mu\text{m}_{(c)}$	11,0 $\mu\text{m}_{(c)}$
20	21,0 $\mu\text{m}_{(c)}$	23,0 $\mu\text{m}_{(c)}$

STAUFF impresses in particular with its:

- Innovative research, design and development
- Modern production lines with complete monitoring of production
- Certified work processes in accordance with:
 - ISO 9001: 2008 Quality management
 - ISO 14001: 2004 Environment protection
 - OHSAS 18001: 2007 Occupational health and safety
- Comprehensive stocks and quick delivery
- Customised products in accordance with customer drawings or on the basis of STAUFF designs
- Comprehensive worldwide network of wholly-owned subsidiaries and sales partners

The development and manufacture of STAUFF filter elements are subject to strict testing in accordance with:

- ISO 2941 Collapse and burst resistance
- ISO 2942 Verification of fabrication integrity (bubble point test)
- ISO 2943 Compatibility with hydraulic media
- ISO 3723 End load test
- ISO 3724 Flow fatigue characteristics
- ISO 3968 Flow characteristics
- ISO 16889 Filtration performance test (multi-pass method)

Interchanging STAUFF Filter Elements

As well as original Filter Elements for our own filter housings, STAUFF also provides access to a comprehensive range of Replacement Filter Elements. They match the quality and can be installed in the products of for example:

- Argo-Hytos
- Donaldson
- Eppensteiner
- Fairey Arlon
- Hydac
- Mahle
- Internormen
- Pall
- Parker
- Other types are available on request

STAUFF offers many options for filter conversion, design and calculation and in so doing supports interested parties and customers with the design of efficient solutions:

- Printed conversion catalogue, available in a five-language version
- Online filter search with more than 65000 data sets under www.filterinterchange.com
- Offline filter database with deposited measurements, filter surfaces and drawings
- Filter selection software for easy filter design and calculation

Thanks to their excellent dirt-hold capacity, all of the filter products supplied by STAUFF have an impressive long service life and high β value stability:


- Inorganic glass fibre, filter paper, stainless fibre (micron ratings between 3 μ m and 20 μ m respectively) as well as stainless mesh (micron ratings between 10 μ m and 500 μ m)
- Maximum differential pressure depending on filter media and application for the options 16 bar / 232 PSI, 30 bar / 435 PSI or 210 bar / 3000 PSI.

Your local STAUFF Distributor will assist you interchanging to STAUFF elements.

Know-how in pocket format

You can use the STAUFF online Interchange database for replacement filter elements on your Smartphone as well!

Simply **scan the QR code** displayed underneath or activate the browser on your Smartphone, enter **www.filterinterchange.com** and save the website under favorites or place into your home screen.



www.filterinterchange.com

Replacement Filter Elements for Applications involving Hydraulic and Lubrication Oils

RE - 045 G 20 B - 1650 / 4

1

2

3

4

5

6

7

1 Type

Series	Filter Element
Argo-Hytos High Pressure Filter Element	SD
Argo-Hytos Medium Pressure Filter Element	MD
Argo-Hytos Return-Line Filter Element	RD
Eppensteiner High Pressure Filter Element	SS
Eppensteiner Return-Line Filter Element	RS
Fairey Arlon High Pressure Filter Element	SA
Fairey Arlon Return-Line Filter Element	RA
Hydac High Pressure Filter Element	SE
Hydac Return-Line Filter Element	RE
Mahle High Pressure Filter Element	SL
Mahle Return-Line Filter Element	RL
Internormen High Pressure Filter Element	SN
Internormen Return-Line Filter Element	RN
Pall High Pressure Filter Element	SP
Pall Return-Line Filter Element	RP
Medium Pressure Filter Element according to standard	NL
Return-Line Filter Element according to standard	NR
Special Element STAUFF	SXX

Note: Other series on request

2 Nominal Size

Depending on the nominal flow or element length

3 Filter Material and Pressure Setting

Metal fibre, high collapse pressure	A, M
Stainless wire mesh, low collapse pressure	B, S
Polyester fibre, high collapse pressure	C, Q
Filter paper, low collapse pressure	D, K, L, N
Inorganic glass fibre, low collapse pressure	E, G
Inorganic glass fibre, high collapse pressure	F, H
Stainless wire mesh, high collapse pressure	R, T, W

4 Micron Rating

Stainless wire mesh	
10 μ m	10
25 μ m	25
40 μ m	40
50 μ m	50
60 μ m	60
80 μ m	80
100 μ m	100
125 μ m	125
150 μ m	150
200 μ m	200
250 μ m	250
500 μ m	500
Stainless metal fibre	
3 μ m	03
5 μ m	05
10 μ m	10
20 μ m	20
Filter paper	
10 μ m	10
20 μ m	20
Inorganic glass fibre	
3 μ m	03
5 μ m	05
10 μ m	10
15 μ m	15
20 μ m	20
Polyester fibre	
3 μ m	03
5 μ m	05
10 μ m	10
20 μ m	20

Note: Other micron ratings on request

5 Sealing Material

NBR / Perbunan	B
FPM (Viton®)	V
EPDM	E

Note: Other sealing materials on request.

6 STAUFF Special Number

If element varies from the standard type	X
--	---

7 Design Code

Only for information	X
----------------------	---

Pressure Filters ■ Types SF / SF-TM / SF-SM / SFZ / SFA



SF



SF-TM



SF-SM



SFZ



SFA

Product Description

STAUFF Pressure Filters are designed for in-line hydraulic applications or manifold mounting, with a maximum operating pressure up to 420 bar / 6000 PSI. Used together with STAUFF SE series Filter Elements, a high efficiency of contaminant removal is assured. The high dirt-hold capacity of the elements ensures long service life and, as a result, reduced maintenance costs.

Technical Data

Construction

- SF: Designed for in-line assembly, with threaded mounting holes on top of the head.
- SF-TM: Designed for manifold mounting, with mounting holes and fluid ports on top of the head.
- SF-SM: Designed for manifold mounting, with mounting holes and fluid ports on side of the head.
- SFZ: Designed for sandwich plate mounting
- SFA: Designed for in-line assembly, with threaded mounting holes on top of the head.

Materials

- Filter head: Spheriodal Graphite Cast Iron
Free Cutting Steel (only SF-TM014-070 and SFZ)
SFA: Aluminium
- Filter bowl: Cold Drawn Steel
SFA: Aluminium
- O-rings: NBR (Buna-N®)
FPM (Viton®)
EPDM (Ethylene-Propylene-Diene-Monomer-Rubber)
- Support ring: PTFE (Polytetrafluoroethylene)

Operating Pressure

- SF: max. 420 bar / 6000 PSI
- SF-TM: max. 315 bar / 4560 PSI
- SF-SM: max. 315 bar / 4560 PSI
- SFZ: max. 315 bar / 4560 PSI
- SFA: max. 160 bar / 2320 PSI

Temperature Range

- -10 °C ... +100 °C / +14 °F ... +212 °F

Filter Elements

- Specifications see page C41

Media Compatibility

- Mineral oils, other fluids on request

Options and Accessories


Valve (not available for SFZ)

- Bypass valve: Allows unfiltered oil to bypass the contaminated element once the opening pressure has been reached, a differential pressure of $6^{+0.5}$ bar / $87^{+7.25}$ PSI Δp is the standard setting. Other settings available upon request.
- Reverse flow valve: Allows reverse flow through the filter head without backflushing the element.
- Non-return valve: Prevents draining of the delivery line during element change.
- Multi-function valve: Opening pressure $6^{+0.5}$ bar / $87^{+7.25}$ PSI
Bypass, reverse flow capability and non-return valve combined in one valve.

Clogging Indicator

- Standard actuating pressure: $5^{-0.5}$ bar / $72.5^{-7.25}$ PSI Δp
Other actuating pressure settings are available upon request.
- Available indicators: Visual
Electrical
Visual-electrical (24 V DC, 110 V AC, 230 V AC versions)

High Pressure Filters ■ Type SF

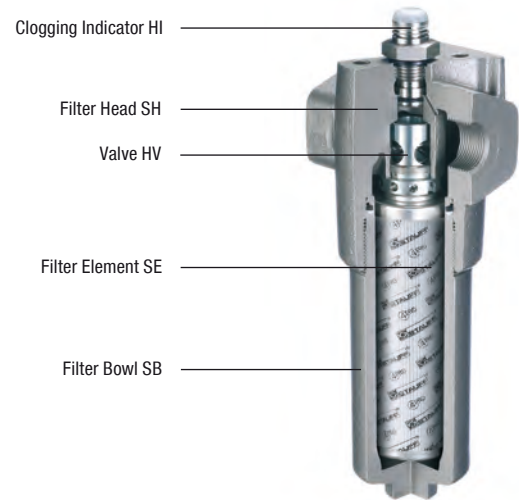

Product Description

STAUFF SF series High Pressure Filters are designed for in-line hydraulic applications, with a maximum operating pressure of 420 bar / 6000 PSI. Used together with STAUFF SE series Filter Elements, a high efficiency of contaminant removal is assured. The high dirt-hold capacity of the elements ensures long service life and, as a result, reduced maintenance costs.

Technical Data

Construction

- Designed for in-line assembly, with threaded mounting holes on top of the head.

Materials

- Filter head: Spheroidal Graphite Cast Iron
- Filter bowl: Cold Drawn Steel
- O-rings: NBR (Buna-N®)
FPM (Viton®)
EPDM (Ethylene-Propylene-Diene-Monomer-Rubber)
- Support ring: PTFE (Polytetrafluoroethylene)

Port Connections

- BSP
- NPT
- SAE O-ring thread
- SAE Code 61 flange
- SAE Code 62 flange

Other port connections available on request.

Operating Pressure

- Max. 420 bar / 6000 PSI

Burst Pressure

- Min. 1260 bar / 18275 PSI

Temperature Range

- 10 °C ... +100 °C / +14 °F ... +212 °F

Filter Elements

- Specifications see page C22 / C41

Media Compatibility

- Mineral oils, other fluids on request

Options and Accessories


Valve

- Bypass valve: Allows unfiltered oil to bypass the contaminated element once the opening pressure has been reached, a differential pressure of $6^{+0.5}$ bar / $87^{+7.25}$ PSI Δp is the standard setting. Other settings available upon request.
- Reverse flow valve: Allows reverse flow through the filter head without backflushing the element.
- Non-return valve: Prevents draining of the delivery line during element change.
- Multi-function valve: Opening pressure $6^{+0.5}$ bar / $87^{+7.25}$ PSI
Bypass, reverse flow capability and non-return valve combined in one valve.


Clogging Indicator

- Standard actuating pressure: $5_{-0.5}^{+0.5}$ bar / $72.5_{-7.25}^{+7.25}$ PSI Δp
Other actuating pressure settings are available upon request.
- Available indicators: Visual
Electrical
Visual-electrical (24 V DC, 110 V AC, 230 V AC versions)


High Pressure Filters ■ Type SF

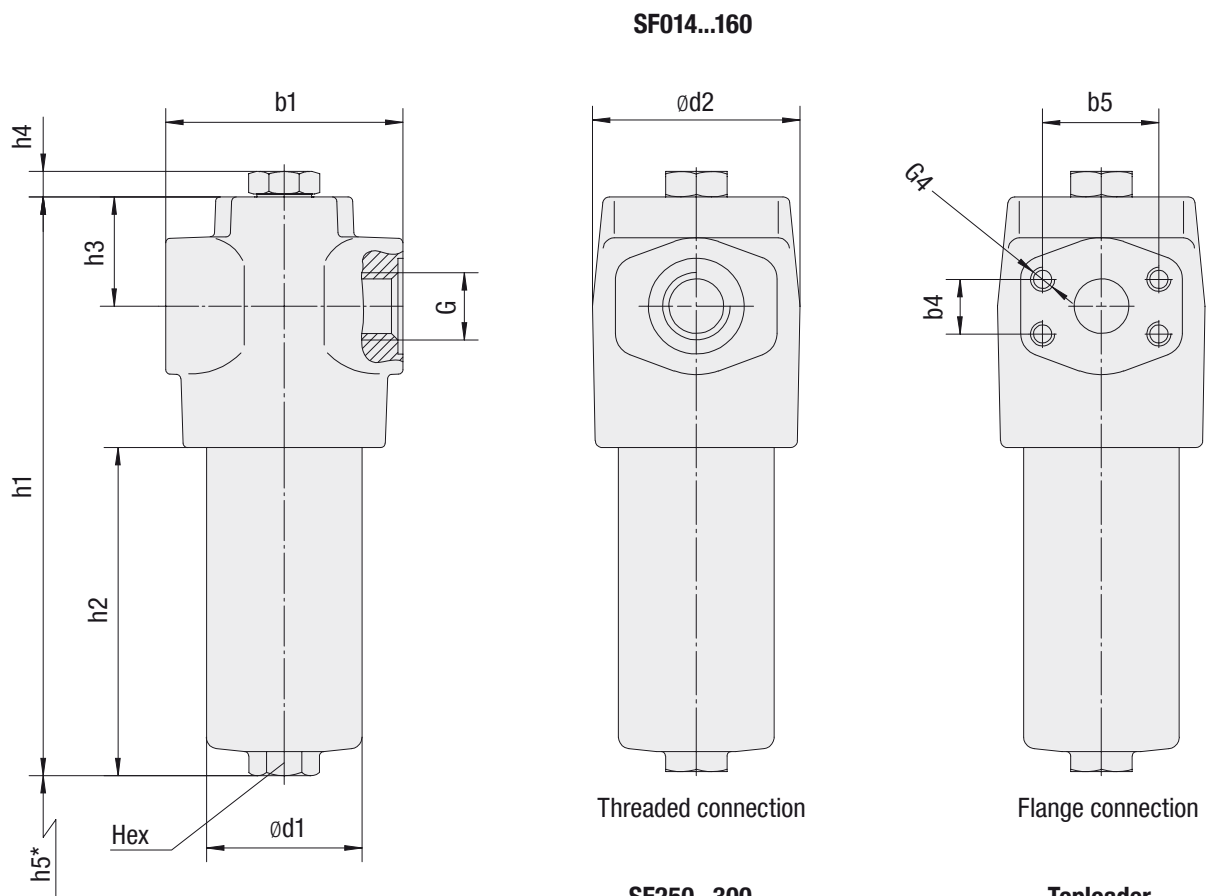

G2: for BSP threads,
GM / FM / F1M flange
G3: for NPT, SAE O-ring thread,
GU / FU / F1U flange

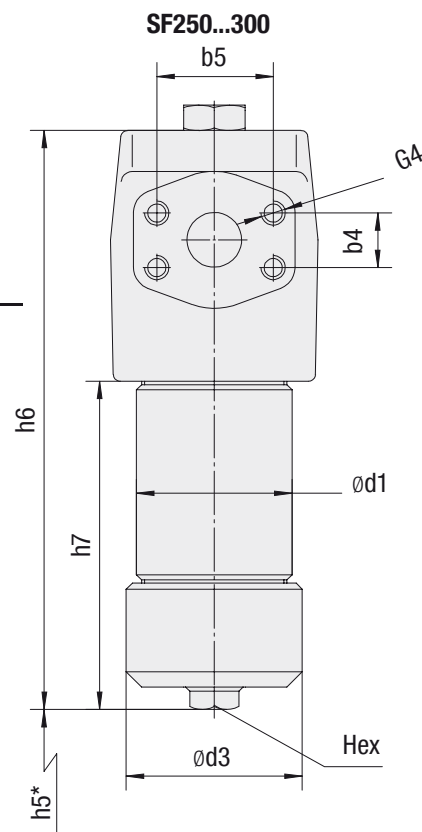

**Toploader
SF014...300..TL**

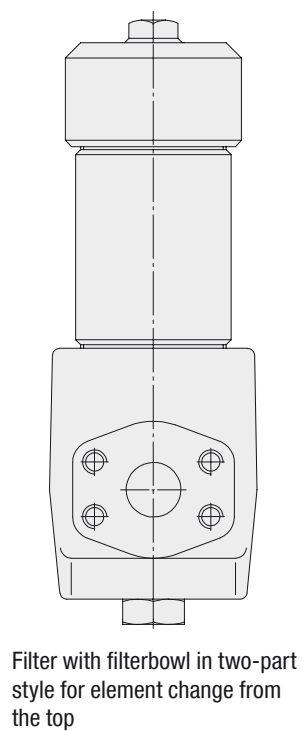

* recommended space for element change

High Pressure Filters ■ Type SF

Thread Connection G	Filter Size SF								
	014	030	045	070	125	090	160	250	300
BSP	3/4	3/4	1-1/4	1-1/4	1-1/4	1-1/2	1-1/2	1-1/2	1-1/2
NPT	3/4	3/4	1-1/4	1-1/4	1-1/4	1-1/2	1-1/2	1-1/2	1-1/2
SAE O-ring Thread	1-1/16-12	1-1/16-12	1-5/8-12	1-5/8-12	1-5/8-12	1-7/8-12	1-7/8-12	1-7/8-12	1-7/8-12
SAE Flange 3000 PSI	3/4	3/4	1-1/4	1-1/4	1-1/4	1-1/2	1-1/2	1-1/2	1-1/2
SAE Flange 6000 PSI	3/4	3/4	1-1/4	1-1/4	1-1/4	1-1/2	1-1/2	1-1/2	1-1/2
Weight (kg/lbs) incl. Elements with Filter Bowl in One-Part Style	5,3	6,2	10,3	12	16,3	27	35,5	-	-
	11.7	13.7	22.7	26.5	35.9	59.9	78.3	-	-
Weight (kg/lbs) incl. Elements with Filter Bowl in Two-Part Style	5,9	6,9	12,2	13,7	20	32	39,3	49	57,3
	13	15.2	26.9	30.2	44.1	70.5	86.5	108	126.3

Dimensions (mm/in)		Filter Size SF								
		014	030	045	070	125	090	160	250	300
b1		104	104	128	128	128	178	178	178	178
		4.10	4.10	5.04	5.04	5.04	7.01	7.01	7.01	7.01
d2		91	91	116	116	116	159	159	159	159
		3.58	3.58	4.57	4.57	4.57	6.26	6.26	6.26	6.26
h3		48	48	49,5	49,5	49,5	72	72	72	72
		1.89	1.89	1.95	1.95	1.95	2.84	2.84	2.84	2.84
h4		12,5	12,5	12,5	12,5	12,5	12,5	12,5	12,5	12,5
		.49	.49	.49	.49	.49	.49	.49	.49	.49
with Filter Bowl in One-Part Style Type SF	d1	68	68	95	95	95	130	130	130	130
		2.68	2.68	3.74	3.74	3.74	5.12	5.12	5.12	5.12
	h1	188	254	239	298	483	323	494	-	-
		7.40	10.00	9.41	11.73	19.11	12.72	19.45	-	-
	h2	78	144	103	161	343	148	319	-	-
		3.07	5.67	4.06	6.34	13.5	5.83	12.56	-	-
	h5	100	170	140	200	380	190	360	-	-
		3.94	6.69	5.51	7.87	14.96	7.48	14.17	-	-
		85	85	120	120	120	150	150	-	-
		3.35	3.35	4.72	4.72	4.72	5.91	5.91	-	-
	Hex	27	27	32	32	32	36	36	36	36
		1.06	1.06	1.26	1.26	1.26	1.42	1.42	1.42	1.42
with Filter Bowl in Two-Part Style Type SF...TL	d1	70	70	101,6	101,6	101,6	133	133	133	133
		2.76	2.76	4	4	4	5.24	5.24	5.24	5.24
	d3	84	84	115	115	115	155	155	155	155
		3.31	3.31	4.53	4.53	4.53	6.10	6.10	6.10	6.10
	h5	65	130	100	160	340	120	290	425	590
		2.56	5.12	3.94	6.30	13.39	4.72	11.42	16.73	23.23
	h6	190	256	241	300	485	329,5	500,5	656,5	821,5
		7.48	10.08	9.49	11.81	19.10	12.97	19.71	25.85	32.34
	h7	80	146	103	163	344	154,5	325,5	481,5	646,5
		3.15	5.75	4.06	6.42	13.54	6.08	12.82	18.96	25.45
Dimensions SAE Flange 3000 PSI	Hex	27	27	32	32	32	36	36	36	36
		1.06	1.06	1.26	1.26	1.26	1.42	1.42	1.42	1.42
	b4	22,2	22,2	30,2	30,2	30,2	35,7	35,7	35,7	35,7
		.87	.87	1.87	1.87	1.87	1.41	1.41	1.41	1.41
	b5	47,6	47,6	58,7	58,7	58,7	70	70	70	70
		1.19	1.19	2.32	2.32	2.32	2.76	2.76	2.76	2.76
Dimensions SAE Flange 6000 PSI	G4	M10 x 15	M10 x 15	M14 x 20	M12 x 20					
		3/8-16 UNC	3/8-16 UNC	7/16-14 UNC	1/2-13 UNC					
	b4	23,8	23,8	31,6	31,6	31,6	36,7	36,7	36,7	36,7
		.94	.94	1.24	1.24	1.24	1.45	1.45	1.45	1.45
	b5	50,8	50,8	66,7	66,7	66,7	79,4	79,4	79,4	79,4
		2.00	2.00	2.63	2.63	2.63	3.13	3.13	3.13	3.13
	G4	M10 x 15	M14 x 17			M16 x 20				
		3/8-16 UNC	1/2-13 UNC			5/8-11 UNC				

Reference: rec.*: Recommended | min.*: Minimum

Dimensions (mm/in)		Filter Size SF								
		014	030	045	070	125	090	160	250	300
T	b2	23,8	23,8	31,6	31,6	31,6	36,7	36,7	36,7	36,7
		.94	.94	1.24	1.24	1.24	1.45	1.45	1.45	1.45
	b3	50,8	50,8	66,7	66,7	66,7	79,4	79,4	79,4	79,4
		2.00	2.00	2.63	2.63	2.63	3.13	3.13	3.13	3.13
	G2	M10 x 15			M14 x 20			M16 x 20		
TH (optional)	G3	3/8-16 UNC x .59			1/2-13 UNC x .79			5/8-11 UNC x .79		
	b2	32	32	35	35	35	60	60	60	60
		1.26	1.26	1.38	1.38	1.38	2.36	2.36	2.36	2.36
	b3	56	56	85	85	85	115	115	115	115
		2.20	2.20	3.35	3.35	3.35	4.53	4.53	4.53	4.53
	G2	M6 x 9			M10 x 15			M12 x 20		
	G3	1/2-28 UNF x .35			3/8-24 UNF x .59			1/2-20 UNF x .79		

High Pressure Filter Housings / Complete Filters ■ Type SF

SF **014** ... **B** / **T** **B** / **B** / **P** **T** **230** / **TL** / **X**

1 2 3 4 5 6 7 8 9 10 11 12 13

1 Type

High Pressure Filter **SF**

2 Group

Flow	Size
60 l/min / 14 US GPM	014
110 l/min / 30 US GPM	030
160 l/min / 45 US GPM	045
240 l/min / 70 US GPM	070
330 l/min / 90 US GPM	090
475 l/min / 125 US GPM	125
660 l/min / 160 US GPM	160
990 l/min / 250 US GPM	250
1135 l/min / 300 US GPM	300

Note: Exact flow will depend on filter element selected.
Consult technical data on pages C43 / C44.

3 Filter Material

Material	max. Δp*collapse	Micron ratings available	Code
Without filter element	-	-	...
Inorg. glass fibre	25 bar / 363 PSI	3, 5, 10, 20	G
Inorg. glass fibre	210 bar / 3045 PSI		H
Stainless fibre	210 bar / 3045 PSI		A
Stainless mesh	30 bar / 435 PSI	25, 50, 100, 200	B, S

Note: * Collapse/burst resistance as per ISO 2941.
Bold types identify preferred materials, other materials on request.

4 Micron Rating

3 μm	03
5 μm	05
10 μm	10
20 μm	20
25 μm	25
50 μm	50
100 μm	100
200 μm	200

Note: Other micron ratings on request.

5 Sealing Material

NBR (Buna-N®)	B
FPM (Viton®)	V
EPDM	E

Note: Other sealing materials on request.

6 Connecting Flange

Type T	T
Type TH (optional)	TH

7 Connection Style

Connection Style	Group									Thread Style	Code
	014	030	045	070	125	090	160	250	300		
BSP	3/4		1-1/4			1-1/2				metric	B
BSP	1		1-1/2			-				metric	B1
NPT	3/4		1-1/4			1-1/2				UNC	N
SAE O-ring Thread	1-1/16-12		1-5/8-12			1-7/8-12				UNC	U
SAE Flange 6000 PSI	3/4		1-1/4			1-1/2				metric	GM
SAE Flange 6000 PSI	3/4		1-1/4			1-1/2				UNC	GU
SAE Flange 3000 PSI	3/4		1-1/4			1-1/2				metric	FM
SAE Flange 3000 PSI	3/4		1-1/4			1-1/2				UNC	FU
SAE Flange 3000 PSI	1		-			2				metric	F1M
SAE Flange 3000 PSI	1		-			2				UNC	F1U

Note: Other port connections on request. Bold types identify preferred connection styles.

8 Valve

Without valve	0
Bypass valve	B
Reverse flow valve	R
Non-return valve	N
Multi-function valve	M

9 Clogging Indicator

Without clogging indicator	0
Visual, with automatic reset	A
Visual, with manual reset	V
Electrical	E
Electrical, Deutsch plug	ED
Visual-electrical	P

10 Thermostop

Without thermostop	none
With thermostop	T

11 Voltage (only for Code P)

24 V DC	024
110 V AC	110
230 V AC	230

12 Style Filter Bowl

With bowl in one-part style	none
Toploader, with bowl in two-part style	TL

Note: Group size SF250 and SF300 only available in TL-version.
With drain plug available on request.

13 Design Code

Only for information	X
----------------------	----------

Filter Elements ■ Type SE

SE - **014** **G** **10** **B** / **X**

1 2 3 4 5 6

1 Type

Filter Element Series **SE**

2 Group

According to filter housing

3 Filter Material

Material	max. Δp*collapse	Micron ratings available	Code
Inorganic glass fibre	25 bar / 363 PSI	3, 5, 10, 20	G
Inorganic glass fibre	210 bar / 3045 PSI		H
Stainless fibre	210 bar / 3045 PSI		A
Stainless mesh	30 bar / 435 PSI	25, 50, 100, 200	B, S

Note: * Collapse/burst resistance as per ISO 2941. Bold types identify preferred materials, other materials on request.

4 Micron Rating

3 μm	03
5 μm	05
10 μm	10
20 μm	20
25 μm	25
50 μm	50
100 μm	100
200 μm	200

Note: Other micron ratings on request.

5 Sealing Material

NBR (Buna-N®)	B
FPM (Viton®)	V
EPDM	E

Note: Other sealing materials on request.

6 Design Code

Only for information	X
----------------------	----------

High Pressure Filters ■ Type SF-TM



Product Description

STAUFF SF-TM series High Pressure Filters are designed for manifold block mounting hydraulic applications, with a maximum operating pressure of 315 bar / 4560 PSI. Used together with STAUFF SE series Filter Elements, a high efficiency of contaminant removal is assured. The high dirt-hold capacity of the elements ensures long service life and, as a result, reduced maintenance costs.

Technical Data

Construction

- Designed for manifold mounting, with mounting holes and fluid ports on top of the head.

Materials

- Filter head: SF-TM-014-070 Free Cutting Steel
- Filter bowl: SF-TM-090-300 Spheroidal Graphite Cast Iron
- Filter bowl: Cold Drawn Steel
- O-rings: NBR (Buna-N®)
- O-rings: FPM (Viton®)
- O-rings: EPDM (Ethylene-Propylene-Diene-Monomer-Rubber)
- Support ring: PTFE (Polytetrafluoroethylene)

Operating Pressure

- Max. 315 bar / 4560 PSI

Burst Pressure

- Min. 945 bar / 13705 PSI

Temperature Range

- -10 °C ... +100 °C / +14 °F ... +212 °F

Filter Elements

- Specifications see page C26 / C41

Media Compatibility

- Mineral oils, other fluids on request

Options and Accessories


Valve

- Bypass valve: Allows unfiltered oil to bypass the contaminated element once the opening pressure has been reached, a differential pressure of $6^{+0.5}$ bar / $87^{+7.25}$ PSI Δp is the standard setting. Other settings available upon request.
- Reverse flow valve: Allows reverse flow through the filter head without backflushing the element.
- Non-return valve: Prevents draining of the delivery line during element change.
- Multi-function valve: Opening pressure $6^{+0.5}$ bar / $87^{+7.25}$ PSI
Bypass, reverse flow capability and non-return valve combined in one valve.

Clogging Indicator

- Standard actuating pressure: $5^{-0.5}$ bar / $72.5^{-7.25}$ PSI Δp
Other actuating pressure settings are available upon request.
- Available indicators: Visual
Electrical
Visual-electrical (24 V DC, 110 V AC, 230 V AC versions)

High Pressure Filters ■ Type SF-TM

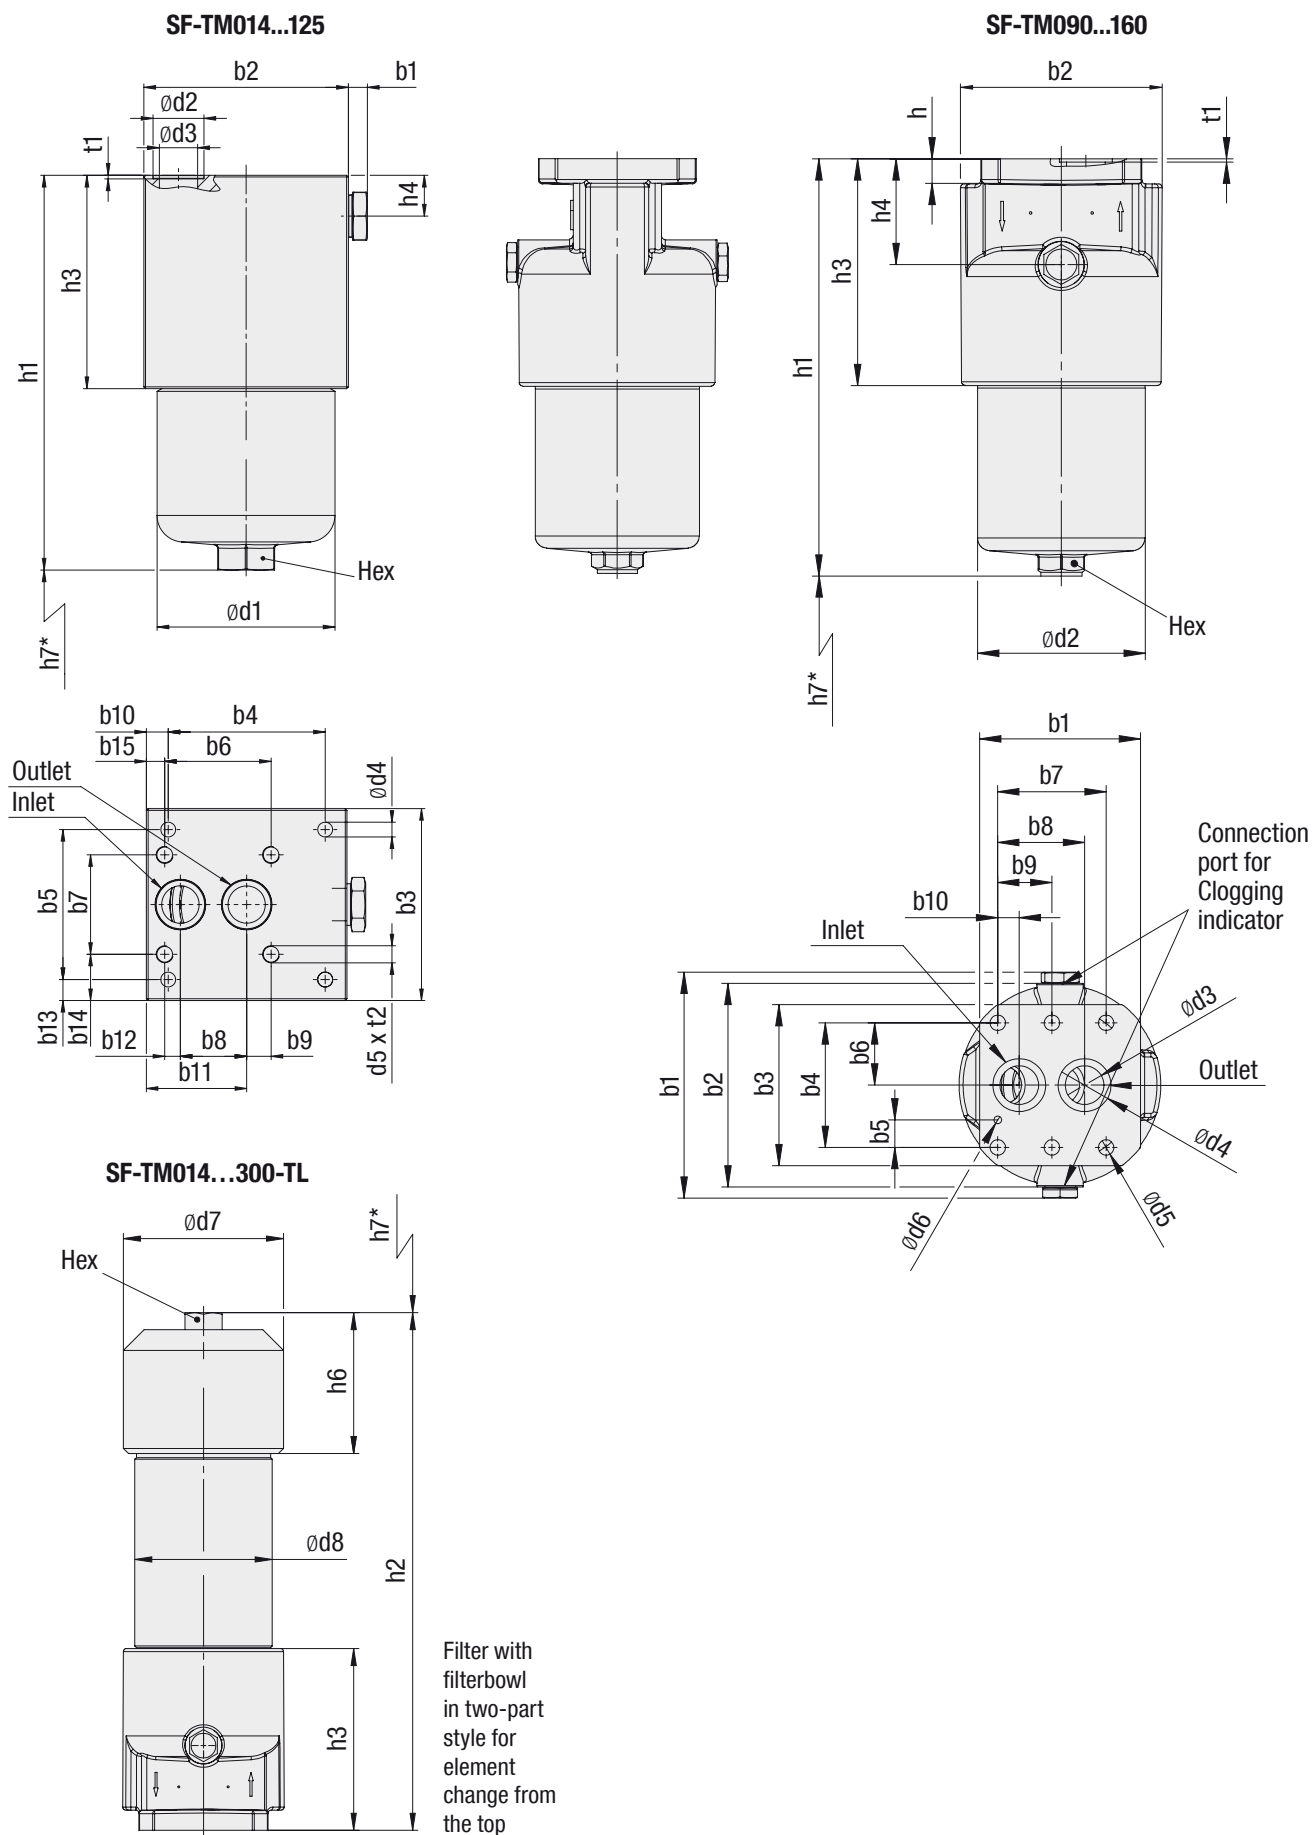

* recommended space for element change

High Pressure Filters ■ Type SF-TM

Dimensions (mm/in)			Filter Size SF - TM								
			014	030	045	070	125	090	160	250	300
b1			6	6	6	6	6	175,6	175,6	175,6	175,6
			.24	.24	.24	.24	.24	6.91	6.91	6.91	6.91
b2			104	104	115	115	115	158	158	158	158
			4.09	4.09	4.53	4.53	4.53	6.22	6.22	6.22	6.22
b3			80	80	110	110	110	125	125	125	125
			3.35	3.35	4.33	4.33	4.33	4.92	4.92	4.92	4.92
b4			89	89	90	90	90	96,8	96,8	96,8	96,8
			3.50	3.50	3.54	3.54	3.54	3.81	3.81	3.81	3.81
b5			31,8	31,8	86	86	86	21,4	21,4	21,4	21,4
			1.25	1.25	3.39	3.39	3.39	.84	.84	.84	.84
b6			-	-	61	61	61	48,4	48,4	48,4	48,4
			-	-	2.40	2.40	2.40	1.91	1.91	1.91	1.91
b7			-	-	57	57	57	84,1	84,1	84,1	84,1
			-	-	2.24	2.24	2.24	3.31	3.31	3.31	3.31
b8			31,6	31,6	38	38	38	67,4	67,4	67,4	67,4
			1.24	1.24	1.50	1.50	1.50	2.65	2.65	2.65	2.65
b9			-	-	14	14	14	42,05	42,05	42,05	42,05
			-	-	.55	.55	.55	1.66	1.66	1.66	1.66
b10			7,5	7,5	12,5	12,5	12,5	16,7	16,7	16,7	16,7
			.30	.30	.49	.49	.49	.66	.66	.66	.66
b11			55,9	55,9	57,5	57,5	57,5	-	-	-	-
			2.20	2.20	2.26	2.26	2.26	-	-	-	-
b12			-	-	9	9	9	-	-	-	-
			-	-	.35	.35	.35	-	-	-	-
b13			24,1	24,1	12	12	12	-	-	-	-
			.95	.95	.47	.47	.47	-	-	-	-
b14			-	-	26,5	26,5	26,5	-	-	-	-
			-	-	1.04	1.04	1.04	-	-	-	-
b15			-	-	10,5	10,5	10,5	-	-	-	-
			-	-	.41	.41	.41	-	-	-	-
d1			68,2	68,2	95,2	95,2	95,2	156	156	156	156
			2.69	2.69	3.75	3.75	3.75	6.14	6.14	6.14	6.14
d2			25,3	25,3	28,6	28,6	28,6	130,2	130,2	130,2	130,2
			1.00	1.00	1.13	1.13	1.13	5.13	5.13	5.13	5.13
d3			17,5	17,5	21,4	21,4	21,4	30	30	30	30
			.69	.69	.84	.84	.84	1.18	1.18	1.18	1.18
d4			8,5	8,5	9	9	9	41	41	41	41
			.33	.33	.35	.35	.35	1.61	1.61	1.61	1.61
d5			-	-	7/16-14 UNC	7/16-14 UNC	7/16-14 UNC	12	12	12	12
			-	-				.47	.47	.47	.47
d6			-	-	-	-	-	6	6	6	6
			-	-	-	-	-	.24	.24	.24	.24
d7			84	84	115	115	115	155	155	155	155
			3.31	3.31	4.53	4.53	4.53	6.10	6.10	6.10	6.10
d8			70	70	101,6	101,6	101,6	133	133	133	133
			2.76	2.76	4.00	4.00	4.00	5.24	5.24	5.24	5.24
h1			162	228	206	264	446	324	495	-	-
			6.38	8.97	8.11	10.39	17.56	12.76	19.49	-	-
h2			164	230	206	266	447	330,5	501,5	657,5	822,5
			6.46	9.06	8.11	10.47	17.60	13.01	19.74	25.89	32.38
h3			76	76	93	93	93	178	178	178	178
			2.99	2.99	3.66	3.66	3.66	7.01	7.01	7.01	7.01
h4			25	25	25	25	25	82	82	82	82
			.98	.98	.98	.98	.98	3.23	3.23	3.23	3.23
h5			-	-	-	-	-	19,1	19,1	19,1	19,1
			-	-	-	-	-	.75	.75	.75	.75
h6			64	64	82,5	82,5	82,5	136	136	136	136
			2.52	2.52	3.25	3.25	3.25	5.35	5.35	5.35	5.35
h7	One-Part Style	rec.*	100	170	140	200	380	190	360	-	-
			3.94	6.69	5.51	7.87	14.96	7.48	14.17	-	-
		min.*	85	85	120	120	120	150	150	-	-
			3.35	3.35	4.72	4.72	4.72	5.91	5.91	-	-
	Two-Part Style		65	130	100	160	340	120	290	425	590
			2.56	5.12	3.94	6.30	13.39	4.72	11.42	16.73	23.23
t1			2	2	2	2	2	3	3	3	3
			.08	.08	.08	.08	.08	.12	.12	.12	.12
t2			-	-	13	13	13	-	-	-	-
			-	-	.51	.51	.51	-	-	-	-
Hex			27	27	32	32	32	36	36	36	36
			1.06	1.06	1.26	1.26	1.26	1.42	1.42	1.42	1.42
Weight (kg/lbs)	One-Part Style		5,7	6,3	11	12,5	17	21,6	28,8	-	-
			12.5	13.9	24.2	27.8	37.8	48.0	64.0	-	-
	Two-Part Style		6,6	7,3	13,1	14,6	21	26,5	33,8	43,2	54,6
					14.7	16.2	29.1	32.4	46.7	58.9	75.1

Reference: rec.*: Recommended | min.*: Minimum

High Pressure Filter Housings / Complete Filters ■ Type SF-TM

SF-TM 014 ... B / B / B / P T 230 / TL / X
1 2 3 4 5 6 7 8 9 10 11 12
1 TypeHigh Pressure Filter Top Mounted **SF-TM****2 Group**

Flow	Size
60 l/min / 14 US GPM	014
110 l/min / 30 US GPM	030
160 l/min / 45 US GPM	045
240 l/min / 70 US GPM	070
330 l/min / 90 US GPM	090
475 l/min / 125 US GPM	125
660 l/min / 160 US GPM	160
990 l/min / 250 US GPM	250
1135 l/min / 300 US GPM	300

Note: Exact flow will depend on filter element selected.
Consult technical data on pages C43 / C44.

3 Filter Material

Material	max. Δp*collapse	Micron ratings available	Code
Without filter element	-	-	...
Inorg. glass fibre	25 bar / 363 PSI	3, 5, 10, 20	G
Inorg. glass fibre	210 bar / 3045 PSI		H
Stainless fibre	210 bar / 3045 PSI		A
Stainless mesh	30 bar / 435 PSI	25, 50, 100, 200	B, S

Note: * Collapse/burst resistance as per ISO 2941.
Bold types identify preferred materials, other materials on request.

4 Micron Rating

3 µm	03
5 µm	05
10 µm	10
20 µm	20
25 µm	25
50 µm	50
100 µm	100
200 µm	200

Note: Other micron ratings on request.

5 Sealing Material

NBR (Buna-N®)	B
FPM (Viton®)	V
EPDM	E

Note: Other sealing materials on request.

6 Connection Size

Connection Size	Group								Code
	014	030	045	070	125	090	160	250	300
BSP	1/2 (Ø17,5mm / Ø.69in)		1-1/4 (Ø21,4mm / Ø.85in)			1-1/2 (Ø30mm / Ø1.18in)			B

7 Valve

Without valve	O
Bypass valve	B
Reverse flow valve	R
Non-return valve	N
Multi-function valve	M

8 Clogging Indicator

Without clogging indicator	O
Visual, with automatic reset	A
Visual, with manual reset	V
Electrical	E
Electrical, Deutsch plug	ED
Visual-electrical	P

9 Thermostop

Without thermostop	none
With thermostop	T

10 Voltage (only for Code P)

24 V DC	024
110 V AC	110
230 V AC	230

11 Style Filter Bowl

With bowl in one-part style	none
Toploader, with bowl in two-part style	TL

Note: Group size SF-TM-250 and SF-TM-300 only available in TL-version.

12 Design Code

Only for information	X
----------------------	----------

Filter Elements ■ Type SE

SE - 014 G 10 B / X
1 2 3 4 5 6
1 TypeFilter Element Series **SE****2 Group**

According to filter housing

3 Filter Material

Material	max. Δp*collapse	Micron ratings available	Code
Inorganic glass fibre	25 bar / 363 PSI	3, 5, 10, 20	G
Inorganic glass fibre	210 bar / 3045 PSI		H
Stainless fibre	210 bar / 3045 PSI		A
Stainless mesh	30 bar / 435 PSI	25, 50, 100, 200	B, S

Note: * Collapse/burst resistance as per ISO 2941. Bold types identify preferred materials, other materials on request.

4 Micron Rating

3 µm	03
5 µm	05
10 µm	10
20 µm	20
25 µm	25
50 µm	50
100 µm	100
200 µm	200

Note: Other micron ratings on request.

5 Sealing Material

NBR (Buna-N®)	B
FPM (Viton®)	V
EPDM	E

Note: Other sealing materials on request.

6 Design Code

Only for information	X
----------------------	----------

High Pressure Filters ■ Type SF-SM



Product Description

STAUFF SF-SM series High Pressure Filters are designed for manifold block mounting hydraulic applications, with a maximum operating pressure of 315 bar / 4560 PSI. Used together with STAUFF SE series Filter Elements, a high efficiency of contaminant removal is assured. The high dirt-hold capacity of the elements ensures long service life and, as a result, reduced maintenance costs.

Technical Data

Construction

- Designed for manifold mounting, with mounting holes and fluid ports on side of the head.

Materials

- Filter head: Spheroidal Graphite Cast Iron
- Filter bowl: Cold Drawn Steel
- O-rings: NBR (Buna-N®)
FPM (Viton®)
EPDM (Ethylene-Propylene-Diene-Monomer-Rubber)
- Support ring: PTFE (Polytetrafluoroethylene)

Operating Pressure

- Max. 315 bar / 4560 PSI

Burst Pressure

- Min. 945 bar / 13705 PSI

Temperature Range

- -10 °C ... +100 °C / +14 °F ... +212 °F

Filter Elements

- Specifications see page C30 / C41

Media Compatibility

- Mineral oils, other fluids on request

Options and Accessories

Valve


- Bypass valve: Allows unfiltered oil to bypass the contaminated element once the opening pressure has been reached, a differential pressure of $6^{+0.5}$ bar / $87^{+7.25}$ PSI Δp is the standard setting. Other settings available upon request.
- Reverse flow valve: Allows reverse flow through the filter head without backflushing the element.
- Non-return valve: Prevents draining of the delivery line during element change.
- Multi-function valve: Opening pressure $6^{+0.5}$ bar / $87^{+7.25}$ PSI
Bypass, reverse flow capability and non-return valve combined in one valve.

Clogging Indicator


- Standard actuating pressure: $5_{-0.5}^{+0.5}$ bar / $72.5_{-7.25}^{+7.25}$ PSI Δp
Other actuating pressure settings are available upon request.
- Available indicators: Visual
Electrical
Visual-electrical (24 V DC, 110 V AC, 230 V AC versions)

High Pressure Filters ■ Type SF-SM


SF-SM014...125

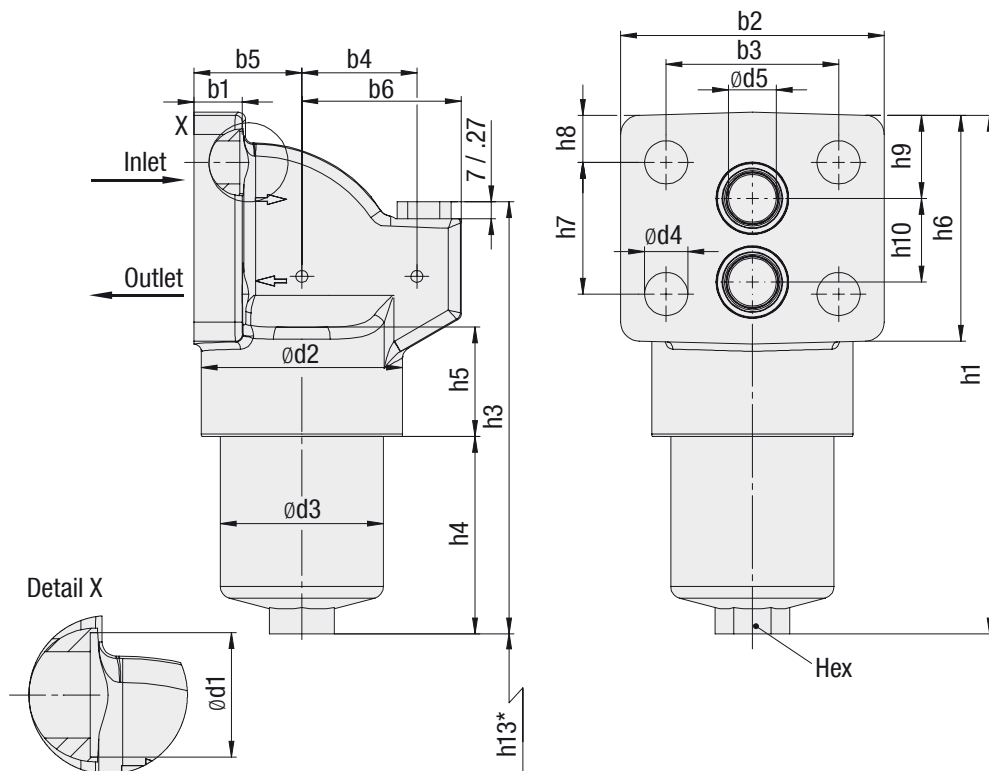

SF-SM090...160

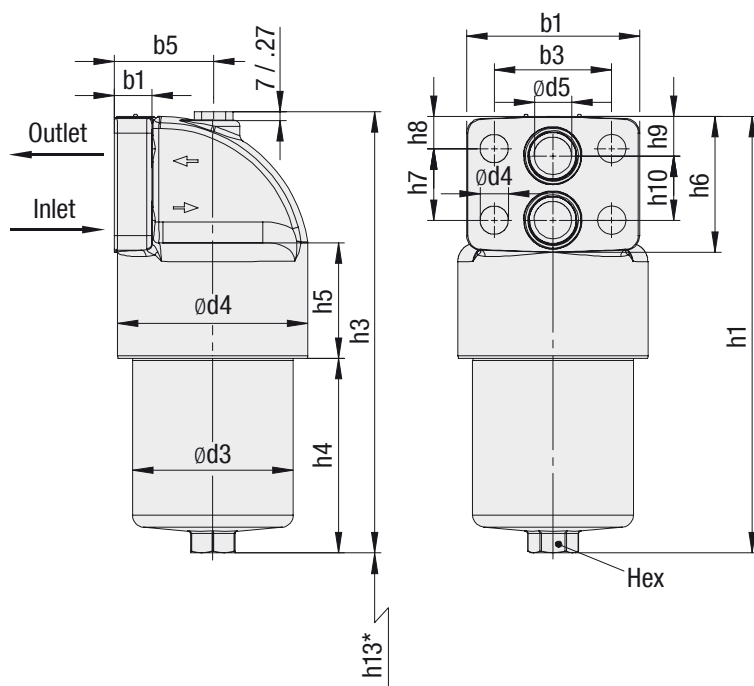

SF-SM014...300-TL

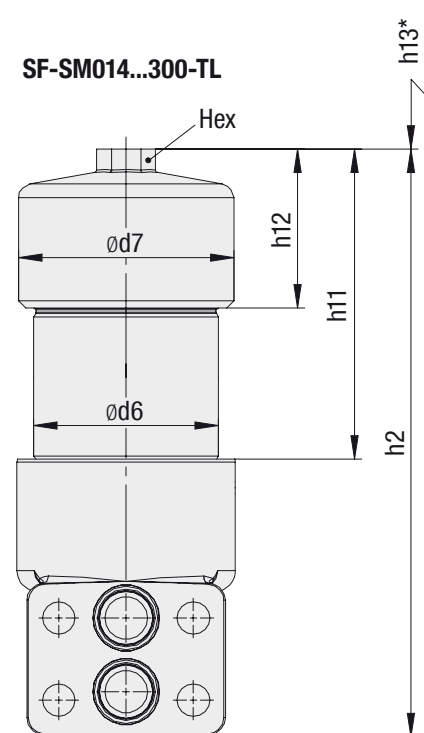

Filter with filterbowl in two-part style for element change from the top

* recommended space for element change

High Pressure Filters ■ Type SF-SM

Dimensions (mm/in)			Filter Size SF - SM											
			014	030	045	045 OAI	070	070 OAI	125	125 OAI	090	160	250	300
b1			20	20	30	30	30	30	30	30	30	30	30	
			.79	.79	1.18	1.18	1.18	1.18	1.18	1.18	1.18	1.18	1.18	
b2			110	110	140	140	140	140	140	140	140	140	140	
			4.33	4.33	5.51	5.51	5.51	5.51	5.51	5.51	5.51	5.51	5.51	
b3			72	72	95	95	95	95	95	95	95	95	95	
			2.83	2.83	3.74	3.74	3.74	3.74	3.74	3.74	3.74	3.74	3.74	
b4			66	66	89	89	89	89	89	-	-	-	-	
			2.60	2.60	3.50	3.50	3.50	3.50	3.50	-	-	-	-	
b5			45	45	59	59	59	59	59	79,5	79,5	79,5	79,5	
			1.77	1.77	2.32	2.32	2.32	2.32	2.32	3.13	3.13	3.13	3.13	
b6			48	48	69	69	69	69	69	-	-	-	-	
			1.89	1.89	2.72	2.72	2.72	2.72	2.72	-	-	-	-	
d1			26	26	32	32	32	32	32	32	32	32	32	
			1.02	1.02	1.26	1.26	1.26	1.26	1.26	1.26	1.26	1.26	1.26	
d2			84	84	116	116	116	116	116	154	154	154	154	
			3.31	3.31	4.57	4.57	4.57	4.57	4.57	6.06	6.06	6.06	6.06	
d3			68	68	95	95	95	95	95	130	130	130	130	
			2.68	2.68	3.74	3.74	3.74	3.74	3.74	5.12	5.12	5.12	5.12	
d4			18	18	22	22	22	22	22	23	23	23	23	
			.71	.71	.87	.87	.87	.87	.87	.91	.91	.91	.91	
d5			20	20	32	32	32	32	32	30	30	30	30	
			.79	.79	1.26	1.26	1.26	1.26	1.26	1.18	1.18	1.18	1.18	
d6			70	70	101,5	101,5	101,5	101,5	101,5	133	133	133	133	
			2.76	2.76	4.00	4.00	4.00	4.00	4.00	5.24	5.24	5.24	5.24	
d7			84	84	115	115	115	115	115	155	155	155	155	
			3.31	3.31	4.53	4.53	4.53	4.53	4.53	6.10	6.10	6.10	6.10	
h1			217	284	280	284	340	344	506	508	353	523	673	839
			8.54	11.18	11.02	11.18	13.39	13.54	19.92	20.00	13.90	20.59	26.50	33.03
h2			219	286	282	286	342	346	507	507	355	525	675	841
			8.62	11.26	11.10	11.26	13.46	13.62	19.96	19.96	13.98	20.67	26.57	33.11
h3			181	248	222	239	282	299	464	481	357	527	677	843
			7.13	9.76	8.74	9.41	11.10	11.77	18.27	18.94	14.06	20.75	26.65	33.19
h4			83	150	117	119	177	179	343	345	157	329	477	643
			3.27	5.91	4.61	4.69	6.97	7.05	13.50	13.58	6.18	12.95	18.78	25.31
h5			45,5	45,5	61	61	61	61	61	94	94	94	94	
			1.79	1.79	2.40	2.40	2.40	2.40	2.40	3.70	3.70	3.70	3.70	
h6			94	94	110	110	110	110	110	110	110	110	110	
			3.70	3.70	4.33	4.33	4.33	4.33	4.33	4.33	4.33	4.33	4.33	
h7			55	55	60	60	60	60	60	58	58	58	58	
			2.17	2.17	2.36	2.36	2.36	2.36	2.36	2.28	2.28	2.28	2.28	
h8			19,5	19,5	25	25	25	25	25	26	26	26	26	
			.77	.77	.98	.98	.98	.98	.98	1.02	1.02	1.02	1.02	
h9			34,5	34,5	31	31	31	31	31	32	32	32	32	
			1.36	1.36	1.22	1.22	1.22	1.22	1.22	1.26	1.26	1.26	1.26	
h10			35	35	52	52	52	52	52	52	52	52	52	
			1.38	1.38	2.05	2.05	2.05	2.05	2.05	2.05	2.05	2.05	2.05	
h11			80	146	103	103	163	163	344	344	154,5	325,5	481,5	646,5
			3.15	5.75	4.06	4.06	6.42	6.42	13.64	13.64	6.08	12.81	18.96	25.45
h12			64	64	82,5	82,5	82,5	82,5	82,5	136	136	136	136	
			2.52	2.52	3.25	3.25	3.25	3.25	3.25	5.35	5.35	5.35	5.35	
h13	One-Part Style	rec.*	100	170	140	140	200	200	380	380	190	360	-	-
			3.94	6.69	5.51	5.51	7.87	7.87	14.96	14.96	7.48	14.17	-	-
		min.*	85	85	120	120	120	120	120	120	150	150	-	-
	Two-Part Style		3.35	3.35	4.72	4.72	4.72	4.72	4.72	4.72	5.91	5.91	-	-
			65	130	100	100	160	160	340	340	120	290	425	590
			2.56	5.12	3.94	3.94	6.30	6.30	13.39	13.39	4.72	11.42	16.73	23.23
O-ring			24 x 3	24 x 3	40 x 3,5	40 x 3,5	40 x 3,5	40 x 3,5	40 x 3,5	40 x 3,5	40 x 3,5	40 x 3,5	40 x 3,5	40 x 3,5
			.95 x .14	.95 x .14	1.57 x .14	1.57 x .14	1.57 x .14	1.57 x .14	1.57 x .14	1.57 x .14	1.57 x .14	1.57 x .14	1.57 x .14	1.57 x .14
Hex			27	27	32	32	32	32	32	36	36	36	36	
			1.06	1.06	1.26	1.26	1.26	1.26	1.26	1.26	1.42	1.42	1.42	1.42
Weight (kg/lbs)	One-Part Style		5,2	6,1	9,6	10,7	11,6	12,7	15	17	22,9	30,9	-	-
			11.4	13.4	21.1	23.5	25.5	27.9	33.0	37.4	50.4	68.0	-	-
		Two-Part Style	6,1	7,2	11,5	12,6	15,4	16,5	18,8	20,8	27,9	35,9	42,1	50,3
			13.4	15.8	25.3	27.7	33.9	36.3	41.4	45.7	61.4	79.0	92.6	110.6

Reference: rec.*: Recommended | min.*: Minimum

High Pressure Filter Housings / Complete Filters ■ Type SF-SM

SF-SM **014** **...** **...** **B** / **B** / **P** **T** **230** / **TL** / **OAI** / **X**

1 2 3 4 5 6 7 8 9 10 11 12

1 Type

High Pressure Filter Side Mounted **SF-SM**

2 Group

Flow	Size
60 l/min / 14 US GPM	014
110 l/min / 30 US GPM	030
160 l/min / 45 US GPM	045
240 l/min / 70 US GPM	070
330 l/min / 90 US GPM	090
475 l/min / 125 US GPM	125
660 l/min / 160 US GPM	160
990 l/min / 250 US GPM	250
1135 l/min / 300 US GPM	300

Note: Exact flow will depend on filter element selected.
Consult technical data on pages C43 / C44.

3 Filter Material

Material	max. Δp*collapse	Micron ratings available	Code
Without filter element	-	-	...
Inorg. glass fibre	25 bar / 363 PSI	3, 5, 10, 20	G
Inorg. glass fibre	210 bar / 3045 PSI		H
Stainless fibre	210 bar / 3045 PSI		A
Stainless mesh	30 bar / 435 PSI	25, 50, 100, 200	B, S

Note: * Collapse/burst resistance as per ISO 2941.
Bold types identify preferred materials, other materials on request.

4 Micron Rating

3 μm	03
5 μm	05
10 μm	10
20 μm	20
25 μm	25
50 μm	50
100 μm	100
200 μm	200

Note: Other micron ratings on request.

5 Seal Material

NBR (Buna-N®)	B
FPM (Viton®)	V
EPDM	E

Note: Other sealing materials on request.

6 Valve

Without valve	O
Bypass valve	B
Reverse flow valve	R
Non-return valve	N
Multi-function valve	M

7 Clogging Indicator

Without clogging indicator	O
Visual, with automatic reset	A
Visual, with manual reset	V
Electrical	E
Electrical, Deutsch plug	ED
Visual-electrical	P

8 Thermostop

Without thermostop	none
With thermostop	T

9 Voltage (only for Code P)

24 V DC	024
110 V AC	110
230 V AC	230

10 Style Filterbowl

With bowl in one-part style	none
Toploader, with bowl in two-part style	TL

Note: Group size SF-SM-250 and SF-SM-300 only available in TL-version.

11 Port Connection Location

Inlet above outlet	IAO
Outlet above inlet	OAI

Note: IAO only for SF-SM-014/030/045/070/125
OAI not available for SF-SM-014/030

12 Design Code

Only for information	X
----------------------	----------

Filter Elements ■ Type SE

SE - **014** **G** **10** **B** / **X**

1 2 3 4 5 6

1 Type

Filter Element Series **SE**

2 Group

According to filter housing

4 Micron Rating

3 μm	03
5 μm	05
10 μm	10
20 μm	20
25 μm	25
50 μm	50
100 μm	100
200 μm	200

Note: Other micron ratings on request.

5 Sealing Material

NBR (Buna-N®)	B
FPM (Viton®)	V
EPDM	E

Note: Other sealing materials on request

6 Design Code

Only for information	X
----------------------	----------

3 Filter Material

Material	max. Δp*collapse	Micron ratings available	Code
Inorganic glass fibre	25 bar / 363 PSI	3, 5, 10, 20	G
Inorganic glass fibre	210 bar / 3045 PSI		H
Stainless fibre	210 bar / 3045 PSI		A
Stainless mesh	30 bar / 435 PSI	25, 50, 100, 200	B, S

Note: * Collapse/burst resistance as per ISO 2941. Bold types identify preferred materials, other materials on request.

High Pressure Filters ■ Type SFZ



Product Description

STAUFF SFZ series High Pressure Filters are designed for sandwich plate mounting in manifold block mounting hydraulic applications, with a maximum operating pressure of 315 bar / 4560 PSI. Used together with STAUFF SE series Filter Elements, a high efficiency of contaminant removal is assured. The high dirt-hold capacity of the elements ensures long service life and, as a result, reduced maintenance costs.

Technical Data

Construction

- Designed for sandwich plate mounting

Materials

- Filter head: Free Cutting Steel
- Filter bowl: Cold Drawn Steel
- O-rings: NBR (Buna-N®)
FPM (Viton®)
EPDM (Ethylene-Propylene-Diene-Monomer-Rubber)
- Support ring (bowl): PTFE (Polytetrafluoroethylene)

Connecting Port

- According to ISO 4401-03-02-0-05 NG6 / DIN24340-A6 / Cetop R 35 H (Ref.: NFPA/ANSI D03)

Operating Pressure

- Max. 315 bar / 4560 PSI

Burst Pressure

- Min. 945 bar / 13705 PSI

Temperature Range

- 10 °C ... +100 °C / +14 °F ... +212 °F

Filter Elements

- Specifications see page C38 / C41

Media Compatibility

- Mineral oils, other fluids on request

O-ring for connection ports

- 9x1,7 (4x included in delivery)


Options and Accessories

Clogging Indicator


- Standard actuating pressure: 5_{-0,5} bar / 72.5_{-7.25} PSI Δp
8_{-0,5} bar / 116_{-7.25} PSI Δp
Other actuating pressure settings are available upon request.
- Available indicators: Visual
Electrical
Visual-electrical (24 V DC, 110 V AC, 230 V AC versions)

High Pressure Filters ▪ Type SFZ


Version - right

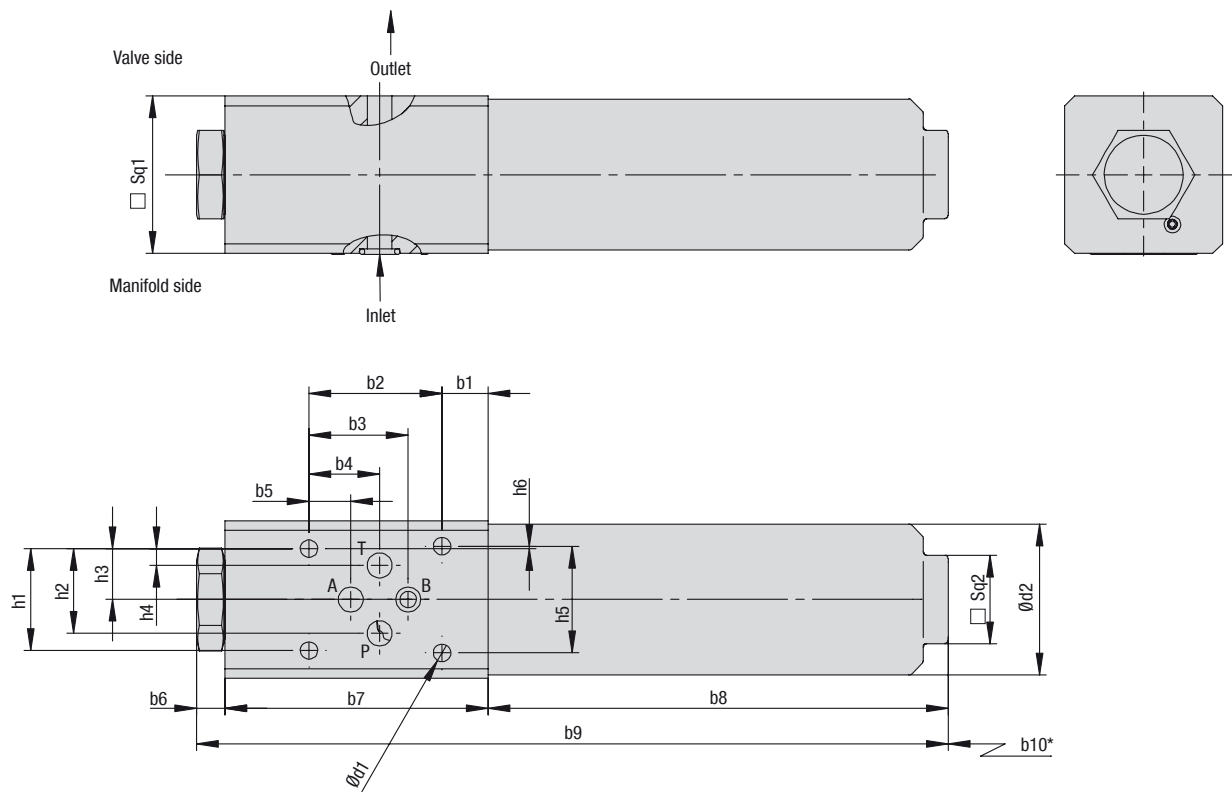

Version - left

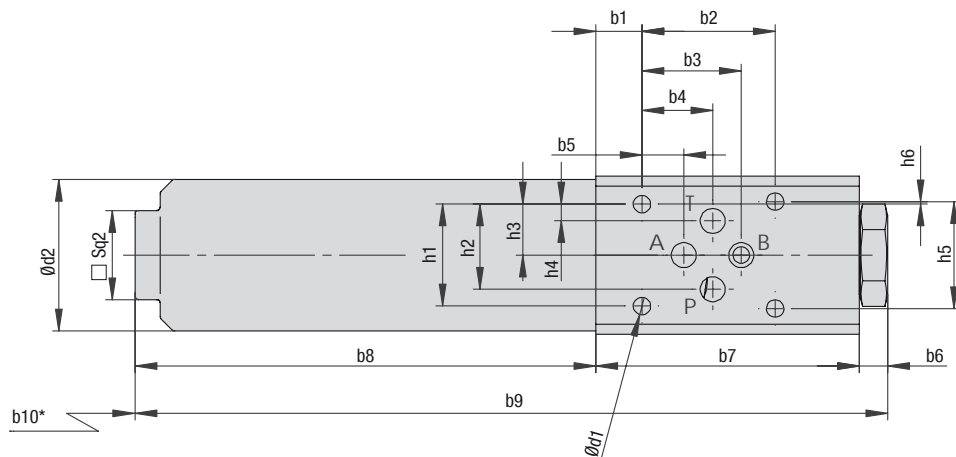

Symbol for hydraulic systems
SFZ008

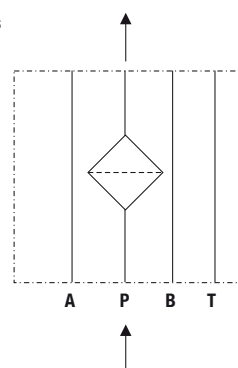

* recommended space for element change

High Pressure Filters ■ Type SFZ

Dimensions (mm/in)	Filter Size SFZ
	SFZ008
b1	14
	.55
b2	40,5
	1.59
b3	30,2
	1.19
b4	21,5
	.85
b5	12,7
	.50
b6	9
	.35
b7	80
	3.15
b8	140
	5.51
b9	229
	9.02
b10	50
	1.97
d1	5,3
	.21
d2	46
	1.81
h1	31
	1.22
h2	25,8
	1.02
h3	15,5
	.61
h4	5,1
	.20
h5	32,5
	1.28
h6	0,75
	.03
Sq1	48
	1.89
Sq2	27
	1.06

High Pressure Filter Housings / Complete Filters ■ Type SFZ

SFZ **008** **...** **...** **B** / **B** / **P** **T** **230** - **5,0** / **R** / **X**

1 2 3 4 5 6 7 8 9 10 11 12

1 Type

High Pressure Filter for sandwich plate mounting **SFZ**

2 Group

Flow	Size
30 l/min / 8 US GPM	008

Note: Exact flow will depend on filter element selected.

3 Filter Material

Please note that the filter element is not protected by an internal bypass. Please be sure that the hydraulic systems is designed with the sufficient means to protect the element.

Material	max. Δp*collapse	Micron ratings available	Code
Without filter element	-	-	...
Inorg. glass fibre	25 bar / 363 PSI	3, 5, 10, 20	G
Inorg. glass fibre	210 bar / 3045 PSI		H
Stainless fibre	210 bar / 3045 PSI		M
Stainless mesh	30 bar / 435 PSI	25, 50, 100, 200	S

Note: * Collapse/burst resistance as per ISO 2941.
Bold types identify preferred materials, other materials on request.

4 Micron Rating

3 µm	03
5 µm	05
10 µm	10
20 µm	20
25 µm	25
50 µm	50
100 µm	100
200 µm	200

Note: Other micron ratings on request.

5 Sealing Material

NBR (Buna-N®)	B
FPM (Viton®)	V
EPDM	E

Note: Other sealing materials on request.

6 Connection Size

Connection Size	Group	Code
	008	
Nominal Bore	NG6* (Ref.: D03)	B

* ISO 4401-03-02-0-05 / DIN 24340-A6 / Cetop R 35 H

7 Clogging Indicator

Without clogging indicator	0
Visual, with automatic reset	A
Visual, with manual reset	V
Electrical	E
Electrical, Deutsch plug	ED
Visual-electrical	P

8 Thermostop

Without thermostop	none
With thermostop	T

9 Voltage (only for Code P)

24 V DC	024
110 V AC	110
230 V AC	230

10 Actuating Pressure Clogging Indicator

5,0 bar / 72,5 PSI	5,0
8,0 bar / 116 PSI	8,0

11 Design

Version right	R
Version left	L

12 Design Code

Only for information	X
----------------------	----------

Filter Elements ■ Type SE

SE - **008** **G** **10** **B** / **X**

1 2 3 4 5 6

1 Type

Filter Element Series **SE**

2 Group

According to filter housing

3 Filter Material

Please note that the filter element is not protected by an internal bypass. Please be sure that the hydraulic systems is designed with the sufficient means to protect the element.

Material	max. Δp*collapse	Micron ratings available	Code
Inorg. glass fibre	25 bar / 363 PSI	3, 5, 10, 20	G
Inorg. glass fibre	210 bar / 3045 PSI		H
Stainless fibre	210 bar / 3045 PSI		M
Stainless mesh	30 bar / 435 PSI	25, 50, 100, 200	S

* Collapse/burst resistance as per ISO 2941.
Bold types identify preferred materials, other materials on request.

4 Micron Rating

3 µm	03
5 µm	05
10 µm	10
20 µm	20
25 µm	25
50 µm	50
100 µm	100
200 µm	200

Note: Other micron ratings on request.

5 Sealing Material


NBR (Buna-N®)	B
FPM (Viton®)	V
EPDM	E

Note: Other sealing materials on request.

6 Design Code

Only for information	X
----------------------	----------

Medium Pressure Filters ■ Type SFA

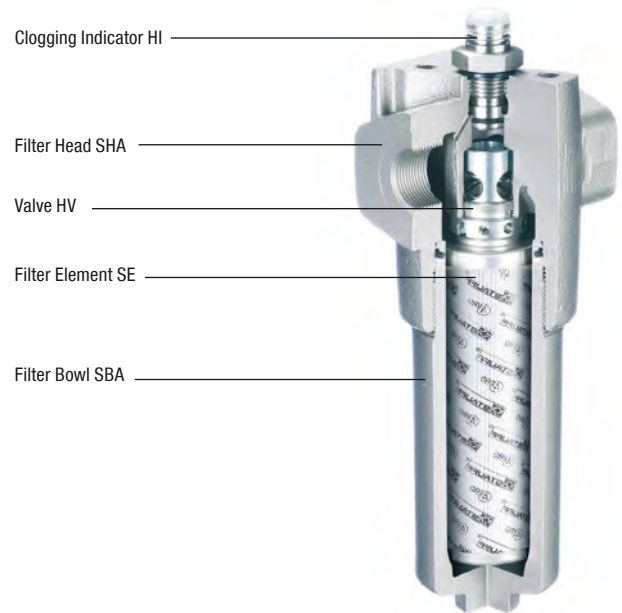

Product Description

STAUFF SFA series Medium Pressure Filters are designed for in-line hydraulic applications with a maximum operating pressure of 160 bar / 2320 PSI. Used together with STAUFF SE series Filter Elements, a high efficiency of contamination removal is assured. The dirt-hold capacity of the elements ensures long service life, and as a result, reduced maintenance costs.

Technical Data

Construction

- Designed for in-line assembly, with threaded mounting holes on top of the head.

Materials

- Filter head: Cast Aluminum
- Filter bowl: Aluminium
- O-rings: NBR (Buna-N®)
FPM (Viton®)
EPDM (Ethylene-Propylene-Diene-Monomer-Rubber)
- Support ring: PTFE (Polytetrafluoroethylene)

Port Connections

- BSP
- NPT
- SAE O-ring thread
- SAE Code 61 Flange

Operating Pressure

- SFA014/030: Max. 160 bar / 2320 PSI
Max. 190 bar / 2755 PSI (according to ANSI T2.6.1. R2-2001)
- SFA045/070: Max. 150 bar / 2175 PSI
Max. 171 bar / 2480 PSI (according to ANSI T2.6.1. R2-2001)

Burst Pressure

- Min. 480 bar / 6960 PSI

Temperature Range

- 10 °C ... +100 °C / +14 °F ... +212 °F

Filter Elements

- Specifications see page C38 / C41

Media Compatibility

- Mineral oils, other fluids on request

Options and Accessories

Valve



- Bypass valve: Allows unfiltered oil to bypass the contaminated element once the opening pressure has been reached, a differential pressure of $6^{+0.5}$ bar / $87^{+7.25}$ PSI Δp is the standard setting. Other settings available upon request.
- Reverse flow valve: Allows reverse flow through the filter head without backflushing the element.
- Non-return valve: Prevents draining of the delivery line during element change.
- Multi-function valve: Opening pressure $6^{+0.5}$ bar / $87^{+7.25}$ PSI
Bypass, reverse flow capability and non-return valve combined in one valve.

Clogging Indicator


- Standard actuating pressure: $5^{-0.5}$ bar / $72.5^{-7.25}$ PSI Δp
Other actuating pressure settings are available upon request.
- Available indicators: Visual
Electrical
Visual-electrical (24 V DC, 110 V AC, 230 V AC versions)

Medium Pressure Filters ■ Type SFA


SFA014...070

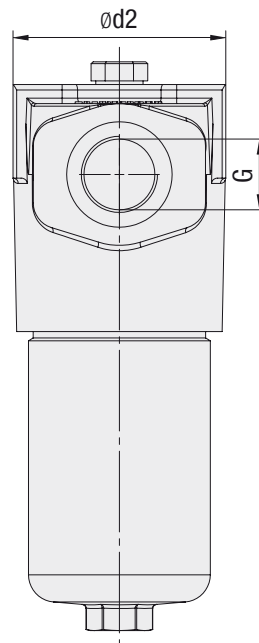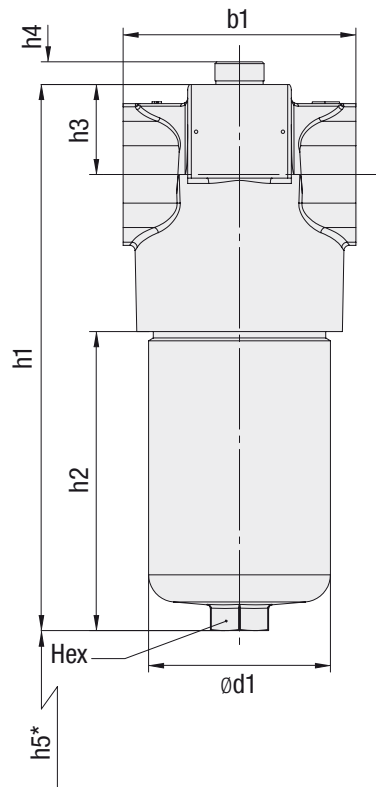

Threaded connection

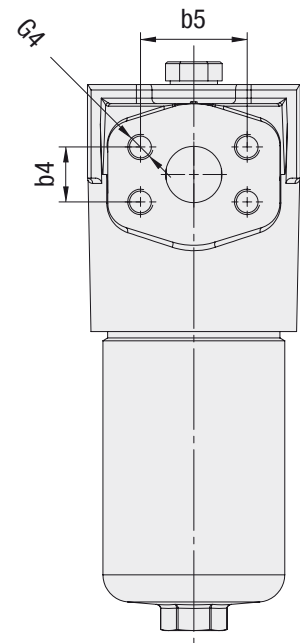

Flange connection

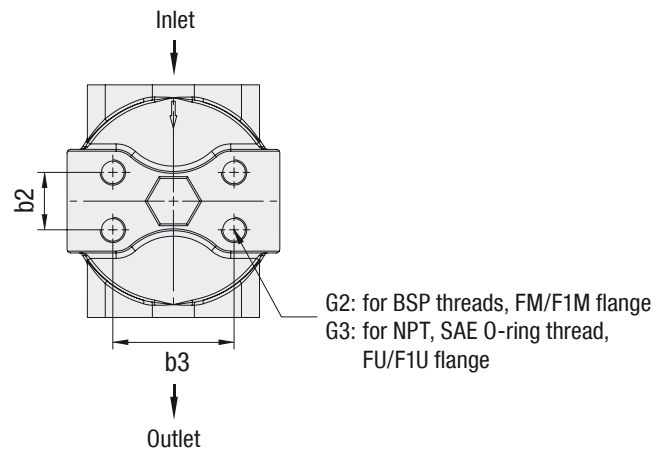

* recommended space for element change

Medium Pressure Filters ■ Type SFA

Thread Connection G	Filter Size SFA			
	014	030	045	070
BSP	3/4	3/4	1-1/4	1-1/4
NPT	3/4	3/4	1-1/4	1-1/4
SAE O-ring Thread	1-1/6-12	1-1/6-12	1-5/8-12	1-5/8-12
SAE Flange 3000 PSI	3/4	3/4	1-1/4	1-1/4
Weight (kg/lbs)	2,1	2,54	4,6	5,3
	4,7	5,6	10,2	11,8

Dimensions (mm/in)		Filter Size SFA			
		014	030	045	070
b1		92	92	128	128
		3.62	3.62	5.04	5.04
d1		72	72	100	100
		2.83	2.83	3.93	3.93
d2		86	86	117	117
		3.39	3.39	4.61	4.61
h1		187,5	255	241,5	301
		7.38	10.04	9.51	11.85
h2		78	145,5	105	164,5
		3.07	5.73	4.13	6.46
h3		40	40	49,5	49,5
		1.58	1.58	1.95	1.95
h4		12,5	12,5	12,5	12,5
		.49	.49	.49	.49
h5	rec.*	100	170	140	200
		3.94	6.69	5.51	7.87
	min.*	85	85	120	120
		3.35	3.35	4.72	4.72
Hex		27	27	32	32
		1.05	1.05	1.25	1.25
Dimensions SAE Flange 3000 PSI	b4	22,2	22,2	47,6	47,6
		.87	.87	1.87	1.87
	b5	30,2	30,2	58,7	58,7
		1.19	1.19	2.32	2.32
	G4	M10 x 15 or	M10 x 15 or	M14 x 17 or	M14 x 17 or
		3/8-16 UNC	3/8-16 UNC	7/8-14 UNC	7/8-14 UNC

Reference: rec.*: Recommended | min.*: Minimum

Dimensions (mm/in)		Filter Size SFA			
		014	030	045	070
T	b2	23,8	23,8	31,6	31,6
		.94	.94	1.24	1.24
	b3	50,8	50,8	66,7	66,7
		2.00	2.00	2.63	2.63
	G2	M10 x 15	M10 x 15	M14 x 20	M14 x 20
	G3	3/8-16 UNC x .59	3/8-16 UNC x .59	1/2-13 UNC x .59	1/2-13 UNC x .59

Medium Pressure Filter Housings / Complete Filters ■ Type SFA

SFA **014** **...** **...** **V** / **T** **B** / **B** / **P** **T** **230** / **X**

1 2 3 4 5 6 7 8 9 10 11 12

1 Type

Medium Pressure Filter **SFA**

2 Group

Flow	Size
60 l/min / 14 US GPM	014
110 l/min / 30 US GPM	030
160 l/min / 45 US GPM	045
240 l/min / 70 US GPM	070

Note: Exact flow will depend on filter element selected.
Consult technical data on pages C43 / C44.

3 Filter Material

Material	max. Δp*collapse	Micron ratings available	Code
Without filter element	-	-	...
Inorg. glass fibre	25 bar / 363 PSI	3, 5, 10, 20	G
Inorg. glass fibre	210 bar / 3045 PSI		H
Stainless fibre	210 bar / 3045 PSI		A
Stainless mesh	30 bar / 435 PSI	25, 50, 100, 200	B, S

Note: * Collapse/burst resistance as per ISO 2941.
Bold types identify preferred materials, other materials on request.

4 Micron Rating

3 µm	03
5 µm	05
10 µm	10
20 µm	20
25 µm	25
50 µm	50
100 µm	100
200 µm	200

Note: Other micron ratings on request.

5 Sealing Material

NBR (Buna-N®)	B
FPM (Viton®)	V
EPDM	E

Note: Other sealing materials on request.

6 Connection Flange

Type T	T
--------	----------

7 Connection Style

Connection Style	Group				Thread Style	Code
	014	030	045	070		
BSP	3/4		1-1/4		metric	B
BSP	1		1-1/2		metric	B1
NPT	3/4		1-1/4		UNC	N
SAE O-ring Thread	1-1/16-12		1-5/8-12		UNC	U
SAE Flange 3000 PSI	3/4		1-1/4		metric	FM
SAE Flange 3000 PSI	3/4		1-1/4		UNC	FU
SAE Flange 3000 PSI	1		-		metric	F1M
SAE Flange 3000 PSI	1		-		UNC	F1U

Note: Other port connections on request. Bold types identify preferred connection styles.

8 Valve

Without valve	O
Bypass valve	B
Reverse flow valve	R
Non-return valve	N
Multi-function valve	M

9 Clogging Indicator

Without clogging indicator	O
Visual, with automatic reset	A
Visual, with manual reset	V
Electrical	E
Electrical, Deutsch plug	ED
Visual-electrical	P

10 Thermostop

Without thermostop	none
With thermostop	T

11 Voltage (only for Code P)

24 V DC	024
110 V AC	110
230 V AC	230

12 Design Code

Only for information	X
----------------------	----------

Filter Elements ■ Type SE

SE - **014** **G** **10** **B** / **X**

1 2 3 4 5 6

1 Type

Filter Element Series **SE**

2 Group

According to filter housing

3 Filter Material

Material	max. Δp*collapse	Micron ratings available	Code
Inorganic glass fibre	25 bar / 363 PSI	3, 5, 10, 20	G
Inorganic glass fibre	210 bar / 3045 PSI		H
Stainless fibre	210 bar / 3045 PSI		A
Stainless mesh	30 bar / 435 PSI	25, 50, 100, 200	B, S

Note: Collapse/burst resistance as per ISO 2941. Bold types identify preferred materials, other materials on request.

4 Micron Rating

3 µm	03
5 µm	05
10 µm	10
20 µm	20
25 µm	25
50 µm	50
100 µm	100
200 µm	200

Note: Other micron ratings on request.

5 Sealing Material

NBR (Buna-N®)	B
FPM (Viton®)	V
EPDM	E

Note: Other sealing materials on request.

6 Design Code

Only for information	X
----------------------	----------

Valves

Product Description (not available for SFZ)

The optional valves are fitted as an insert in the filter head and incorporate the spigot on which the element seals. The valve is selected to suit the filter application.

HV-O **Non-bypass standard insert** without any valve function.
Element collapse rating should be higher than the system pressure

HV-B **Bypass valve** which allows oil to bypass the element when the differential pressure across the element reaches $6^{+0.5}$ bar / $87^{+7.25}$ PSI. (Other pressure settings available on request). The opening pressure should be higher than the Δp setting of an optional clogging indicator. Low collapse 30 bar / 435 PSI Δp elements are normally used with this valve.

HV-R **Reverse flow valve** is used in systems where there is flow in reverse through the filter. It allows reverse flow without backflushing the element but does not filter in the reverse direction. Element collapse rating should be higher than the system pressure.

HV-N **Non-return valve**
This valve prevents the oil in the delivery line from draining out while the filter is being serviced. Because there is no bypass, the element collapse rating should be higher than system pressure.

HV-M **Multi-function valve**
This valve combines the bypass, the reverse flow and the non-return functions in one unit. The by-pass opening pressure is $6^{+0.5}$ bar / $87^{+7.25}$ PSI Δp with other opening pressures available on request. The opening pressure should be higher than the Δp setting of an optional clogging indicator. Low collapse 30 bar / 435 PSI Δp elements are normally used with this valve.

Order Code

HV - M 014 / 030 / X

1 2 3 4

1 Type

Valve for Pressure Filters **HV**

2 Valve Type


Non-bypass standard insert without any valve	O
Bypass valve	B
Reverse flow valve	R
Non-return valve	N
Multi-function valve	M

3 Filter Group

For filter size 014/030	014/030
For filter size 045/070/125	045/070
For filter size 090/160/250/300	090/160

4 Design Code

Only for information **X**

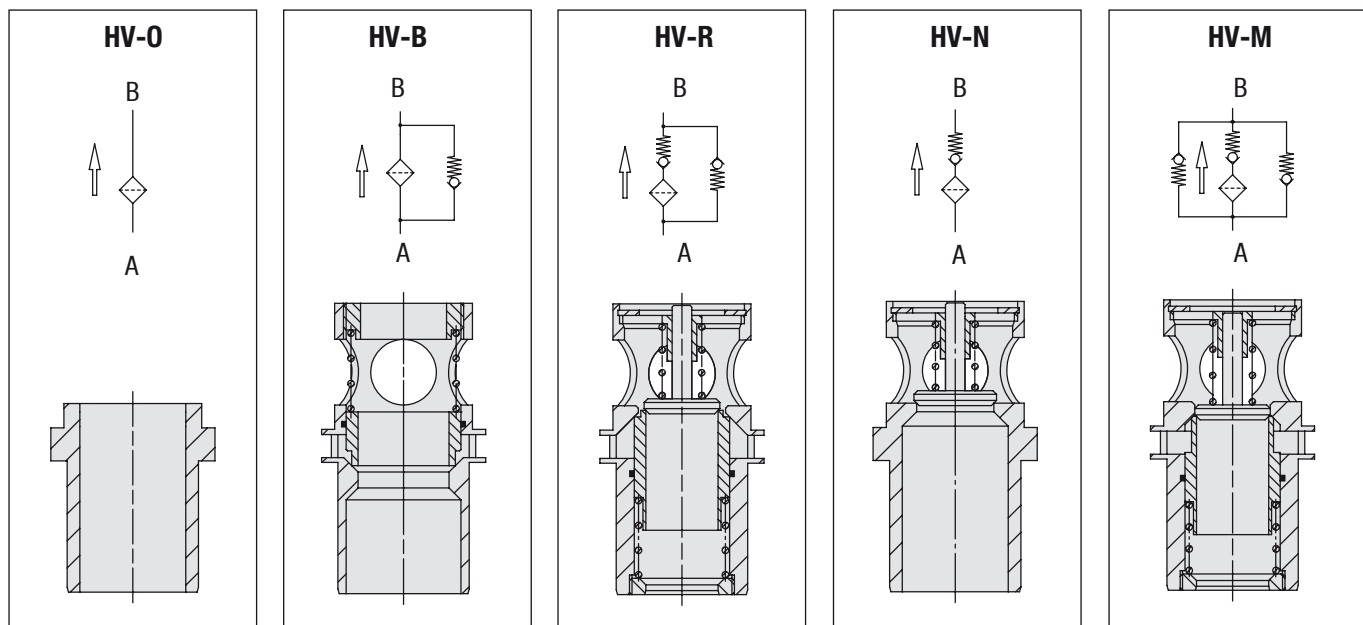

Flow characteristics of the valves see page C42.

Clogging Indicators

Product Description

STAUFF Pressure Filters have a wide range of clogging indicators available. If no indicator is specified, the port is sealed by a plug (HI-0). The clogging indicators are actuated by the differential pressure (Δp) across the element. The special piston design minimizes the effects of peak pressures in the system. An optional thermal lockout (thermo-stop) is available to prevent false indication under cold start conditions. Fluid temperature have to be at least +20 °C / +68 °F for the indicator to function.

Technical Data

Materials

- Body: Stainless Steel
- Sealings: NBR (Buna-N®)
FPM (Viton®)
EPDM (Ethylene-Propylene-Diene-Monomer-Rubber)

Thread

- G 1/2

Differential Pressure

- 5_{-0,5} bar / 72.5_{7,25} PSI pressure setting (other settings on request)

Electrical

- Plug according to DIN-EN 175301-803 A (DIN 43650-A).
- Screwed cable gland PG11
- Protection rating (DIN 40050) IP65
- Both NO and NC contacts are available in the switch, rated capacity: see chart below
- Deutsch plug

The visual clogging indicators are available in the following configurations:

- Manual reset:** The indicator continues to display the clogged signal even through the Δp may have fallen. Pressing the plastic cover down will reset the indicator.
- Automatic reset:** The clogged signal will disappear when the Δp drops below the setting for the indicator.

Electrical and visual-electrical clogging indicators are only available with automatic reset.

Note: The customer / user carries the responsibility for the electrical connection.

Order Code

HI - **P** **T** **230** **B** **2,5B** / **X**

1 2 3 4 5 6 7

1 Type

Clogging Indicator for Pressure Filters **HI**

2 Indicator Type

Plug **0**
Visual, automatic reset **A**
Visual, manual reset **V**
Electrical **E**
Electrical, Deutsch plug **ED**
Visual-electrical **P**

3 Thermostop

Without thermostop **none**
With thermostop **T**

4 Voltage (only for Code P)

24 V DC **024**
110 V AC **110**
230 V AC **230**

5 Sealing Material

NBR (Buna-N®) **B**
FPM (Viton®) **V**
EPDM **E**

6 Differential Pressure Setting

1,72 bar / 25 PSI **25P**
2,0 bar / 29 PSI **2,0B**
2,5 bar / 36.3 PSI **2,5B**
3,0 bar / 43.5 PSI **3,0B**
5,0 bar / 72.5 PSI (standard option) **5,0B**
7,0 bar / 101.5 PSI **7,0B**

7 Design Code


Only for information **X**

Rated Capacity HI-E and HI-P

Voltage V	Resistive Load A	Inductive Load A
110 V AC	5A	3A
230 V AC	3A	2A
24 V DC	4A	3A

High voltage peaks occur when inductive loads are switched off. Protective circuitry should be employed to reduce contact burnout.

Dimensions

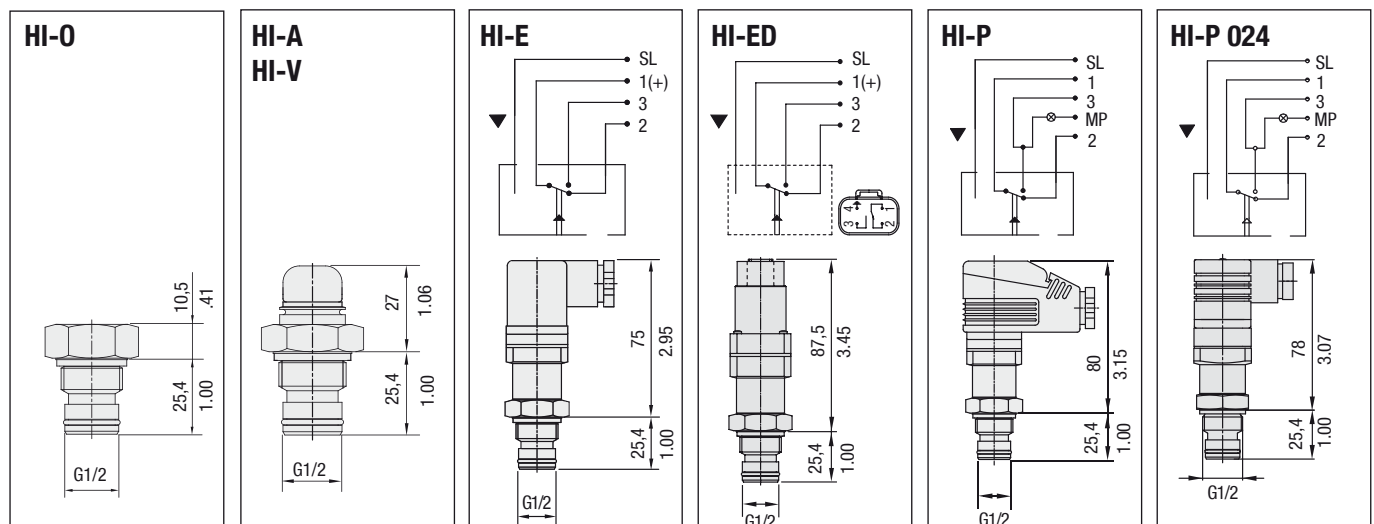

Replacement Filter Elements ■ Type SE



Product Description

STAUFF SE series Replacement Filter Elements for SF / SF-TM / SF-SM / SFZ / SFA series filter housings are manufactured in the common filter materials such as Stainless Fibre, Stainless Mesh and Inorganic Glass Fibre. As standard, all Replacement Elements SE series have tin-plated steel parts for use with aggressive media such as water glycol, other materials available on request. All STAUFF Replacement Elements comply with quality specifications in accordance with international standards.

Order Code

SE - 014 G 10 B / X

1 2 3 4 5 6

1 Type

Filter Element Series **SE**

2 Group

According to filter housing

3 Filter Material

Material	max. Δp*collapse	Micron ratings available	Code
Inorganic glass fibre	25 bar / 363 PSI	3, 5, 10, 20	G
Inorganic glass fibre	210 bar / 3045 PSI		H
Stainless fibre	210 bar / 3045 PSI		A
Stainless mesh	30 bar / 435 PSI	25, 50, 100, 200	B, S

Note: * Collapse/burst resistance as per ISO 2941. Bold types identify preferred materials, other materials on request.

4 Micron Rating

3 µm	03
5 µm	05
10 µm	10
20 µm	20
25 µm	25
50 µm	50
100 µm	100
200 µm	200

Note: Other micron ratings on request.

5 Sealing Material

NBR (Buna-N®)	B
FPM (Viton®)	V
EPDM	E



Note: Other sealing materials on request.

6 Design Code





Only for information	X
----------------------	----------

High and Medium Pressure Filters ■ Type SF / SF-TM / SF-SM / SFZ / SFA

The following characteristics are valid for mineral oils with a density of 0,85 kg/dm³ and the kinematic viscosity of 30 mm²/s (30 cSt). The characteristics have been determined in accordance to ISO 3968. Multipass filter ratings have been obtained in accordance to ISO 16889. Consult STAUFF for details.










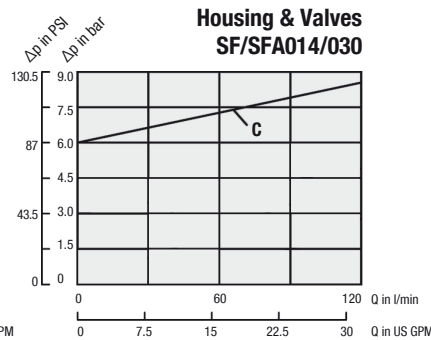
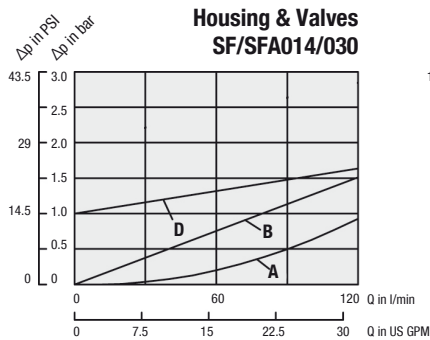


Valve Configuration	Flow direction	Curve
Housing with HV-O or HV-B	Inlet → Outlet	A
HVM, HV-R, HV-N	Inlet → Outlet	B
HV-M, HV-B	Inlet → Outlet	C
<ul style="list-style-type: none"> Element 100% blocked Bypass only In reality always mixed mode 	Inlet → Outlet	C
HV-M, HV-R Reverse mode	Outlet → Inlet	D

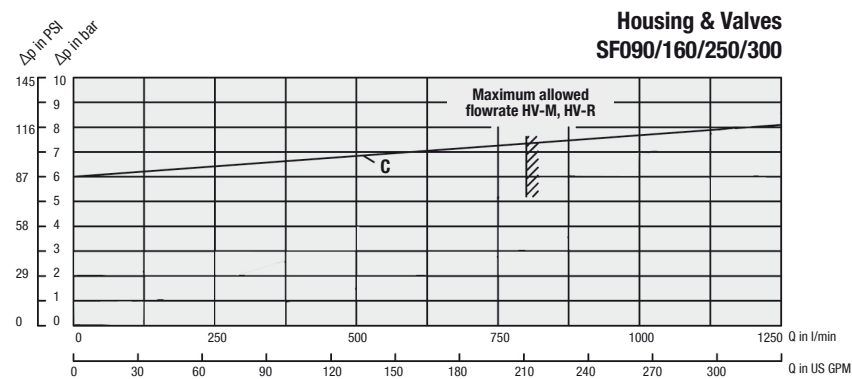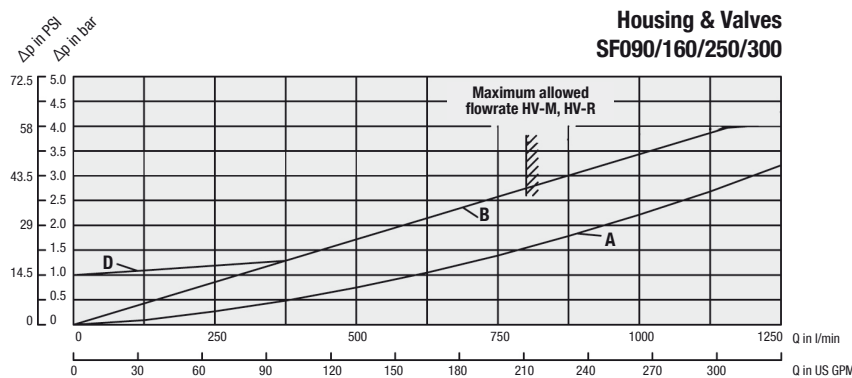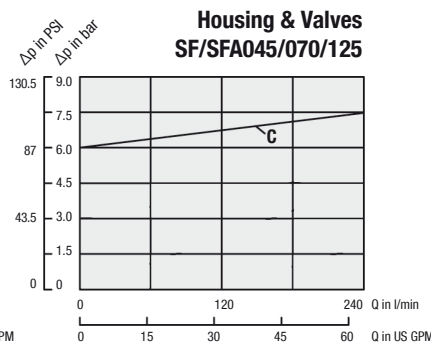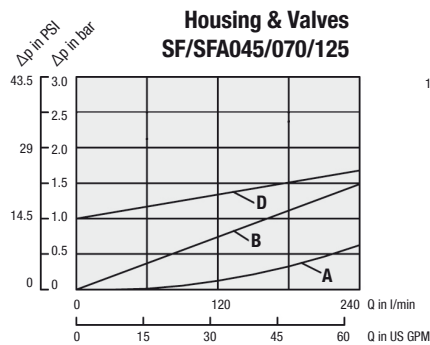


High and Medium Pressure Filters ■ Type SF / SF-TM / SF-SM / SFZ / SFA

The following characteristics are valid for mineral oils with a density of 0,85 kg/dm³ and the kinematic viscosity of 30 mm²/s (30 cSt). The characteristics have been determined in accordance to ISO 3968. Multipass filter ratings have been obtained in accordance to ISO 16889. Consult STAUFF for details.

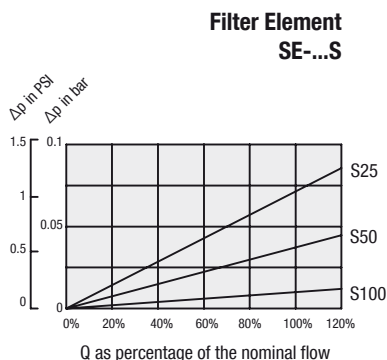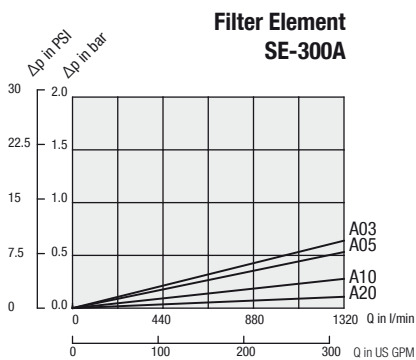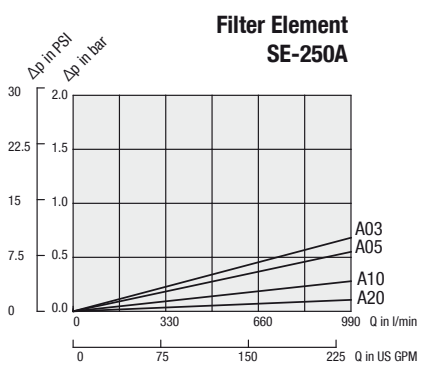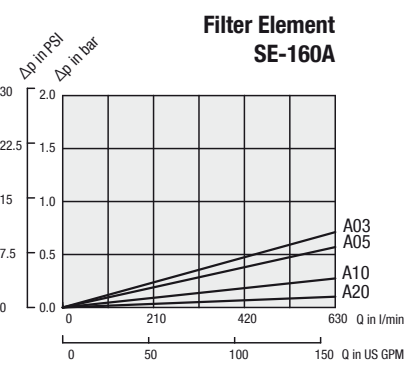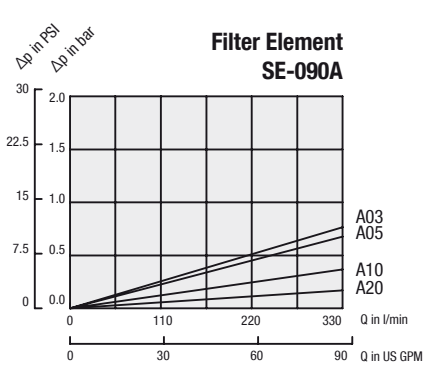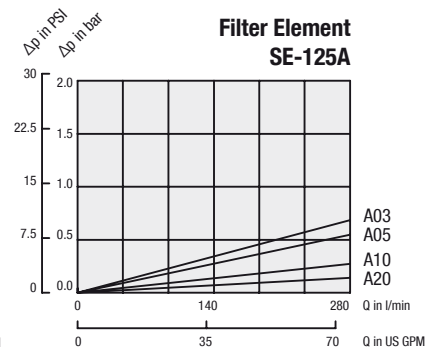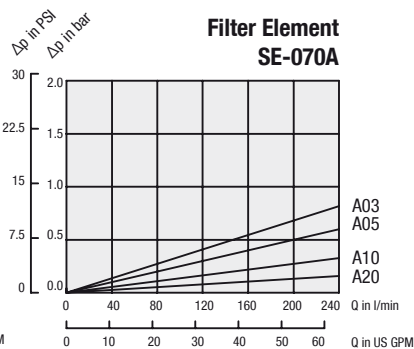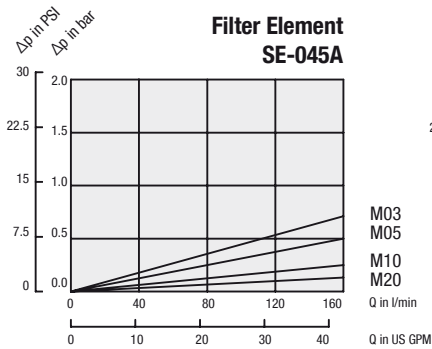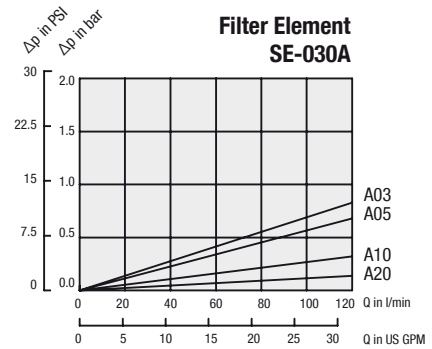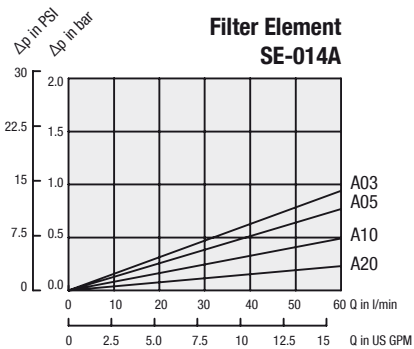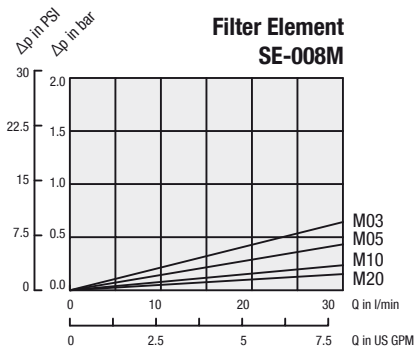

High and Medium Pressure Filters ■ Type SF / SF-TM / SF-SM / SFZ / SFA

The following characteristics are valid for mineral oils with a density of 0,85 kg/dm³ and the kinematic viscosity of 30 mm²/s (30 cst). The characteristics have been determined in accordance to ISO 3968. Multipass filter ratings have been obtained in accordance to ISO 16889. Consult STAUFF for details.

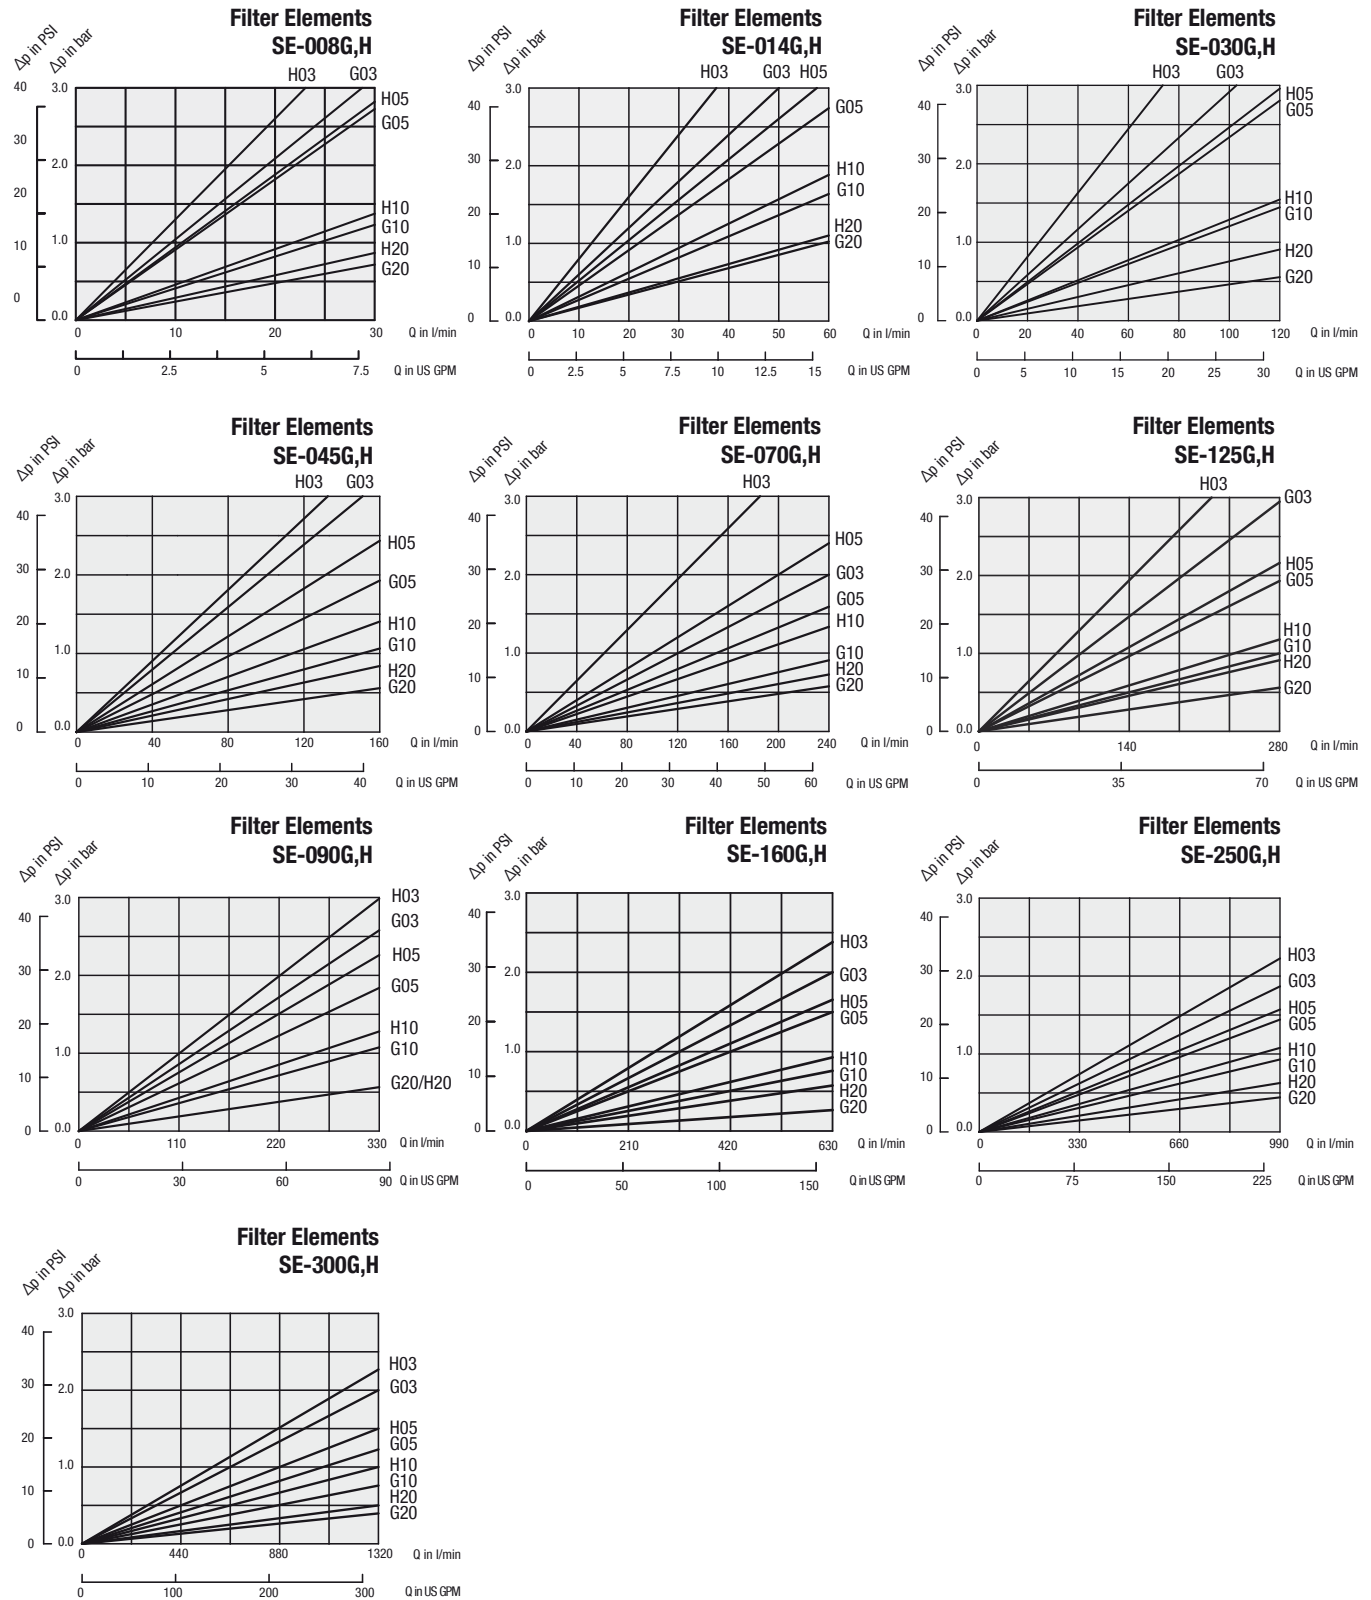

Medium Pressure Filters ■ Type SMPF



Product Description

STAUFF SMPF Medium Pressure Filters are designed for in-line hydraulic applications with a maximum operating pressure of 110 bar / 1600 PSI. Used together with STAUFF Filter Elements, a high efficiency of contamination removal is assured.

Technical Data

Construction

- In-line assembly

Materials

- Filter head: Aluminium Alloy
- Filter bowl: Aluminium Alloy
- Sealings: NBR (Buna-N®)

Port Connections

- BSP
- SAE O-ring thread

Flow Rating

- Up to 90 l/min / 25 US GPM

Operating Pressure

- Max. 110 bar / 1600 PSI

Burst Pressure

- 300 bar / 4350 PSI

Temperature Range

- -25 °C ... +110 °C / -13 °F ... +230 °F

Filter Elements

- Specifications see page C48

Media Compatibility

- Mineral oils, other fluids on request

Options and Accessories


Valve

- Bypass valve: Allows unfiltered oil to bypass the contaminated element once the opening pressure has been reached
6 bar / 87 PSI ±10% is the standard actuating pressure

Clogging Indicators

- Standard actuating pressure: 5 bar / 72.5 PSI ±10%
- Available indicators: Visual
Visual-electrical

Medium Pressure Filters ■ Type SMPF

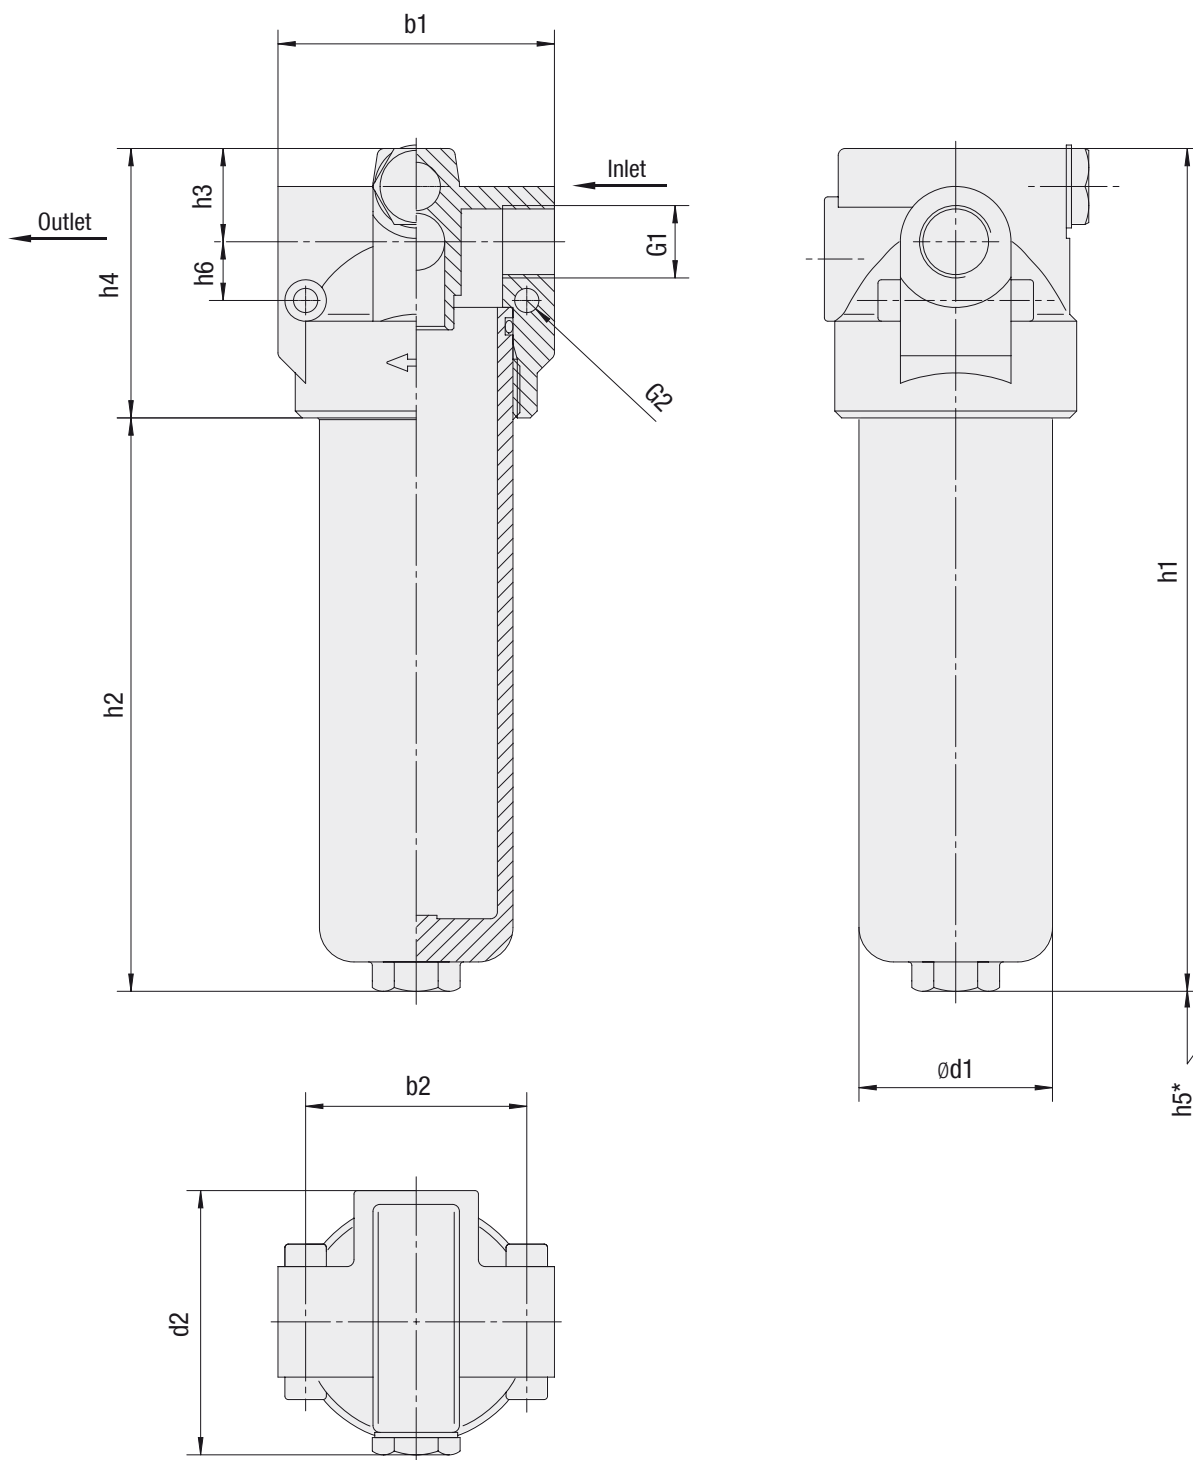

* recommended space for element change

Medium Pressure Filters ■ Type SMPF

Thread Connection G1	Filter Size SMPF	
	015	025
Nominal Flow (l/min / US GPM)	60	90
	15	25
BSP	1/2	1/2
SAE O-ring thread	3/4-16	3/4-16
Weight (kg/lb)	0.95	1.25
	2.09	2.76

Dimensions (mm/in)	Filter Size SMPF	
	015	025
b1	80	80
	3.15	3.15
b2	64	64
	2.52	2.52
d1	56	56
	2.20	2.20
d2	76,5	76,5
	3.01	3.01
h1	157	244
	6.18	9.61
h2	79	166
	3.11	6.54
h3	27	27
	1.06	1.06
h4	78	78
	3.07	3.07
h5	60	60
	2.36	2.36
h6	17	17
	.67	.67
G2	7	7
	.28	.28

Medium Pressure Filter Housings / Complete Filters ■ Type SMPF

SMPF 015 ... B / T B / B / VE / X

1 2 3 4 5 6 7 8 9 10

1 Type

Medium Pressure Filter **SMPF**

2 Group

Flow	Size
60 l/min / 15 US GPM	015
90 l/min / 25 US GPM	025

Note: Exact flow will depend on filter element selected
Consult technical data on page C50.

3 Filter Material

Material	Max. Δp^* collapse	Micron ratings available	Code
Without filter element	-	-	...
Inorg. glass fibre	20 bar / 290 PSI	03, 10, 20	E
Stainless mesh	20 bar / 290 PSI	60	S

* Note: Collapse/burst resistance as per ISO 2941.
Other materials on request.

4 Micron Rating

3 μ m	03
10 μ m	10
20 μ m	20
60 μ m	60

Note: Other micron ratings on request.

5 Sealing Material

NBR (Buna®) **B**
Note: Other sealing materials on request.

6 Mounting Style

In-line **T**

7 Connection Style

BSP 1/2 **B**
SAE O-ring thread 3/4-16 **U**

8 Valve

Without valve **0**
Bypass valve **B**

9 Clogging Indicator

Without Clogging Indicator **0**
Visual **V**
Visual-electrical **VE**

10 Design Code

Only for information **X**

Filter Elements ■ Type SME

SME - 015 E 03 B / X

1 2 3 4 5 6

1 Type

Filter Element Series **SME**

2 Group

According to filter housing

3 Filter Material

Material	Max. Δp^* collapse	Micron ratings available	Code
Inorg. glass fibre	20 bar / 290 PSI	03, 10, 20	E
Stainless mesh	20 bar / 290 PSI	60	S

* Note: Collapse/burst resistance as per ISO 2941.
Other materials on request.

4 Micron Rating

3 μ m	03
10 μ m	10
20 μ m	20
60 μ m	60

Note: Other micron ratings on request.

5 Sealing Material

NBR (Buna®) **B**
Note: Other sealing materials on request.


6 Design Code

Only for information **X**

Medium Pressure Filters ■ Type SMPF


Visual Clogging Indicator

Part number HIM-V is a clogging indicator actuated by the differential pressure across the filter element. The actuating pressure of 5 bar / 72.5 PSI allows the dirty element to be changed before the bypass setting of 6 bar / 87 PSI is reached.

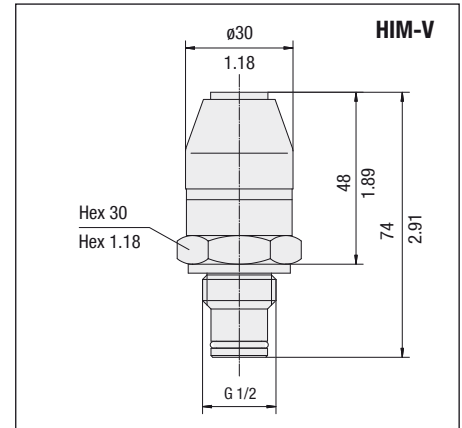

Visual-Electrical Clogging Indicator

Part number HIM-VE is used when an electrical signal is needed to indicate when the element needs changing. It is actuated by the differential pressure across the filter element. The actuating pressure of 5 bar / 72.5 PSI allows the dirty element to be changed before the bypass setting of 6 bar / 87 PSI is reached.

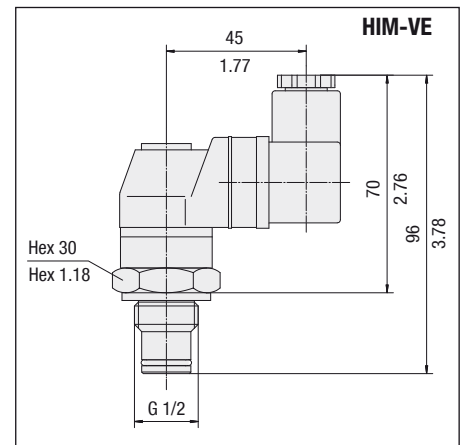


Dimensions in mm / in

HIM-VE Rated Capacity

Voltage V	Resistive Load A	Inductive Load A
125 V AC	5	5
250 V AC	5	5
15 V AC	10	10
30 V DC	5	5
50 V DC	1	1
125 V DC	0.50	0.06

Note: The customer / user carries the responsibility for the electrical connection.






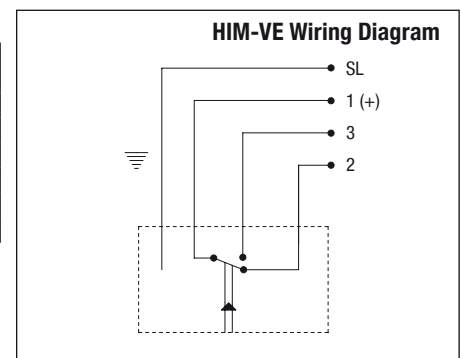


Order Code

<div> <div>HIM</div> <div>-</div> <div>V</div> <div>-</div> <div>B</div> <div>-</div> <div>5,0B</div> <div>/</div> <div>X</div> </div>				
1	2	3	4	5
1 Type Clogging Indicator SMPF Series HIM	2 Indicator Type Visual Visual-electrical	3 Sealing Material NBR (Buna®) B	4 Differential Pressure Setting 5,0 bar / 72.5 PSI 5,0B	5 Design Code Only for information X

Medium Pressure Filters ■ Type SMPF Flow Characteristics

The following characteristics are valid for mineral oils with a density of $0,85 \text{ kg/dm}^3$ and the kinematic viscosity of $30 \text{ mm}^2/\text{s}$ (30 cSt). The characteristics have been determined in accordance to ISO 3968. Multipass filter ratings have been obtained in accordance to ISO 16889. Consult STAUFF for details.

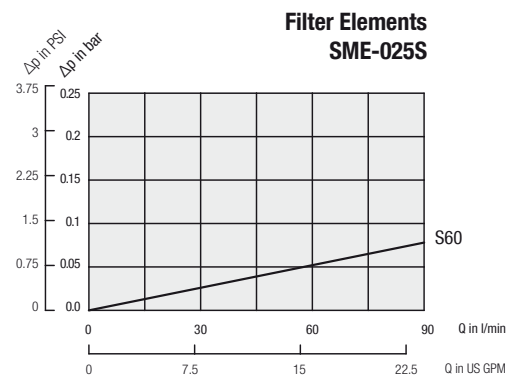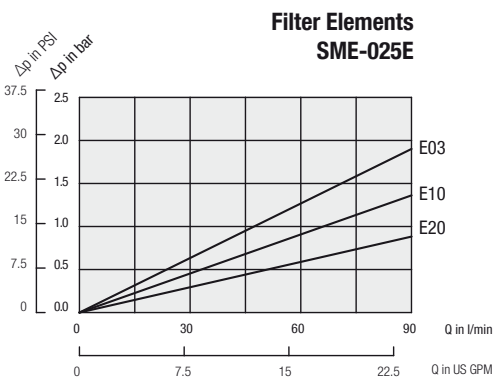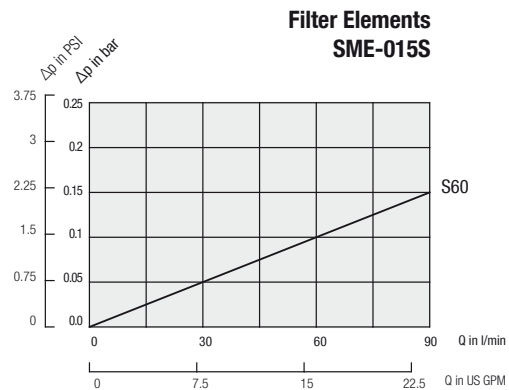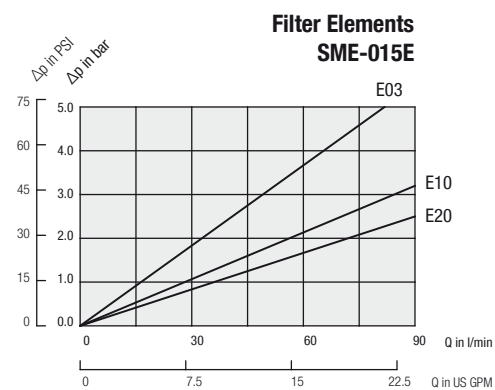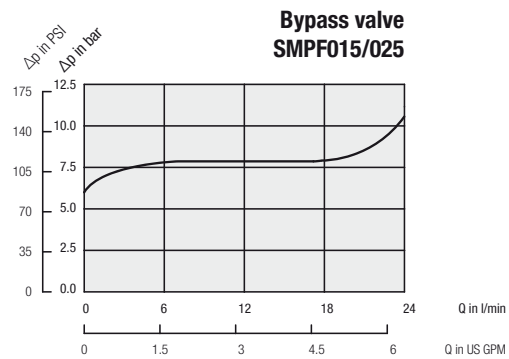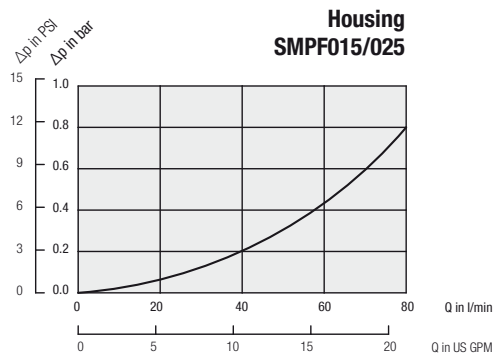

Return Line Filters ■ Type SRFL-S / D



Product Description

STAUFF Return Line Simplex Filters SRFL-S and Duplex Filters SRFL-D are designed for in-line hydraulic applications. With its compact construction and the easy to maintain assembly the SRFL-S and SRFL-D Filters are suitable for flow rates up to 7000 l/min / 1850 US GPM. The two housings of the Duplex Filter SRFL-D are connected with a special gate valve that is operated with a level or hand wheel. Therefore the filter may be serviced without shutting down the hydraulic system. A high efficiency of contaminant removal is assured by using STAUFF RE series Replacement Filter Elements. The high dirt-hold capacity of STAUFF Elements ensures a long service life and, as a result, reduced maintenance costs.

Technical Data

Construction

- In-line assembly, base mounted

Materials

- Filter housing: Carbon Steel
Stainless Steel (on request)
- Sealings: NBR (Buna-N®)
FPM (Viton®)
Other sealing materials on request

Port Connection

- DIN flange
- ANSI flange
- SAE flange

Operating Pressure

- Max. 14 bar / 200 PSI

Flow Rating

- Up to 7000 l/min / 1850 US GPM

Temperature Range

- -10 °C ... +100 °C / +14 °F ... +212 °F

Filter Elements

- Specifications see page C63

Media Compatibility

- Mineral oils, lubrication oils, other fluids on request




Options and Accessories

Valve

- Bypass valve: Opening pressure 3 bar ± 0,3 bar / 43.5 PSI ± 4.35 PSI
(integrated in the filter element) Other settings available on request

Clogging Indicators

- Differential pressure switch, setting 1,6 bar / 23 PSI
Other clogging indicators available on request



Filter Size	Flow l/min/ US GPM	Flange			Filter Element quantity		Arrangement of filter elements	Page
		DIN 2501	ANSI B 16.5	SAE 3000 PSI	SRFL-S	SRFL-D		
SRFL-S/D-160	900/240	DN 40	1-1/2	1-1/2	1x RE-160	2x RE-160		C52/C56
SRFL-S/D-200	900/240	DN 50	2	2	1x RE-200	2x RE-200		
SRFL-S/D-300	1400/370	DN 65	2-1/2	2-1/2	1x RE-300	2x RE-300		
SRFL-S/D-600	1400/370	DN 80	3	3	1x RE-600	2x RE-600		
SRFL-S/D-1200	4000/1050	DN 100	4	4	2x RE-600	4x RE-600		C54/C58
SRFL-S/D-1800	4000/1050	DN 125	5	5	3x RE-600	6x RE-600		
SRFL-S/D-2400	6000/1580	DN 150	6	6	4x RE-600	8x RE-600		
SRFL-S/D-3600	7000/1850	DN 200	8	8	6x RE-600	12x RE-600		C54/C60

Return Line Filters ■ Type SRFL-S 160 / 200 / 300 / 600

Detail arrangement of filter elements



SRFL-S 160 / 200 / 300 / 600

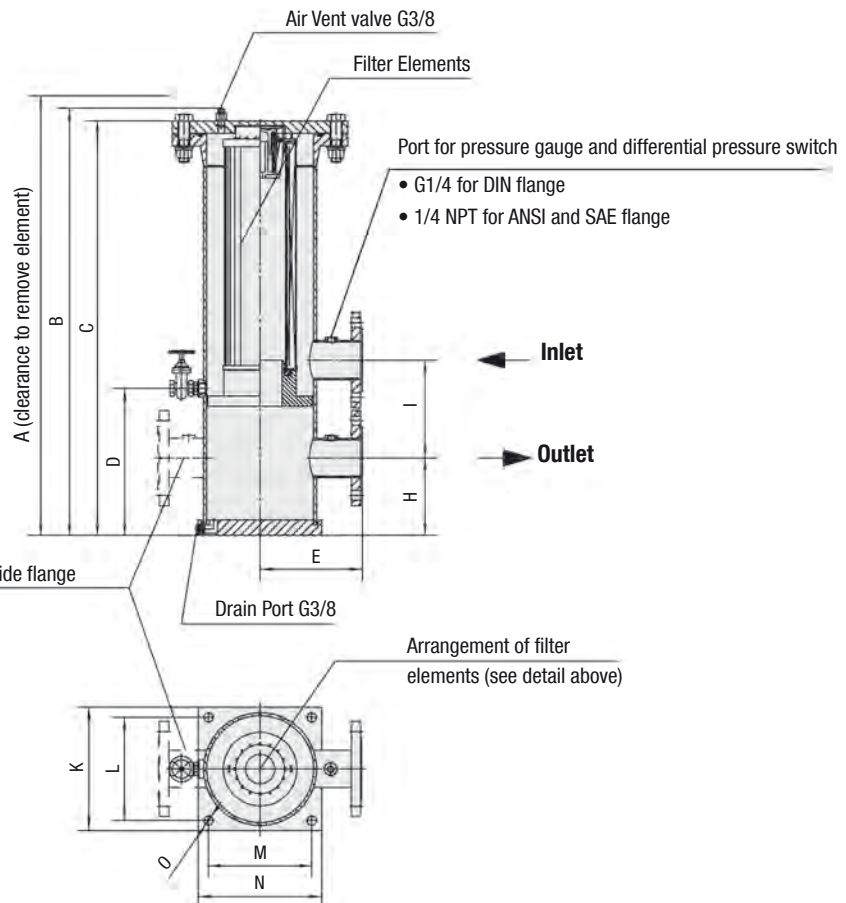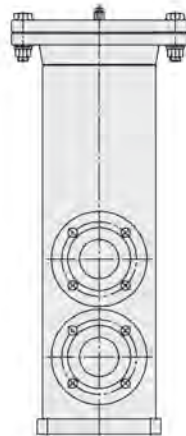

Option: Connection location


S (same side)



Inlet

Outlet

O (opposite side)



Inlet

Outlet

Return Line Filters ■ Type SRFL-S 160 / 200 / 300 / 600

Flange Connection	Filter Size SRFL-S			
	160	200	300	600
DIN	DN 40	DN 50	DN 65	DN 80
ANSI	1-1/2	2	2-1/2	3
SAE	1-1/2	2	2-1/2	3

Dimensions (mm/in)	Filter Size SRFL-S			
	160	200	300	600
A	885,8	1045,8	1248,7	2126,7
	34.87	41.17	49.16	83.73
B	607,6	688,7	828,6	1267,6
	23.92	27.12	32.63	49.91
C	584	664	803,9	1242,9
	22.99	26.14	31.65	48.93
D	214	214	285	285
	8.43	8.43	11.22	11.22
E	148	148	198	198
	5.83	5.83	7.80	7.80
H	130	140	150	160
	5.12	5.51	5.91	6.30
I	155	190	190	220
	6.10	7.48	7.48	8.66
K	150	150	240	240
	5.91	5.91	9.45	9.45
L	125	125	200	200
	4.92	4.92	7.87	7.87
M	125	125	200	200
	4.92	4.92	7.87	7.87
N	150	150	240	240
	5.91	5.91	9.45	9.45
O	11	11	18	18
	.43	.43	.71	.71
Total Oil Capacity (l/gal)	6,0	7,1	22,2	37,1
	1.59	1.86	5.87	9.80
Weight (kg/lbs)	14,5	15,9	29	34,5
	32	35	64	76
Filter Elements	Designation	RE-160 ...	RE-200 ...	RE-300 ...
	Quantity	1 x 1	1 x 1	1 x 1

Return Line Filters ■ Type SRFL-S 1200 / 1800 / 2400 / 3600

Detail arrangement of filter elements



SRFL-S 1200




SRFL-S 1800



SRFL-S 2400




SRFL-S 3600

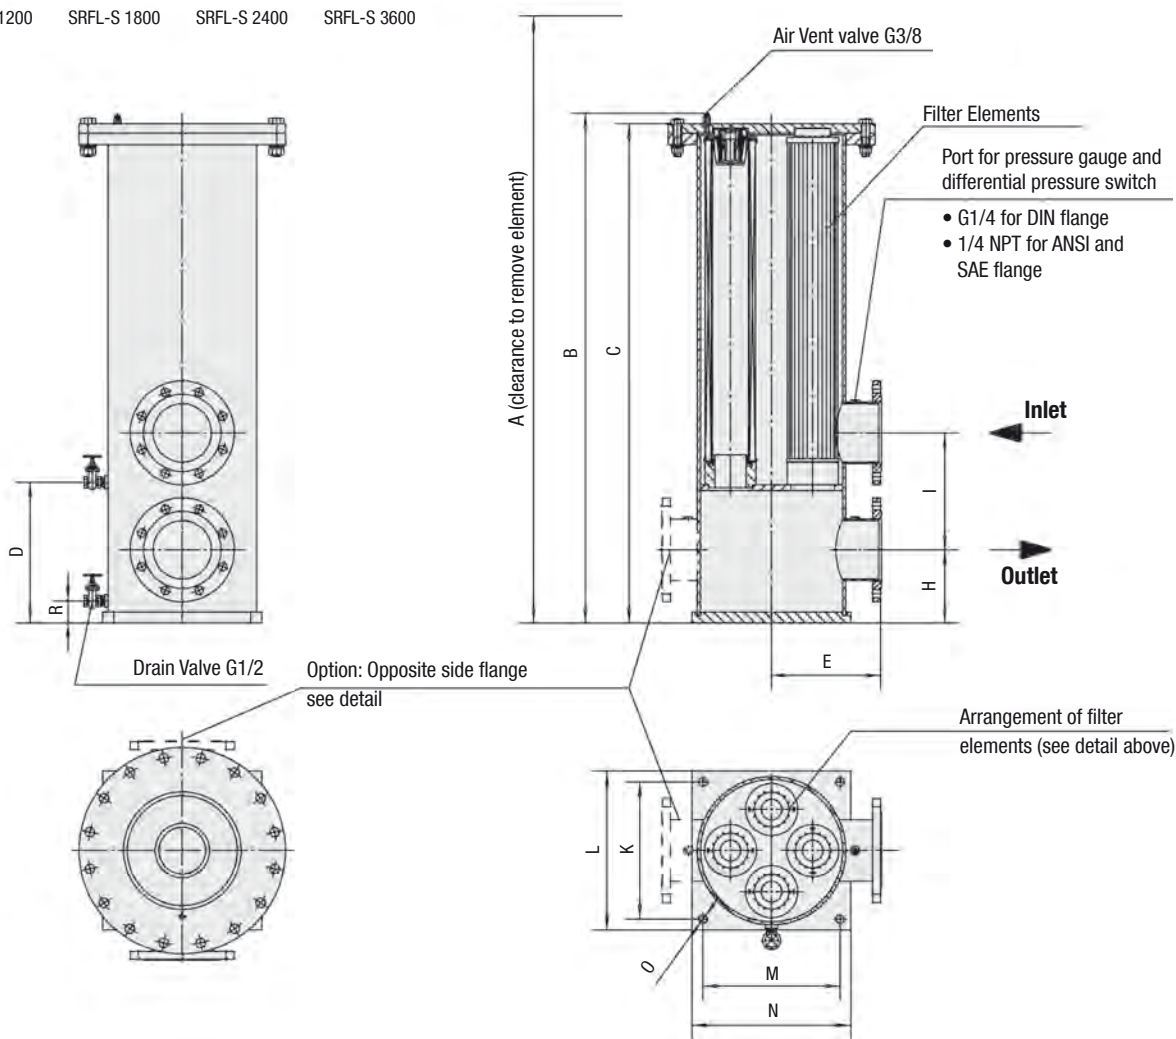


Option: Connection location

S (same side)



O (opposite side)



Return Line Filters ■ Type SRFL-S 1200 / 1800 / 2400 / 3600

Flange Connection	Filter Size SRFL-S			
	1200	1800	2400	3600
DIN	DN 100	DN 125	DN 150	DN 200
ANSI	4	5	6	8
SAE	4	5	6	8

Dimensions (mm/in)	Filter Size SRFL-S			
	1200	1800	2400	3600
A	2176,7	2176,7	2249,1	2249,1
	85.70	85.70	88.55	88.55
B	1319,6	1323,6	1394,8	1392,8
	51.96	52.11	54.92	54.84
C	1294,6	1294,9	1366,1	1368,1
	50.98	50.98	53.78	53.86
D	275	275	325	325
	10.83	10.83	12.80	12.80
E	273	273	298	398
	10.75	10.75	11.73	15.67
H	190	190	200	252
	7.48	7.48	7.87	9.92
I	250	280	320	425
	9.84	11.02	12.6	16.73
K	385	385	435	540
	15.16	15.16	17.13	21.26
L	325	325	375	480
	12.80	12.80	14.76	18.90
M	325	325	375	480
	12.80	12.80	14.76	18.90
N	385	385	435	540
	15.16	15.16	17.13	21.26
O	23	23	23	23
	.91	.91	.91	.91
R	60	60	60	60
	2.36	2.36	2.36	2.36
Total Oil Capacity (l/gal)	103	103	149	232
	27.21	27.21	39.37	61.30
Weight (kg/lbs)	86,2	90,7	105,2	154,2
	190	200	232	340
Filter Elements	Designation	RE-600 ...	RE-600 ...	RE-600 ...
	Quantity	1 x 2	1 x 3	1 x 4


Return Line Filters ■ Type SRFL-D 160 / 200 / 300 / 600

Detail arrangement of filter elements




SRFL-D 160 / 200 / 300 / 600


Detail connecting ports




Flange 1-1/2, 2, 2-1/2



Flange 3

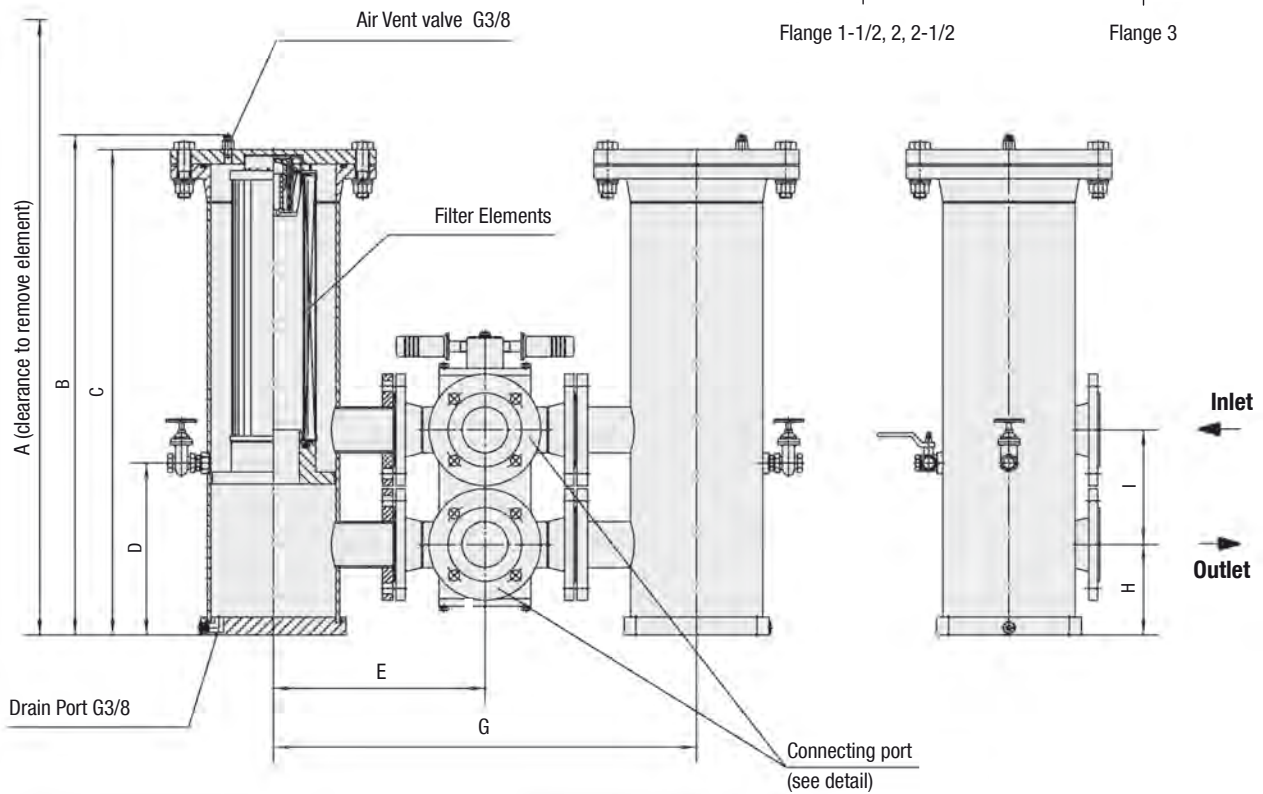

Arrangement of filter elements (see detail above)

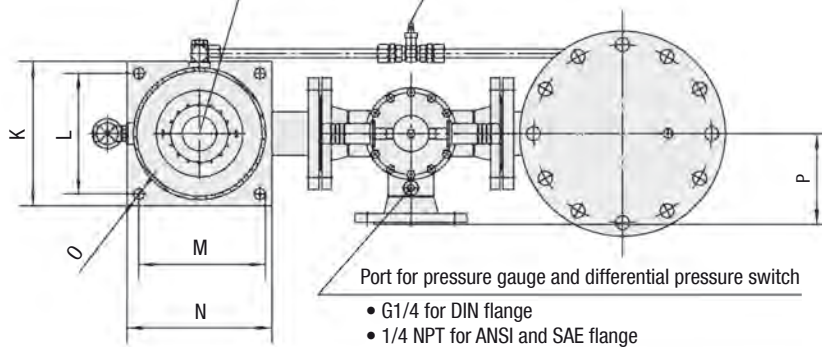Pressure tap
Balance line 1/2"


Return Line Filters ■ Type SRFL-D 160 / 200 / 300 / 600

Flange Connection	Filter Size SRFL-D			
	160	200	300	600
DIN	DN 40	DN 50	DN 65	DN 80
ANSI	1-1/2	2	2-1/2	3


Dimensions (mm/in)	Filter Size SRFL-D			
	160	200	300	600
A	885,8	1045,8	1248,7	2126,7
	34.87	41.17	49.16	83.73
B	607,6	688,7	828,6	1267,6
	23.92	27.12	32.63	49.91
C	584	642	803,9	1242,9
	22.99	25.28	31.65	48.93
D	214	214	285	285
	8.43	8.43	11.22	11.22
E	260	300	350	375
	10.24	11.81	13.78	14.76
G	520	600	700	750
	20.47	23.62	27.56	29.53
H	130	140	150	160
	5.12	5.51	5.91	6.30
I	155	190	190	220
	6.10	7.48	7.48	8.66
K	150	150	240	240
	5.91	5.91	9.45	9.45
L	125	125	200	200
	4.92	4.92	7.87	7.87
M	125	125	200	200
	4.92	4.92	7.87	7.87
N	150	150	240	240
	5.91	5.91	9.45	9.45
O	11	11	18	18
	.43	.43	.71	.71
P	110	150	150	175
	4.33	5.91	5.91	6.89
Total Oil Capacity (l/gal)	6	7,1	22,2	37,1
	1.59	1.86	5.87	9.80
Weight (kg/lbs)	43	56,7	84	104
	95	125	185	230
Filter Elements	Designation	RE-160 ...	RE-200 ...	RE-300 ...
	Quantity	2 x 1	2 x 1	2 x 1

Return Line Filters ■ Type SRFL-D 1200 / 1800 / 2400

Detail arrangement of filter elements

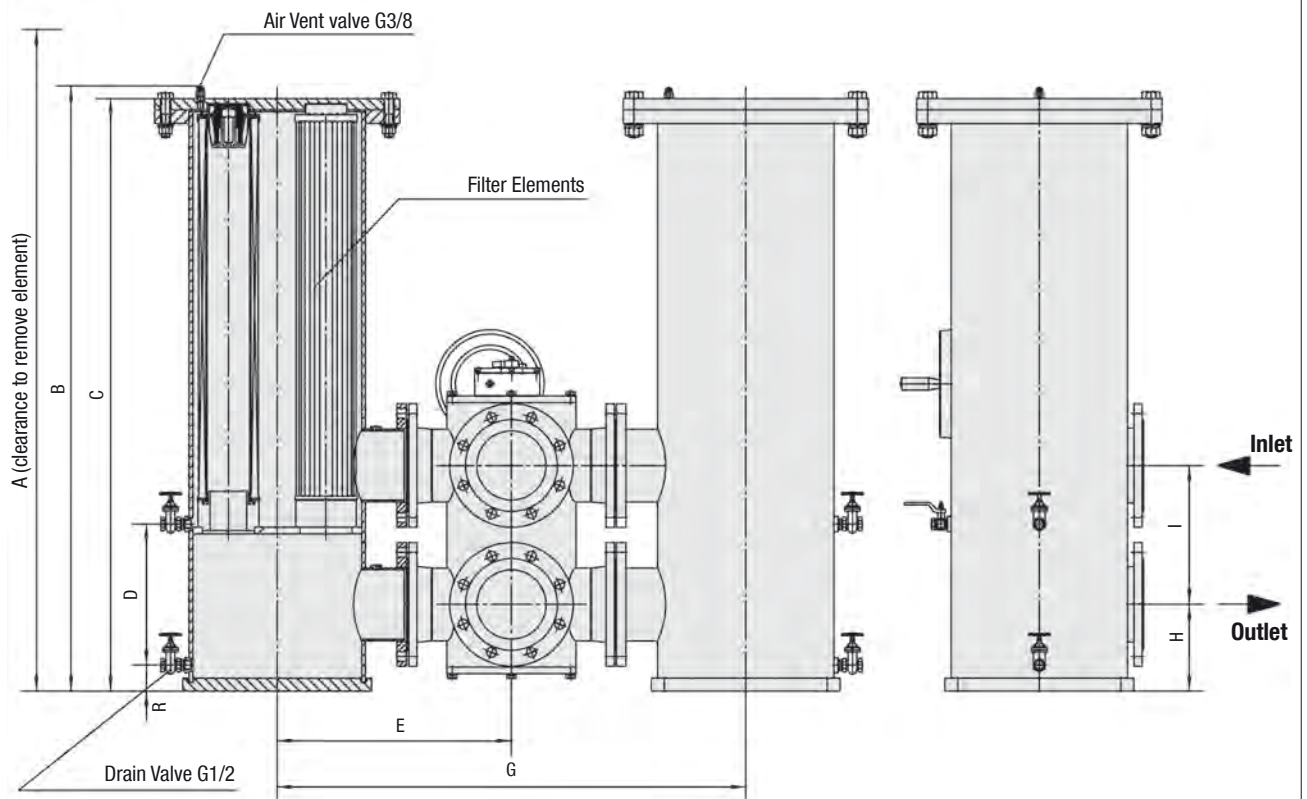

Arrangement of filter elements (see detail above)

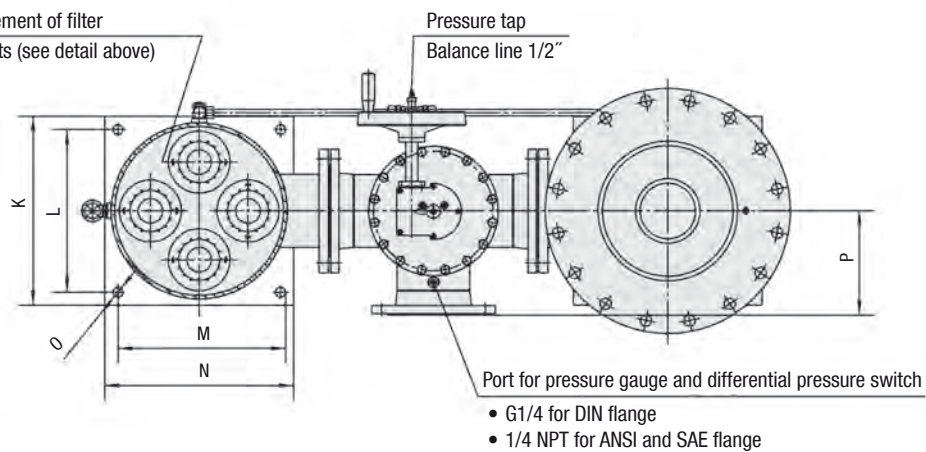

Return Line Filters ■ Type SRFL-D 1200 / 1800 / 2400

Flange Connection	Filter Size SRFL-D		
	1200	1800	2400
DIN	DN 100	DN 125	DN 150
ANSI	4	5	6


Dimensions (mm/in)	Filter Size SRFL-D		
	1200	1800	2400
A	2176,7	2176,7	2249,1
	85.70	85.70	88.55
B	1319,6	1323,6	1394,8
	51.96	52.11	54.92
C	1294,9	1294,9	1366,1
	50.98	50.98	53.78
D	275	275	325
	10.83	10.83	12.80
E	475	500	540
	18.70	19.69	21.26
G	950	1000	1080
	37.40	39.37	42.52
H	190	190	200
	7.48	7.48	7.87
I	250	280	320
	9.84	11.02	12.60
K	385	385	435
	15.16	15.16	17.13
L	325	325	375
	12.80	12.80	14.76
M	325	325	375
	12.80	12.80	14.76
N	385	385	435
	15.16	15.16	17.13
O	23	23	23
	.91	.91	.91
P	200	225	240
	7.87	8.86	9.45
R	60	60	60
	2.36	2.36	2.36
Total Oil Capacity (l/gal)	103	103	149
	27.20	27.20	39.30
Weight (kg/lbs)	215	233	263
	475	515	580
Filter Elements	Designation	RE-600 ...	RE-600 ...
	Quantity	2 x 2	2 x 4

Return Line Filters ■ Type SRFL-D 3600

Detail arrangement of filter elements




SRFL-D 3600

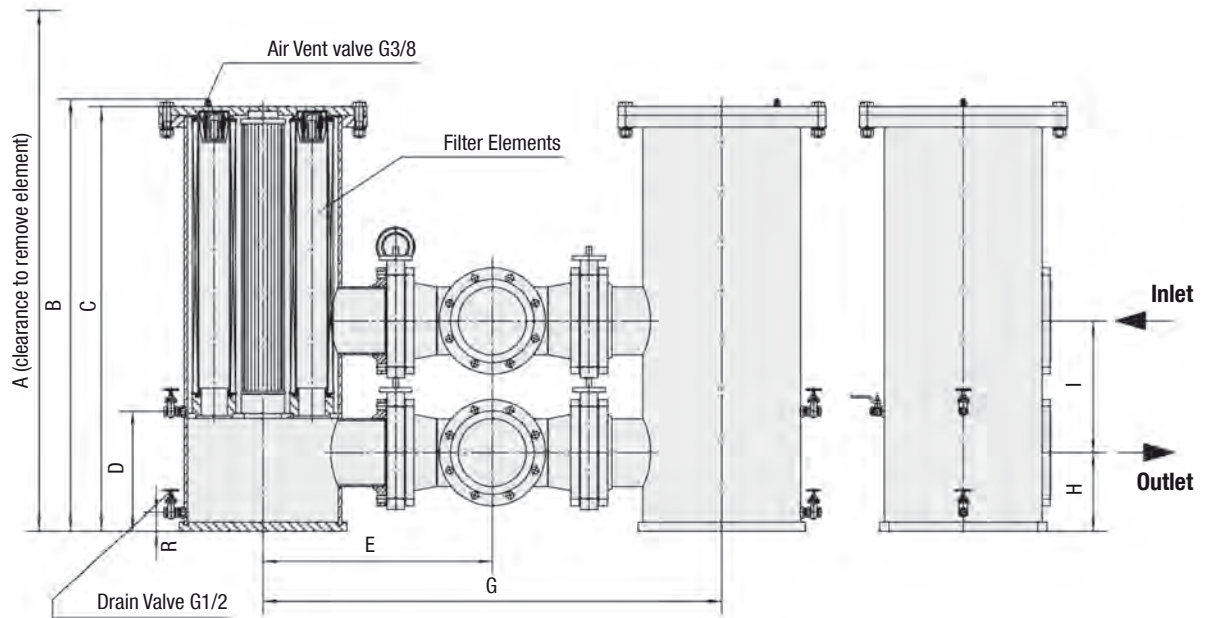

Arrangement of filter elements (see detail above)

Pressure tap
Balance line 1/2"

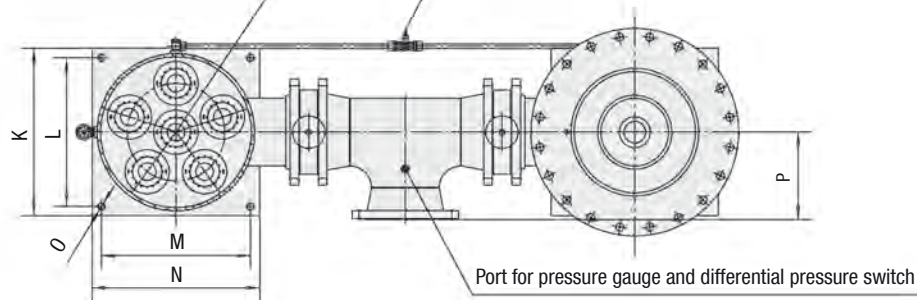

Port for pressure gauge and differential pressure switch

- G1/4 for DIN flange
- 1/4 NPT for ANSI and SAE flange

Return Line Filters ■ Type SRFL-D 3600

Flange Connection	Filter Size SRFL-D
	3600
DIN	DN 200
ANSI	8

Dimensions (mm/in)	Filter Size SRFL-D
	3600
A	2249,1 88.55
B	1392,8 54.84
C	1368,1 53.86
D	325 12.80
E	739 29.11
G	1479 58.22
H	252 9.92
I	425 16.73
K	540 21.26
L	480 18.90
M	480 18.90
N	540 21.26
O	23 .91
P	281,4 11.08
R	60 2.36
Total Oil Capacity (l/gal)	233 61.3
Weight (kg/lbs)	390 860
Filter Elements	Designation
	Quantity
	RE-600 ... 2 x 6

Return Line Filter Housings / Complete Filters ■ Type SRFL-S / D

SRFL - D - 160 B / A / 0 / CS / D / X

1

2

3

4

5

6

7

8

9

10

1 Type

Return Line Simplex Housing	SRFL-S
Return Line Duplex Housing	SRFL-D

2 Group

Flow	Size
900 l/min / 240 US GPM	160
900 l/min / 240 US GPM	200
1400 l/min / 370 US GPM	300
1400 l/min / 370 US GPM	600
4000 l/min / 1050 US GPM	1200
4000 l/min / 1050 US GPM	1800
6000 l/min / 1580 US GPM	2400
7000 l/min / 1850 US GPM	3600

3 Filter Material

Material	Max. Δp*collapse	Micron ratings available	Code
Without filter element	-	-	...
Inorg. glass fibre	25 bar / 363 PSI	3, 5, 10, 20	G
Stainless fibre	30 bar / 435 PSI		A
Filter paper	10 bar / 145 PSI	10, 20	N
Stainless mesh	30 bar / 435 PSI	25, 50, 100, 200	S

* Note: Collapse/burst resistance as per ISO 2941.
Other materials on request.

4 Micron Rating

3 µm	03
5 µm	05
10 µm	10
20 µm	20
25 µm	25
50 µm	50
100 µm	100
200 µm	200

Note: Other micron ratings on request.

5 Sealing Material

NBR (Buna®)	B
FPM (Viton®)	V

Note: Other sealing materials on request.

6 Connection Style

Connection Style	Group								Code
	160	200	300	600	1200	1800	2400	3600	
DIN Flange	DN 40	DN 50	DN 65	DN 80	DN 100	DN 125	DN 150	DN 200	D
ANSI Flange	1-1/2	2	2-1/2	3	4	5	6	8	A
SAE Flange	1-1/2	2	2-1/2	3	4	5	6	8	S

Note: SAE flange is not available for SRFL-D.

7 Connection Location

Opposite side*	0
----------------	----------

Same side	S
-----------	----------

* Note: Omit for SRFL-D series

8 Housing Material

Carbon Steel	CS
Stainless Steel	SS

9 Clogging Indicator

Without Clogging Indicator	0
----------------------------	----------

Differential Pressure Switch with Visual Gauge Indicator	D
---	----------

Note: Other indicators on request.

10 Design Code

Only for information	X
----------------------	----------

Filter Elements ■ Type RE

RE - 160 G 10 B / X

1

2

3

4

5

6

1 Type

Filter Element Series	RE
-----------------------	-----------

2 Group

Designation	Filter Element Quantity		Size
	SRFL-S	SRFL-D	
RE-160	1x1	2x1	160
RE-200	1x1	2x1	200
RE-300	1x1	2x1	300
RE-600	1x1	2x1	600
RE-600	1x2	2x2	1200
RE-600	1x3	2x3	1800
RE-600	1x4	2x4	2400
RE-600	1x6	2x6	3600

3 Filter Material

Material	Max. Δp*collapse	Micron ratings available	Code
Inorg. glass fibre	25 bar / 363 PSI	3, 5, 10, 20	G
Stainless fibre	30 bar / 435 PSI		A
Filter paper	10 bar / 145 PSI	10, 20	N
Stainless mesh	30 bar / 435 PSI	25, 50, 100, 200	S

* Note: Collapse/burst resistance as per ISO 2941.
Other materials on request.

4 Micron Rating

3 µm	03
5 µm	05
10 µm	10
20 µm	20
25 µm	25
50 µm	50
100 µm	100
200 µm	200

Note: Other micron ratings on request.

5 Sealing Material

NBR (Buna®)	B
FPM (Viton®)	V

Note: Other sealing materials on request

6 Design Code

Only for information	X
----------------------	----------

Return Line Filters ■ Type SRFL-S / D

Filter Elements and Clogging Indicator

Product Description

STAUFF Replacement Filter Elements for SRFL-S and SRFL-D Series Filters are manufactured in the common filter materials such as Stainless Fibre, Stainless Mesh, Cellulose and Inorganic Glass Fibre. As standard all Replacement Elements series RE have tin plated steel parts for use with aggressive media such as water glycol, upon request you also can get other materials. All Replacement Elements made by STAUFF comply with quality specifications in accordance with international standards.



Order Code

RE - 160 G 10 B / X

1 2 3 4 5 6

1 Type

Filter Element Series **RE**

2 Group

According to filter housing
Note: See order code page C62.

3 Filter Material

Material	Max. Δp*collapse	Micron ratings available	Code
Inorg. glass fibre	25 bar / 363 PSI	3, 5, 10, 20	G
Stainless fibre	30 bar / 435 PSI		A
Filter paper	10 bar / 145 PSI	10, 20	N
Stainless mesh	30 bar / 435 PSI	25, 50, 100, 200	S

* Note: Collapse/burst resistance as per ISO 2941.
Other materials on request.

4 Micron Rating

3 µm	03
5 µm	05
10 µm	10
20 µm	20
25 µm	25
50 µm	50
100 µm	100
200 µm	200

Note: Other micron ratings on request.

5 Sealing Material

NBR (Buna®) **B**
FPM (Viton®) **V**
Note: Other sealing materials on request.

6 Design Code

Only for information **X**

Differential Pressure Switch with Visual Gauge Indicator

The switch is used to indicate when the elements need changing. The switch can turn on a light, shut down the machine or any further function controlled by an electrical signal. The gauge visually indicates the differential pressure across the filter elements.



Diameter

- 100 mm / 3.94 in

Scale

- 0 ... 1,6 kg/cm²

Connection Thread

- G1/4

Operating Pressure

- Max. 200 bar / 2900 PSI

Temperature Range

- 20 °C ... +80 °C / -4 °F ... +176 °F

Materials

- Body: Aluminium
- Lens: Glass
- Sealing Material: NBR (Buna-N®)
FPM (Viton®)

Protection Rating

- IP 65: Dust tight and protected against water jets.

Switch Voltage

- Max. 28 V AC/DC

Current On Contact













- Max. 0,25 A

Contact Rating

- 5 VA AC/DC

Return Line Filters ■ Type SRFL-S / D Flow Characteristics

The following characteristics are valid for mineral oils with a density of 0,85 kg/dm³ and the kinematic viscosity of 30 mm²/s (30cSt). The characteristics have been determined in accordance to ISO 3968. Multipass filter ratings have been obtained in accordance to ISO 16889. The housing pressure drop is directly proportional to the oil density. Consult STAUFF for details.

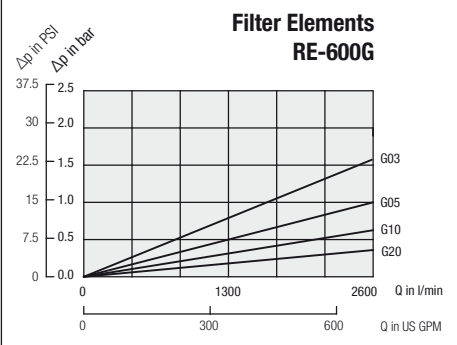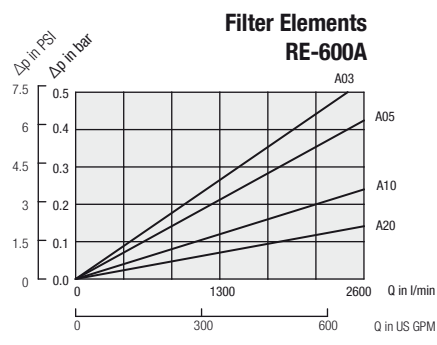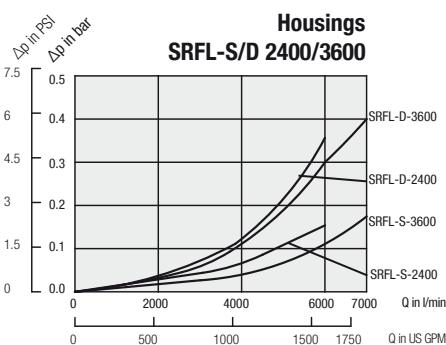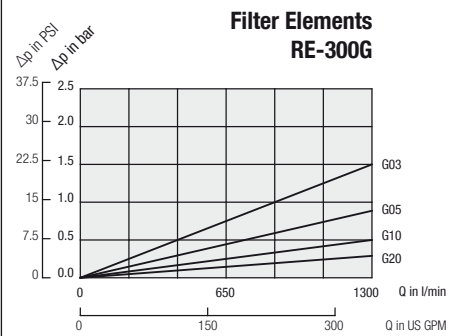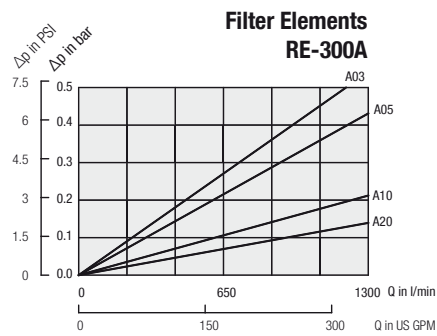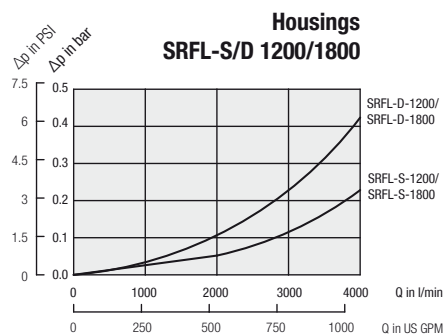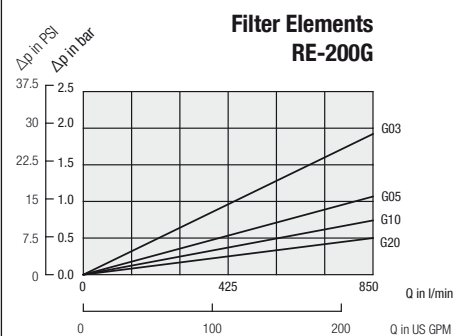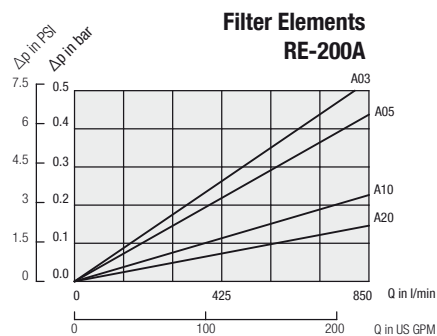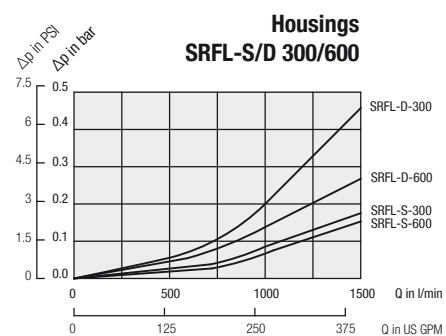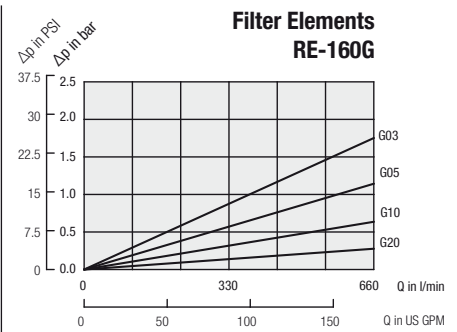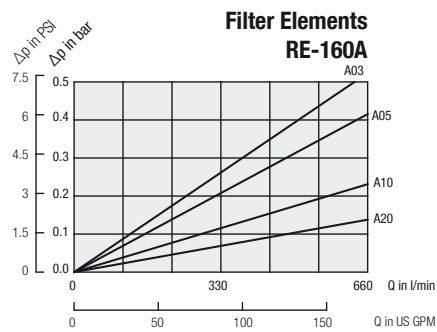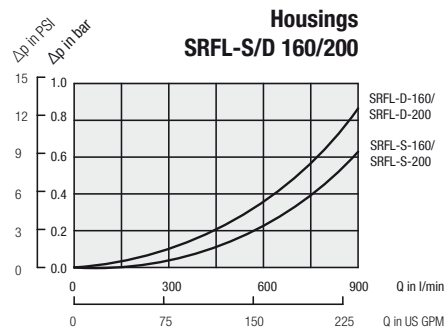

Pressure drop of housing including filter elements

General: $\Delta p_{\text{total}} = \Delta p_{\text{hous}} + \Delta p_{\text{Elem}} \times (\text{operating viscosity [mm}^2\text{/s]} / 30\text{mm}^2\text{/s})$


with Δp_{hous} = See diagrams above

Δp_{Elem} = pressure drop of element at a flow Q/n (at a viscosity of 30 mm²/s and n = numbers of elements as listed in ordering code filter elements see page C62 and diagrams above.)

Example

Data given $Q_{\text{max}} = 6000 \text{ l/min} / 1585 \text{ US GPM}$, SRFL-D-2400 with filter elements RE-600S25B;
operating viscosity = 100 mm²/s
 $Q_{\text{max}} = 6000 \text{ l/min}$; n=4 elements (SRFL-D-2400) $Q/n = 1500 \text{ l/min} / 396 \text{ gal}$
 $\Delta p_{\text{hous}} = 0,35 \text{ bar} / 5,07 \text{ PSI}$, $\Delta p_{\text{Elem}} = 0,03 \text{ bar} / 0,44 \text{ PSI}$

Pressure drop: $\Delta p_{\text{total}} = 0,35 \text{ bar} + 0,03 \text{ bar} \times (100 \text{ mm}^2\text{/s} / 30\text{mm}^2\text{/s})$
= 0,45 bar / 6,53 PSI

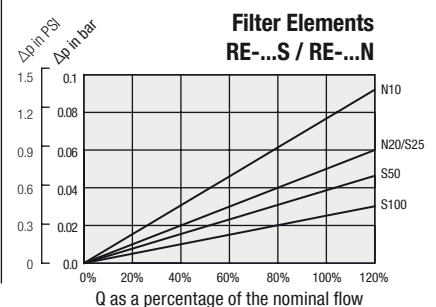

Return Line Filters ■ Type SRFL-SW



Product Description

STAUFF Return Line Filters SRFL-SW are specially developed for direct installation into the pipelines of industrial water cycles. Depending on their size, SRFL-SW filter housings are suitable for nominal flow rates up to 13330 l/min / 3521 US GPM at a maximum operating pressure of 16 bar / 232 PSI. The SRFL-SW have been designed to be used in the steel industry for pre-filtering or coarse filtering in descaling plants. For use with demineralised water we recommend the Return Line Filters SRFL-SW in Stainless Steel. The filter element construction as a Stainless Steel basket screen filter ensures a long service life.

Technical Data

Construction

- Designed for direct installation into pipelines
- Simplex version

Materials

- Filter housing: Carbon Steel
Stainless Steel (on request)
- Sealing: PTFE / NBR (Buna-N®)
PTFE / FKM (Viton®)

Port Connection

- ANSI or DIN flange

Operating Pressure

- Max. 16 bar / 232 PSI

Flow Rating

- Max. 13330 l/min / 3521 US GPM

Temperature Range

- -10 °C ... +100 °C / +14 °F ... +212 °F

Media Compatibility

- Water
- Coolant
- Others on request

Options and Accessories

Filter Elements

Stainless Steel basket screen filters from STAUFF's REL product line are used as filter elements, which are designed for flow from the inside to the outside. The filter elements are available in micron ratings between 50 µm and 200 µm. Solid particles collected in the basket are prevented from reaching the clean side of the water cycle when being replaced.

Clogging Indicator

- Differential Pressure Gauge



Drain Valve

- Available as an option: Integrated into the filter housing


Return Line Filters ■ Type SRFL-SW-160 /-300 /-600

Version with handle


* recommended space for element change

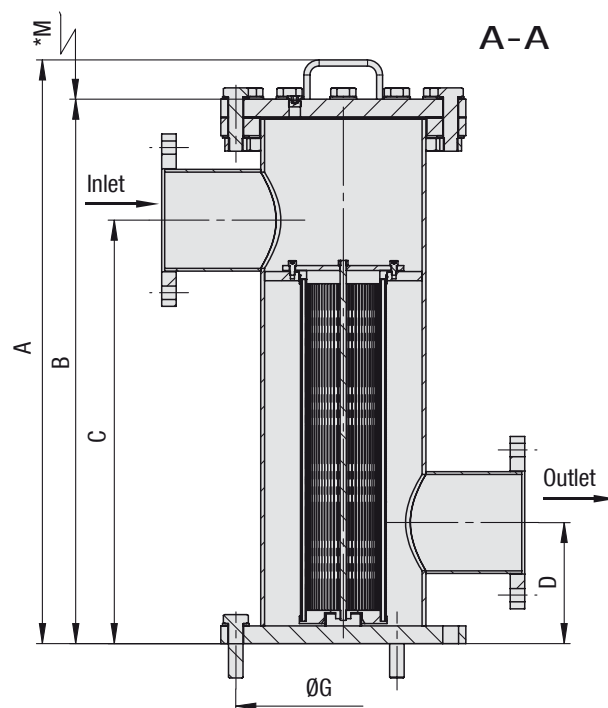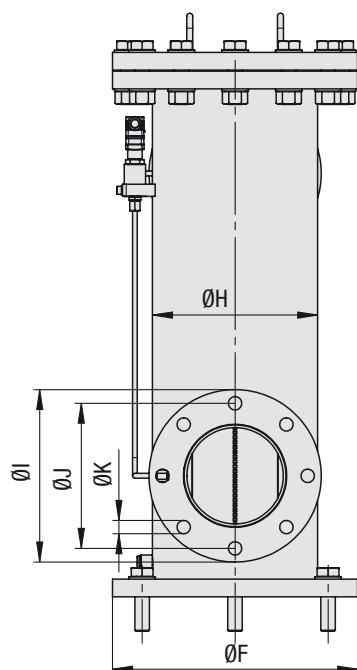

Detail arrangement of filter elements



Flange Connection	Filter Size SRFL-SW		
	160	300	600
DIN	DN80	DN100	DN150
	DN50	DN125	-
ANSI	2	4	6
	3	5	-


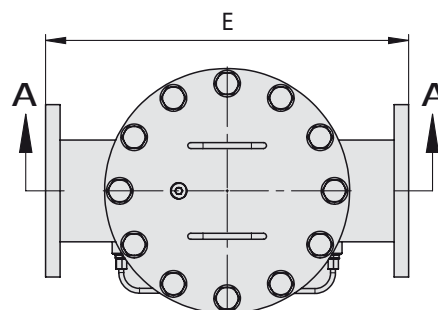


Dimensions (mm/in)		Filter Size SRFL-SW		
		160	300	600
Filter Housing Material		CS/SS	CS/SS	CS/SS
A		840	965	965
		33.07	38.00	38.00
B		775	900	900
		30.51	35.43	35.43
C		600	700	700
		23.62	27.56	27.56
D		250	200	200
		9.84	7.87	7.87
E		440	500	600
		17.32	19.69	23.62
ØF		340	340	405
		13.39	13.39	15.94
ØG		295	295	355
		11.61	11.61	13.98
ØH		219,1	219,1	273
		8.63	8.63	10.75
ØI		200	220	285
		7.87	8.66	11.22
ØJ		160	180	240
		6.30	7.09	9.45
ØK		18	18	22
		.71	.71	.87
M		400	650	650
		15.75	25.60	25.60
Housing Capacity (l / US gal)		26,2	31,3	52,9
		6.9	8.3	14
Filter Elements	Designation	REL-100	REL-100	REL-150
	Quantity	1	1	1

Return Line Filters ■ Type SRFL-SW-850 /-1000 /-1250

Version with lifting device

* recommended space for element change

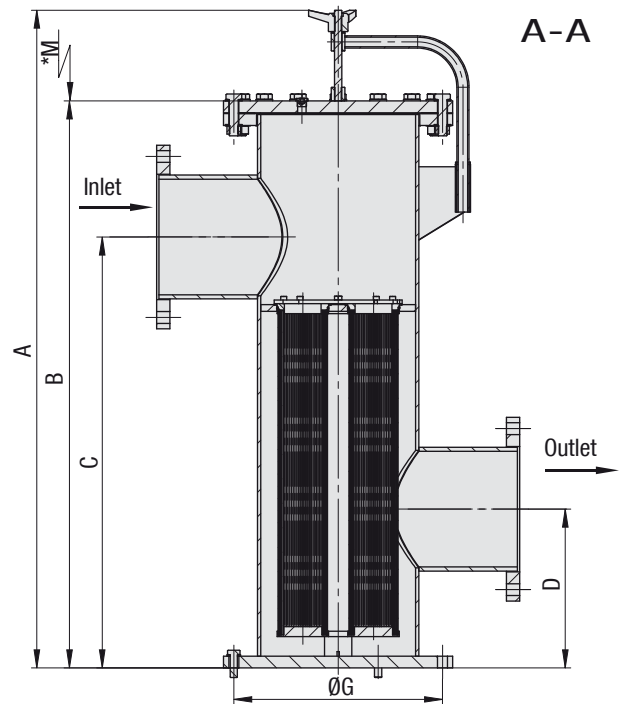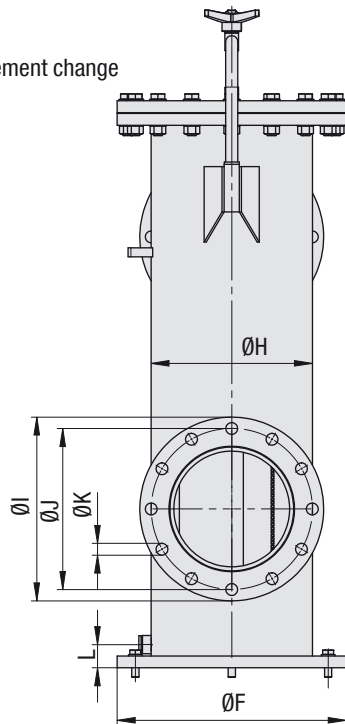

Detail arrangement for filter elements




SRFL-SW-850

SRFL-SW-1000

SRFL-SW-1250

Flange Connection	Filter Size SRFL-SW		
	850	1000	1250
DIN	DN200	DN250	DN300
	DN150	-	-
ANSI	8	10	12
	-	-	-

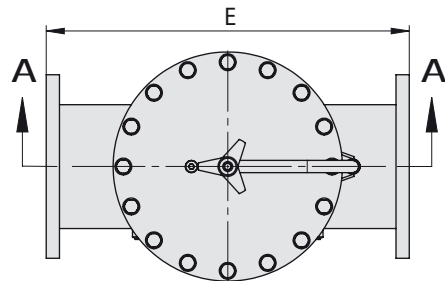

Dimensions (mm/in)		Filter Size SRFL-SW			
		850		1000	
Filter Housing Material		CS	SS	CS	SS
A		1154	1150	1442	1450
		45.43	45.28	56.77	57.09
B		962	950	1250	1250
		37.87	37.40	49.21	49.21
C		750	750	950	950
		29.53	29.53	37.40	37.40
D		300	300	350	350
		11.81	11.81	13.78	13.78
E		700	700	800	800
		27.56	27.56	31.50	31.50
ØF		520	505	520	505
		20.47	19.88	20.47	19.88
ØG		470	460	470	460
		18.50	18.11	18.50	18.11
ØH		355,6	355,6	355,6	355,6
		14.00	14.00	14.00	14.00
ØI		340	340	405	405
		13.39	13.39	15.94	15.94
ØJ		295	295	355	355
		11.61	11.61	13.98	13.98
ØK		22	22	26	26
		.87	.87	1.02	1.02
M		650	650	850	850
		25.59	25.59	33.46	33.46
L		55	51	55	51
		2.17	2.01	2.17	2.01
Housing Capacity (l / US gal)		96,5	96,5	138,6	138,6
		25.5	25.5	36.6	36.6
Filter Elements	Designation	REL-150	REL-150	REL-250	REL-250
	Quantity	2	2	3	3

Return Line Filter Housing / Complete Filters ■ Type SRFL-SW

SRFL-SW - 300 ... B / A / 0 / CS / 0 / B / X

1 2 3 4 5 6 7 8 9 10 11

1 Type

Return Line Filter Simplex Water **SRFL-SW**

2 Group

Flow	Size
650 l/min / 160 US GPM	160
1200 l/min / 300 US GPM	300
2500 l/min / 600 US GPM	600
6000 l/min / 1500 US GPM	850
8300 l/min / 2000 US GPM	1000
13330 l/min / 3300 US GPM	1250

3 Filter Material

Material	Micron Ratings Available	Code
Without filter element	-	...
Stainless mesh	50, 80, 100, 125, 200	B

4 Micron Rating

50 µm	50
80 µm	80
100 µm	100
125 µm	125
200 µm	200

Note: Other micron ratings on request.

5 Sealing Material

PTFE / NBR (Buna®)	B
PTFE / FPM (Viton®)	V

Note: Other sealing materials on request.

9 Clogging Indicator

Without Clogging Indicator	0
Differential Pressure Gauge	M

Note: Other clogging indicators on request.

6 Connection Style

Connection Style	Group						Code
	160	300	600	850	1000	1250	
DIN flange	DN80	DN100	DN150	DN200	DN250	DN300	D
	DN50	DN125	-	DN150	-	-	D1
ANSI flange	2"	4"	6"	8"	10"	12"	A
	3"	5"	-	-	-	-	A1

7 Connection Location

Opposite side	0
---------------	----------

10 Drain Valve

Closed	0
Ball Valve	B

8 Housing Material

Carbon Steel	CS
Stainless Steel	SS

11 Design Code

Only for information	X
----------------------	----------

Filter Elements ■ Type REL

REL - 150 B 200 B / X

1 2 3 4 5 6

1 Type

Filter Element Series **REL**

2 Group

Designation	Number of Filter Elements	Size
REL-100	1	160
REL-150	1	300
REL-150	1	600
REL-150	2	850
REL-250	3	1000
REL-250	5	1250

3 Filter Material

Material	Max. Δp*Collapse	Micron Ratings Available	Code
Stainless mesh	10 bar / 145 PSI	50, 80, 100, 125, 200	B

4 Micron Rating

50 µm	50
80 µm	80
100 µm	100
125 µm	125
200 µm	200

5 Sealing Material

NBR (Buna®)	B
FPM (Viton®)	V

6 Design Code

Only for information	X
----------------------	----------

Replacement Filter Elements ■ Type REL

Product Description

Stainless Steel basket screen filters from STAUFF's REL product line are used as filter elements, which are designed for flow from the inside to the outside. Micron ratings ranging from 50 µm to 200 µm are available. Solid particles collected in the basket are prevented from reaching the clean side of the water cycle when being replaced. The filter element construction as a Stainless Steel basket screen filter ensures a long service life.



Order Code

REL - 150 B 200 B / X

1 2 3 4 5 6

1 Type

Filter Element Series **REL**

2 Group

Designation	Number of Filter Elements	Size
REL-100	1	160
REL-150	1	300
REL-150	1	600
REL-150	2	850
REL-250	3	1000
REL-250	5	1250

3 Filter Material

Material	Max. Δp^* Collapse	Micron Ratings Available	Code
Stainless mesh	10 bar / 145 PSI	50, 80, 100, 125, 200	B

4 Micron Rating

50 µm	50
80 µm	80
100 µm	100
125 µm	125
200 µm	200

5 Sealing Material

NBR (Buna®) **B**
FPM (Viton®) **V**

6 Design Code

Only for information **X**

Differential Pressure Gauge

A visual clogging indicator, the function of which is based on the differential pressure between the contaminated and clean side of the filter elements, is available as an option, and enable a convenient determination of the condition of the basket filter.

Nominal Size

▪ 80 mm / 3.15 in

Range of Scale

▪ 0 ... 1 bar / 0 ... 14.5 PSI

Operating Pressure

▪ Max. 100 bar / 1450 PSI

Permissible Temperatures

▪ Ambient: 0 ... +60 °C / 0 ... +140 °F
▪ Media: up to +100 °C / +212 °F


Material

▪ Housing: Die-cast Aluminum, black
▪ Sight glass: Acrylic
▪ Indicator: Aluminum, black


Protection Rating

▪ IP 54 protection rating: Dust protected and protected against splashing water



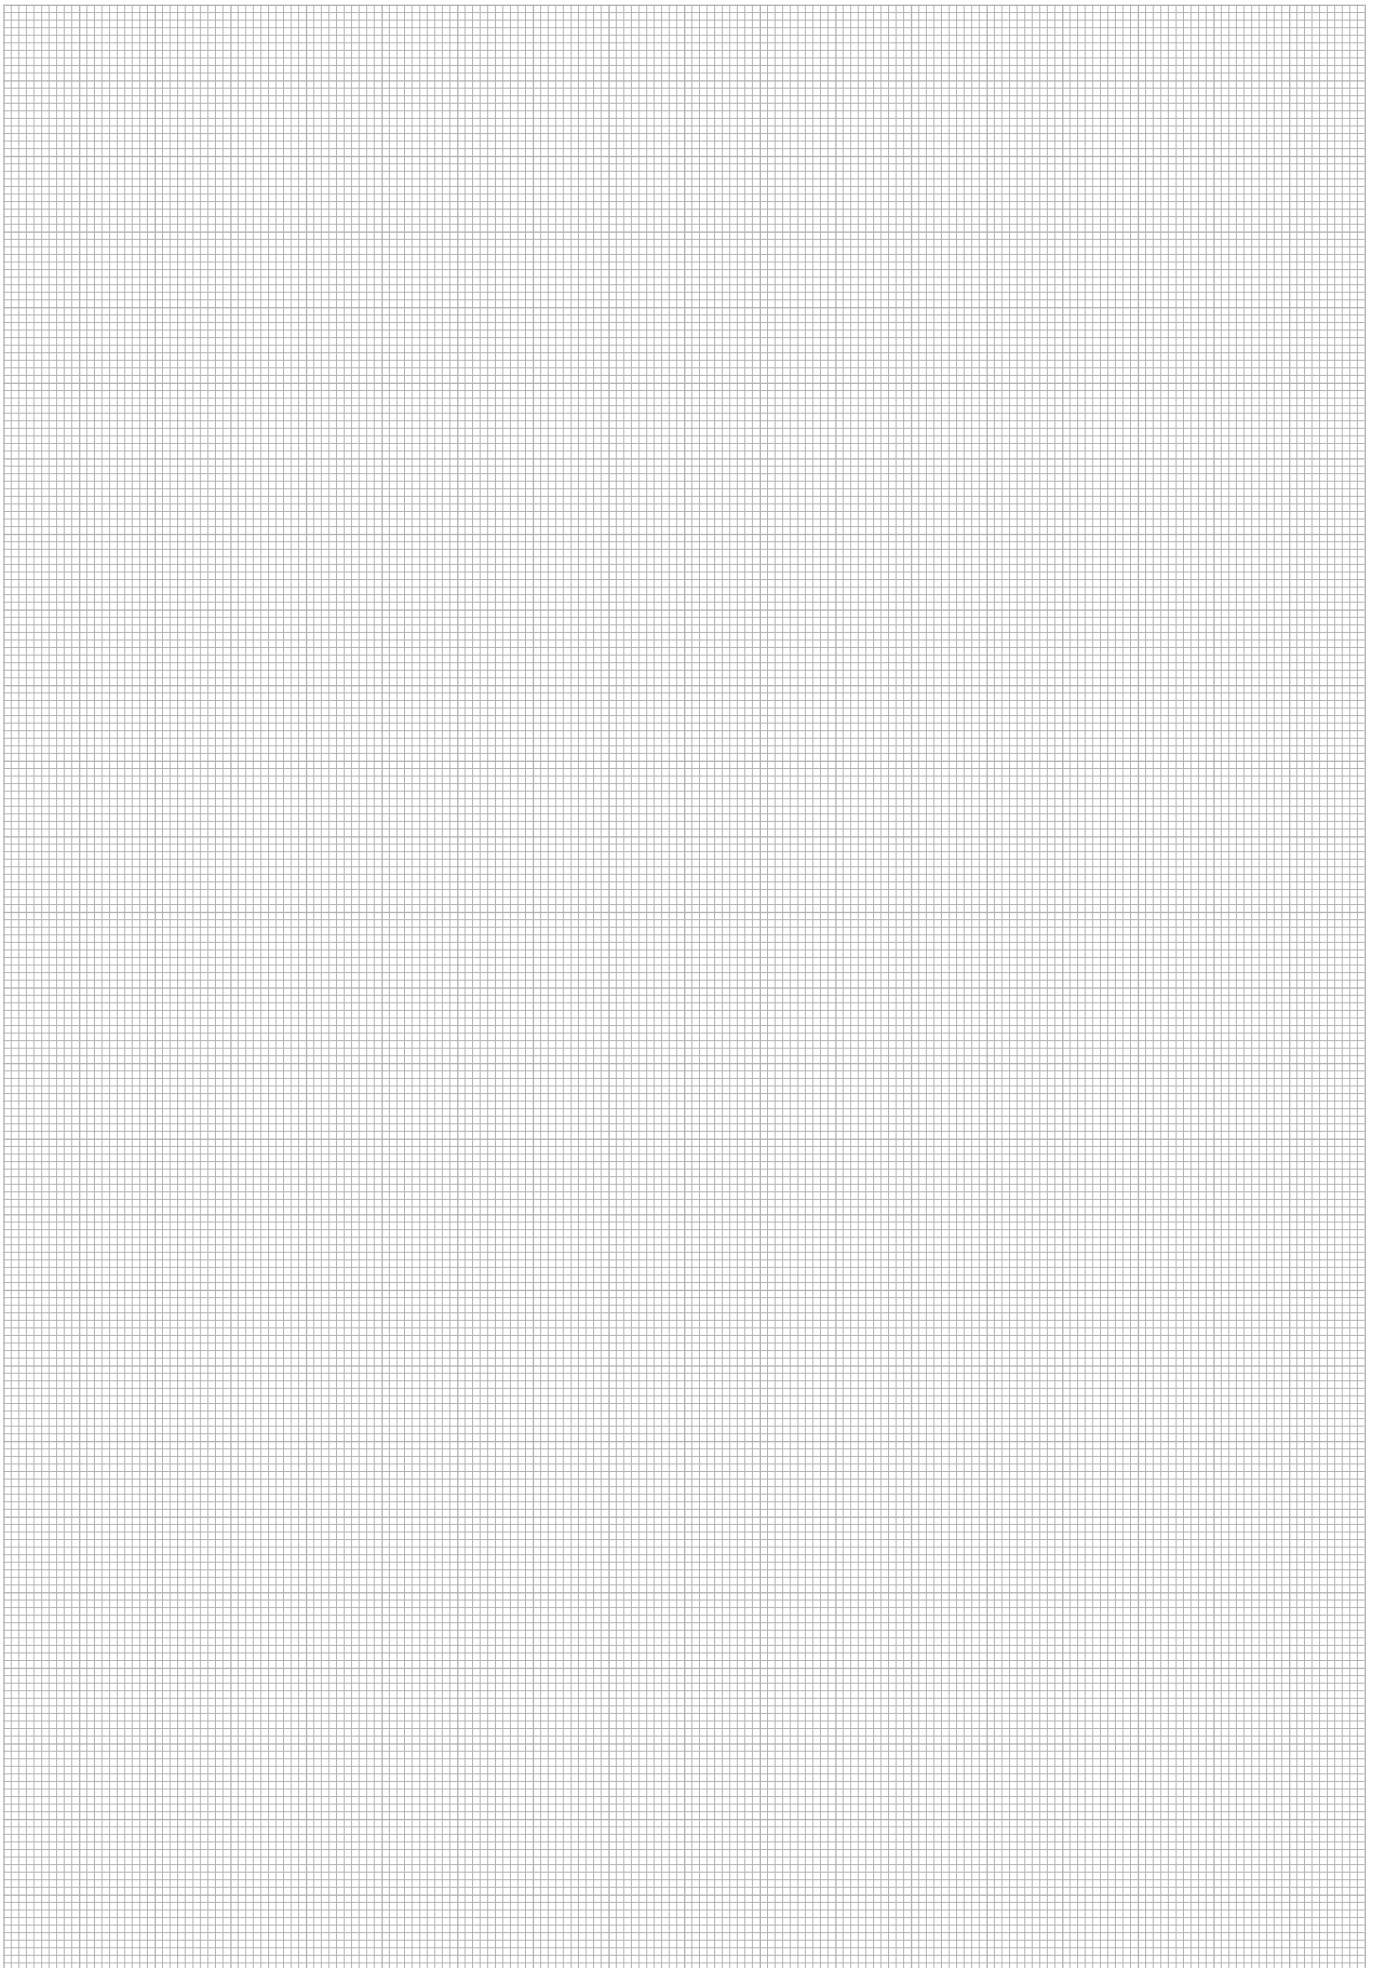

Return Line Filters ■ Type RF

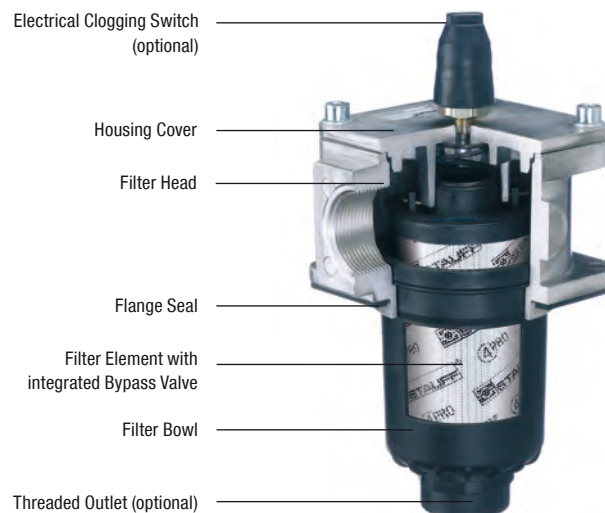

Product Description

STAUFF RF Return Line Filters are designed as tank top filters. They are mounted directly on the tank top and when 100% of the system's oil is filtered they provide the optimum removal of contaminant from the system. This provides the pump with clean oil thus reducing contaminant generated wear. The filter bowl is designed to return the oil beneath the surface thus preventing the entrainment of air by the returning oil. A high efficiency of contaminant removal is assured by using STAUFF RE Replacement Filter Elements. The high dirt-hold capacity of STAUFF Elements ensures a long service life and as a result reduced maintenance costs.

Technical Data

Construction

- Tank Top flange mounting

Materials

- Filter head: Aluminium
- Filter bowl: Glass Fibre reinforced Polyamide
- Sealings: NBR (Buna-N®)
FPM (Viton®)
EPDM (Ethylene-Propylene-Diene-Monomer-Rubber)
Other sealing materials on request

Port Connection

- BSP
- NPT
- SAE O-ring thread
- SAE flange 3000 PSI

Operating Pressure

- Max. 16 bar / 232 PSI

Temperature Range

- -10 °C ... +100 °C / +14 °F ... +212 °F

Filter Elements

- Specifications see page C74

Media Compatibility

- Mineral oils, other fluids on request

Options and Accessories


Valve

- Bypass valve (integrated in the filter element) Opening pressure 3 bar \pm 0,3 bar / 43.5 PSI \pm 4.35 PSI
Other settings available on request

Clogging Indicators

- Visual clogging indicator 0 ... 4 bar / 0 ... 58 PSI coloured segments
- Electrical clogging switch, setting 2,5 bar / 36.25 PSI
Other clogging indicators available on request

Return Line Filters ■ Type RF

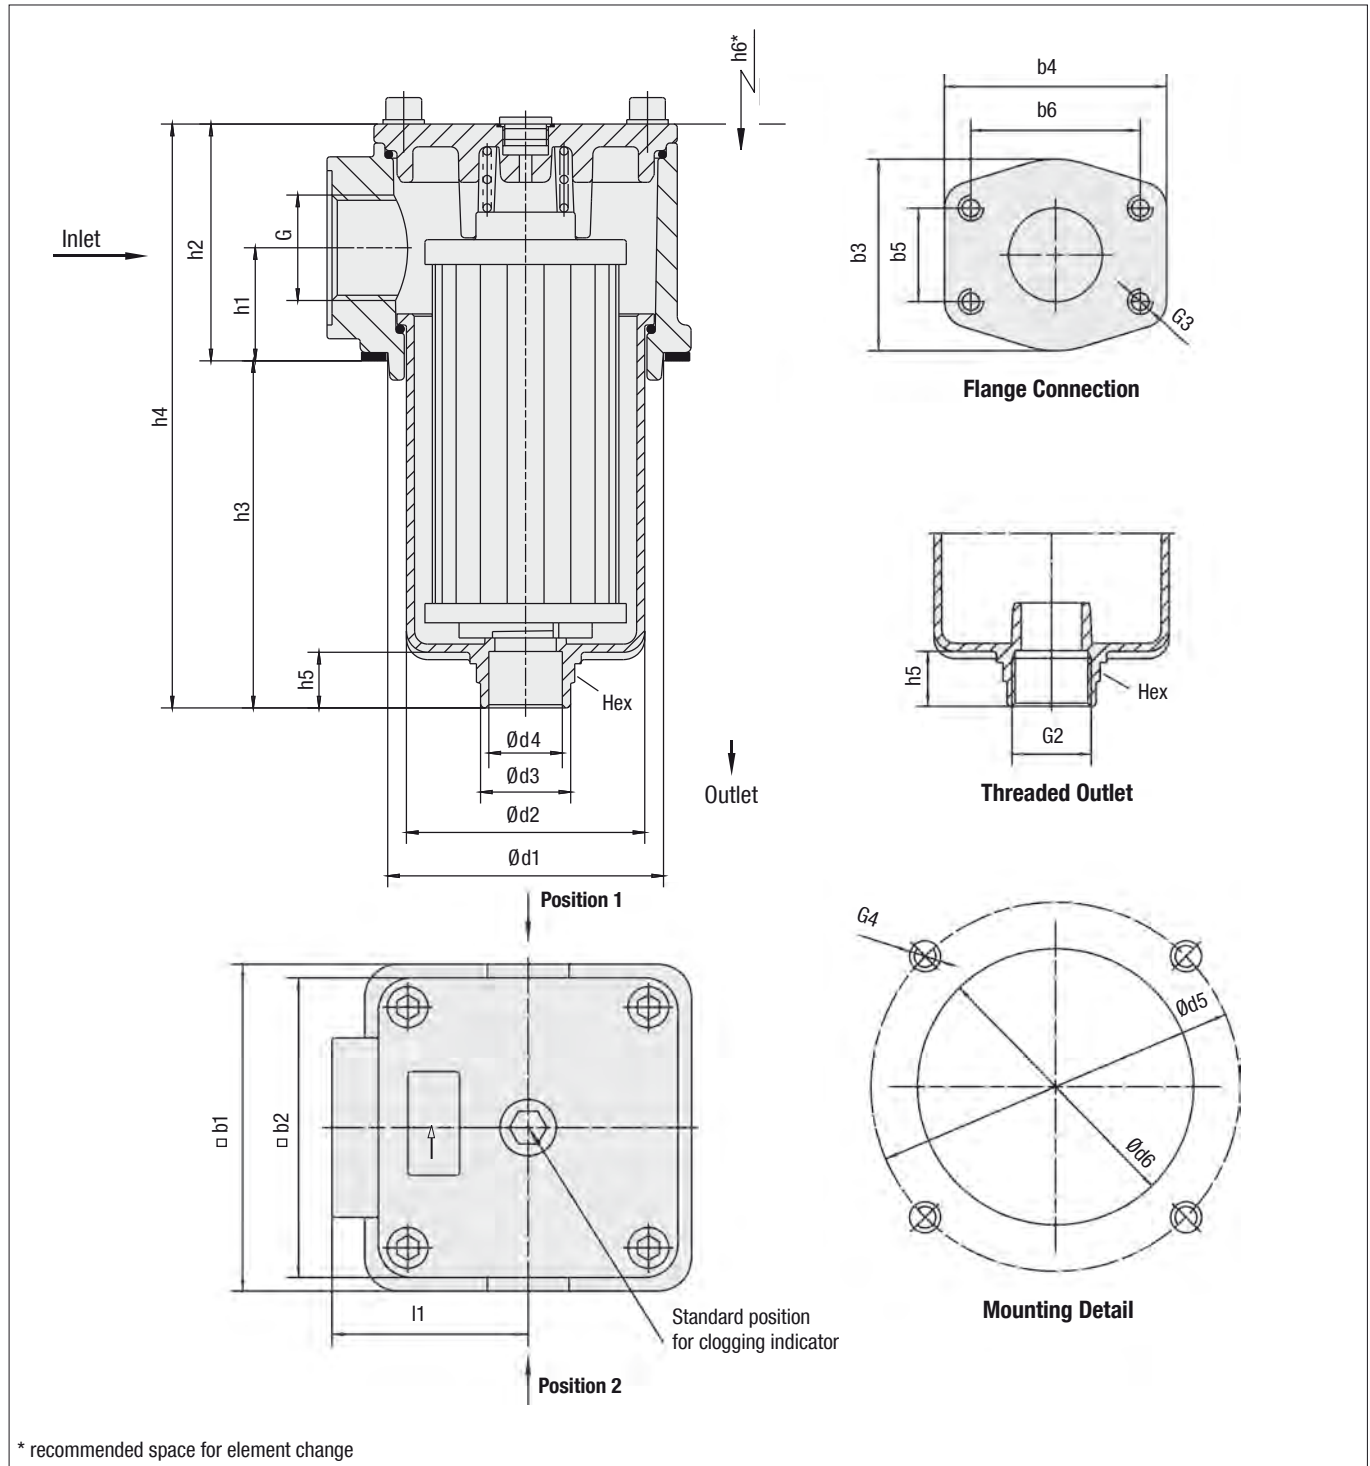

Return Line Filters ■ Type RF

Thread Connection G	Filter Size RF					
	014	030	045	070	090	130
BSP	3/4	1	1-1/4	1-1/2	2	2
NPT	3/4	1	1-1/4	1-1/2	2	2
SAE O-ring Thread	1-1/16-12	1-5/16-12	1-5/8-12	1-7/8-12	1-7/8-12	1-7/8-12
SAE Flange 3000 PSI	-	-	-	-	2	2

Dimensions (mm/in)	Filter Size RF					
	014	030	045	070	090	130
b1	89	89	120	120	150	150
	3.50	3.50	4.72	4.72	5.91	5.91
b2	80	80	110	110	135	135
	3.15	3.15	4.33	4.33	5.31	5.31
b3	-	-	-	-	88	88
	-	-	-	-	3.47	3.47
b4	-	-	-	-	102	102
	-	-	-	-	4.02	4.02
b5	-	-	-	-	42,9	42,9
	-	-	-	-	1.69	1.69
b6	-	-	-	-	77,8	77,8
	-	-	-	-	3.06	3.06
d1	73	73	100	100	126	126
	2.87	2.87	3.94	3.94	4.96	4.96
d2	57,5	57,5	84	84	112,5	112,5
	2.26	2.26	3.31	3.31	4.43	4.43
d3	36	36	48	48	54,5	54,5
	1.42	1.42	1.89	1.89	2.15	2.15
d4	17	17	28	28	37,5	37,5
	.67	.67	1.1	1.1	1.48	1.48
d5	100	100	135	135	170	170
	3.94	3.94	5.31	5.31	6.69	6.69
d6	78	78	105	105	131	131
	3.07	3.07	4.13	4.13	5.16	5.16
h1	33	33	41	41	47	47
	1.30	1.30	1.61	1.61	1.85	1.85
h2	66	66	86	86	98	98
	2.60	2.60	3.39	3.39	3.86	3.86
h3	91,5	159,5	119	180	172,5	252,5
	3.60	6.28	4.69	7.09	6.79	9.94
h4	157,5	225,5	206	267	273,5	353,5
	6.20	8.88	8.11	10.51	10.77	13.91
h5	23,5	23,5	24	24	27	27
	.93	.93	.95	.95	1.06	1.06
h6	140	210	180	240	235	315
	5.51	8.27	7.09	9.45	9.25	12.40
I1	48	48	66	66	85	85
	1.89	1.89	2.60	2.60	3.35	3.35
G2	G1 or 1 NPT	G1 or 1 NPT	G1-1/4 or 1-1/4 NPT	G1-1/4 or 1-1/4 NPT	G1-1/2 or 1-1/2 NPT	G1-1/2 or 1-1/2 NPT
G3	-	-	-	-	1/2 UNC x 15	1/2 UNC x 15
	-	-	-	-	1/2 UNC x .59	1/2 UNC x .59
G4	M6 or 1/4-20 UNC	M6 or 1/4-20 UNC	M8 or 5/16-18 UNC	M8 or 5/16-18 UNC	M10 or 3/8-16 UNC	M10 or 3/8-16 UNC
Hex	36	36	50	50	55	55
	1.42	1.42	1.97	1.97	2.16	2.16

Return Line Filter Housings / Complete Filters ■ Type RF

RF 070 ... B / B / G42NC / D / G / L1 / X

1 2 3 4 5 6 7 8 9 10 11

1 Type

Return Line Filter **RF**

2 Group

Flow	Size
60 l/min / 14 US GPM	014
110 l/min / 30 US GPM	030
160 l/min / 45 US GPM	045
240 l/min / 70 US GPM	070
330 l/min / 90 US GPM	090
500 l/min / 130 US GPM	130

Note: Exact flow will depend on filter element selected.
Consult technical data on pages C76 / C77.

3 Filter Material

Material	max. Δp^* collapse	Micron ratings available	Code
Without filter element	-	-	...
Inorg. glass fibre	25 bar / 363 PSI	3, 5, 10, 20	G
Stainless fibre	30 bar / 435 PSI		A
Filter paper	10 bar / 145 PSI	10, 20	N
Stainless mesh	30 bar / 435 PSI	25, 50, 100, 200	S

Note: *Collapse/burst resistance as per ISO 2941. Other materials on request.

4 Micron Rating

3 µm	03
5 µm	05
10 µm	10
20 µm	20
25 µm	25
50 µm	50
100 µm	100
200 µm	200

Note: Other micron ratings on request.

5 Sealing Materials

NBR (Buna®)	B
FPM (Viton®)	V
EPDM	E

Note: Other sealing materials on request

6 Connection Style

Connection Style	Group						Thread Style	Code
	014	030	045	070	090	130		
BSP	3/4	1	1-1/4	1-1/2	2	2	-	B
BSP	1/2	1/2	1-1/2	1-1/4	1-1/4	1-1/4	-	B1
BSP	1	3/4	-	-	1-1/2	1-1/2	-	B2
NPT	3/4	1	1-1/4	1-1/2	2	2	-	N
NPT	1	3/4	1-1/2	1-1/4	1-1/2	1-1/2	-	N1
SAE O-ring Thread	1-1/16	1-5/16	1-5/8	1-7/8	1-7/8	1-7/8	-	U
SAE O-ring Thread	1-5/16	1-1/16	1-7/8	1-5/8	1-5/8	1-5/8	-	U1
SAE Flange 3000 PSI	-	-	-	-	2	2	metric	FM
SAE Flange 3000 PSI	-	-	-	-	2	2	UNC	FU

Note: Bold types identify preferred connection styles.

7 Clogging Indicator

	Position*		
Without Clogging Indicator	-		0
Visual Clogging Indicator			M
Electrical Clogging Switch 42 V, NO			G42NO
Electrical Clogging Switch 42 V, NC			G42NC
Electrical Clogging Switch 110 V, two-way contact	1	2	G110
Electrical Clogging Switch 230 V, two-way contact			G230

Note: *Position of clogging indicator see page C72.

Without any code: assembly in the middle of the filter cover.

8 Option Clogging Indicator G42NO and G42NC

Plug connector and rubber cap	none
Deutsch plug	D
AMP plug	A
M12 x 1,5	M12

9 Outlet Style

Standard outlet (without thread)	0
Filter bowl with threaded outlet	G

10 Additional Features

	Position*		
Without leakage oil connection	-		none
Leakage oil connection	1	2	L

Note: *Position of the leakage oil connection see page C72.

Without any code: assembly in the middle of the filter cover.

11 Design Code

Only for information	X
----------------------	----------

Filter Elements ■ Type RE

RE - 014 G 10 B / X

1 2 3 4 5 6

1 Type

Filter Element Series **RE**

2 Group

According to filter housing

3 Filter Material

Material	Max. Δp^* collapse	Micron ratings available	Code
Inorg. glass fibre	25 bar / 363 PSI	3, 5, 10, 20	G
Stainless fibre	30 bar / 435 PSI		A
Filter paper	10 bar / 145 PSI	10, 20	N
Stainless mesh	30 bar / 435 PSI	25, 50, 100, 200	S

Note: *Collapse/burst resistance as per ISO 2941. Other materials on request.

4 Micron Rating

3 µm	03
5 µm	05
10 µm	10
20 µm	20
25 µm	25
50 µm	50
100 µm	100
200 µm	200

Note: Other micron ratings on request.

5 Sealing Materials

NBR (Buna®)	B
FPM (Viton®)	V
EPDM	E

Note: Other sealing materials on request.

6 Design Code

Only for information	X
----------------------	----------

Return Line Filters ■ Type RF

Visual Clogging Indicator

The gauge visually displays the degree of contamination of the element.
The colored segments allow quick visual checking.

green	0 ... 2,5 bar / 0 ... 36.25 PSI	Element has service life left
yellow	2,5 ... 3,0 bar / 36.25 ... 43.5 PSI	Element is contaminated and should be changed
red	>3,0 bar / >43.5 PSI	Bypass valve open, unfiltered oil passing to tank


Electrical Clogging Switch

The switch is used where an electrical signal is needed to indicate when the element needs changing. The switch can turn on a light, or shut the machine down, or any further function controlled by an electric signal. The switching pressure is 2,5 bar / 36.25 PSI and this allows the element to be changed before the bypass setting of 3 bar / 43.5 PSI is reached.


Standard type with plug connector and rubber cap. Available with DEUTSCH DT04-2P plug (industrial standard), AMP Junior Timer plug (industrial standard) and five-pin circular connector M12, A-coded, according to IEC 61076-2-101.

Maximum Voltage	Switch Type	Note: The customer / user carries the responsibility for the electrical connection.
42 V (normally open)	G42NO	
42 V (normally closed)	G42NC	
110 V (two-way contact)	G110	
230 V (two-way contact)	G230	

Visual Clogging Indicator

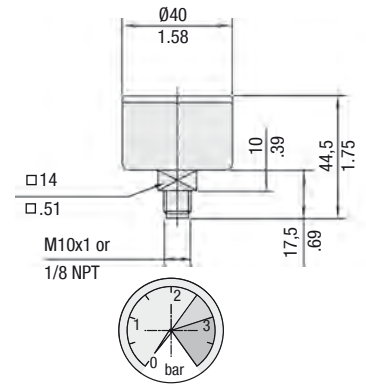

Electrical Clogging Switch




Dimensions in mm/in

Filter Bowl with Threaded Connection

Under some circumstances such as a tall reservoir or one with oil levels which vary greatly during operation, it is necessary to extend the filter bowl so that the returning oil returns beneath the surface and does not entrain air in the process. The optional bowl with a female thread allows an extension to be fitted quite simply. The one piece design also allows for inline applications.

Threaded Outlet




Dimensions see table page C73

Leakage Oil Connection

Seal or case drain lines can be connected to the filter through either of the clogging indicator ports providing that the leakage oil can accept a pressure of 3 bar / 43.5 PSI. It ensures that no unfiltered oil can return to the reservoir.

Leakage Oil Connection




Filter Bowl with Threaded Connection and Diffuser

Diffusers mounted to the filter bowl minimise foaming and reduce noise of high return line flows. For further details on STAUFF Diffusers please refer to the "Hydraulic Accessories" section on page E36.
Attention: Connection pipe not included in scope of delivery!












Size SRV	for Return Line Filter Size	Dimensions (mm/in)		Thread G	Hex
		øD	L		
SRV-114-B16	RF 014/030	60	139	G1	46
SRV-114-N16		2.36	5.47	1 NPT	1.81
SRV-200-B20	RF 045/070	82	139	G1-1/4	60
SRV-200-N20		3.23	5.47	1-1/4 NPT	2.36
SRV-227-B24	RF 090/130	82	200	G1-1/2	60
SRV-227-N24		3.23	7.87	1-1/2 NPT	2.36

Threaded Outlet with SRV

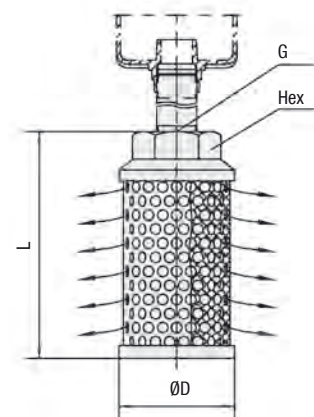







Return Line Filters ■ Type RF Flow Characteristics


The following characteristics are valid for mineral oils with a density of $0,85 \text{ kg/dm}^3$ and the kinematic viscosity of $30 \text{ mm}^2/\text{s}$ (30cSt). The characteristics have been determined in accordance to ISO 3968. Multipass filter ratings have been obtained in accordance to ISO 16889. The housing pressure drop is directly proportional to the oil density. Consult STAUFF for details.

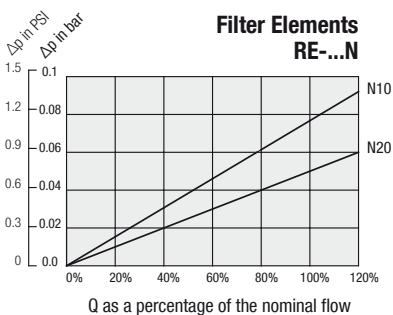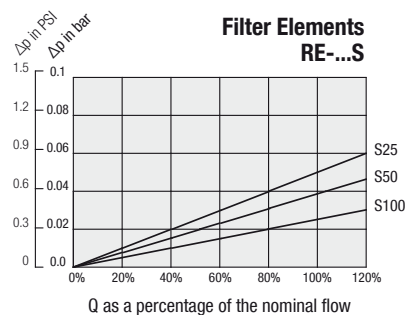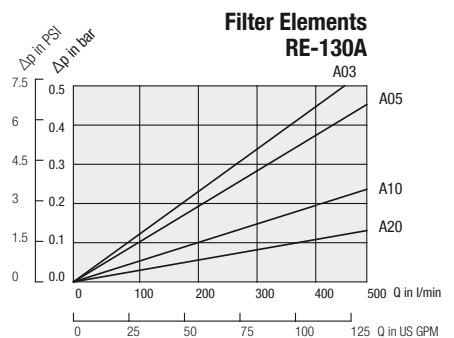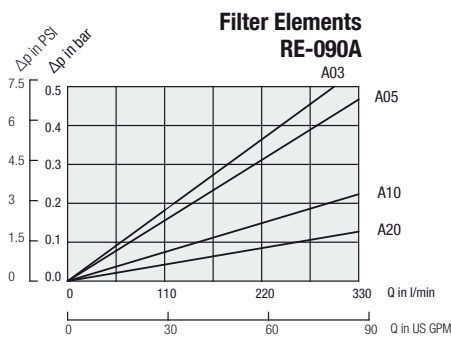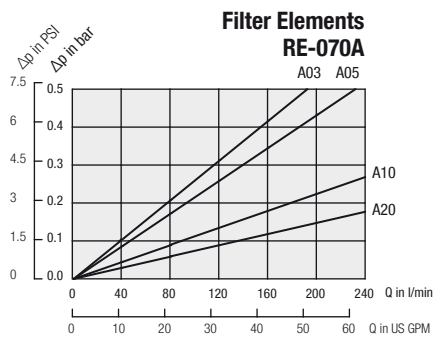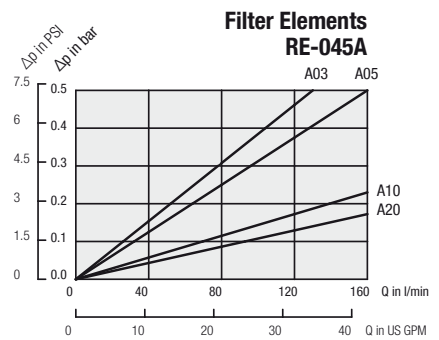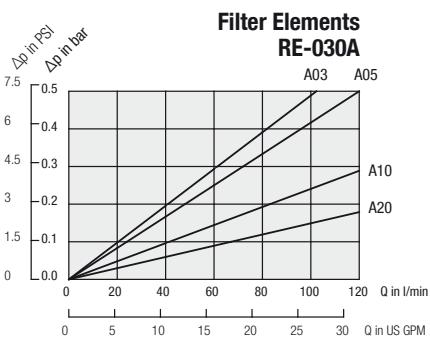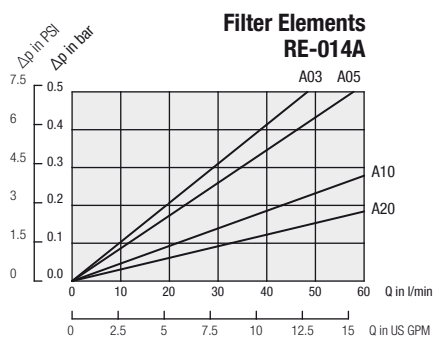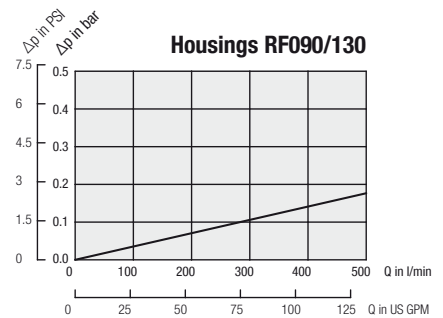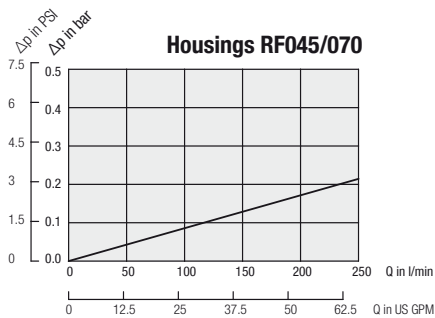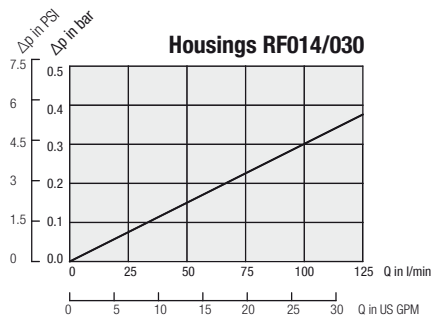

Return Line Filters ■ Type RF Flow Characteristics

The following characteristics are valid for mineral oils with a density of 0,85 kg/dm³ and the kinematic viscosity of 30 mm²/s (30cSt). The characteristics have been determined in accordance to ISO 3968. Multipass filter ratings have been obtained in accordance to ISO 16889. The housing pressure drop is directly proportional to the oil density. Consult STAUFF for details.

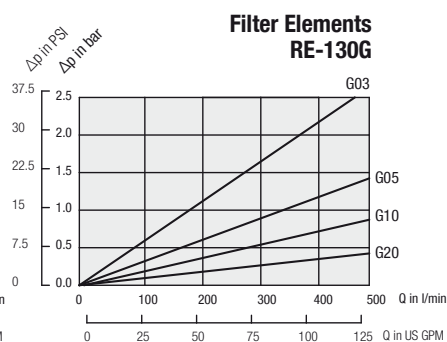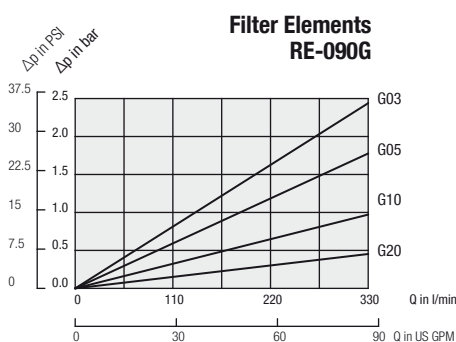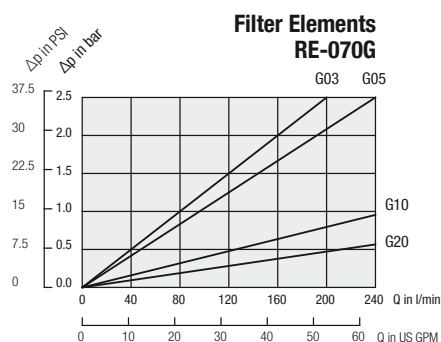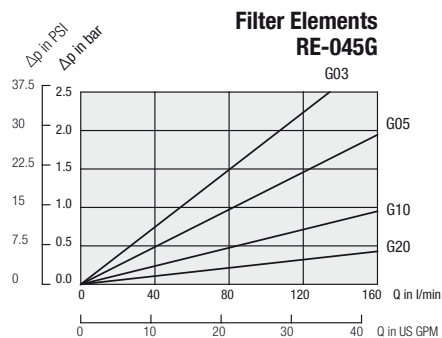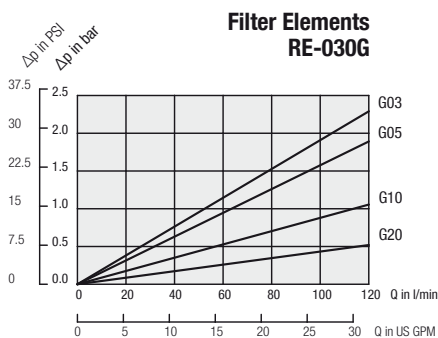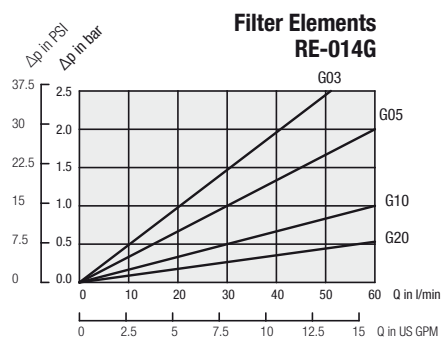

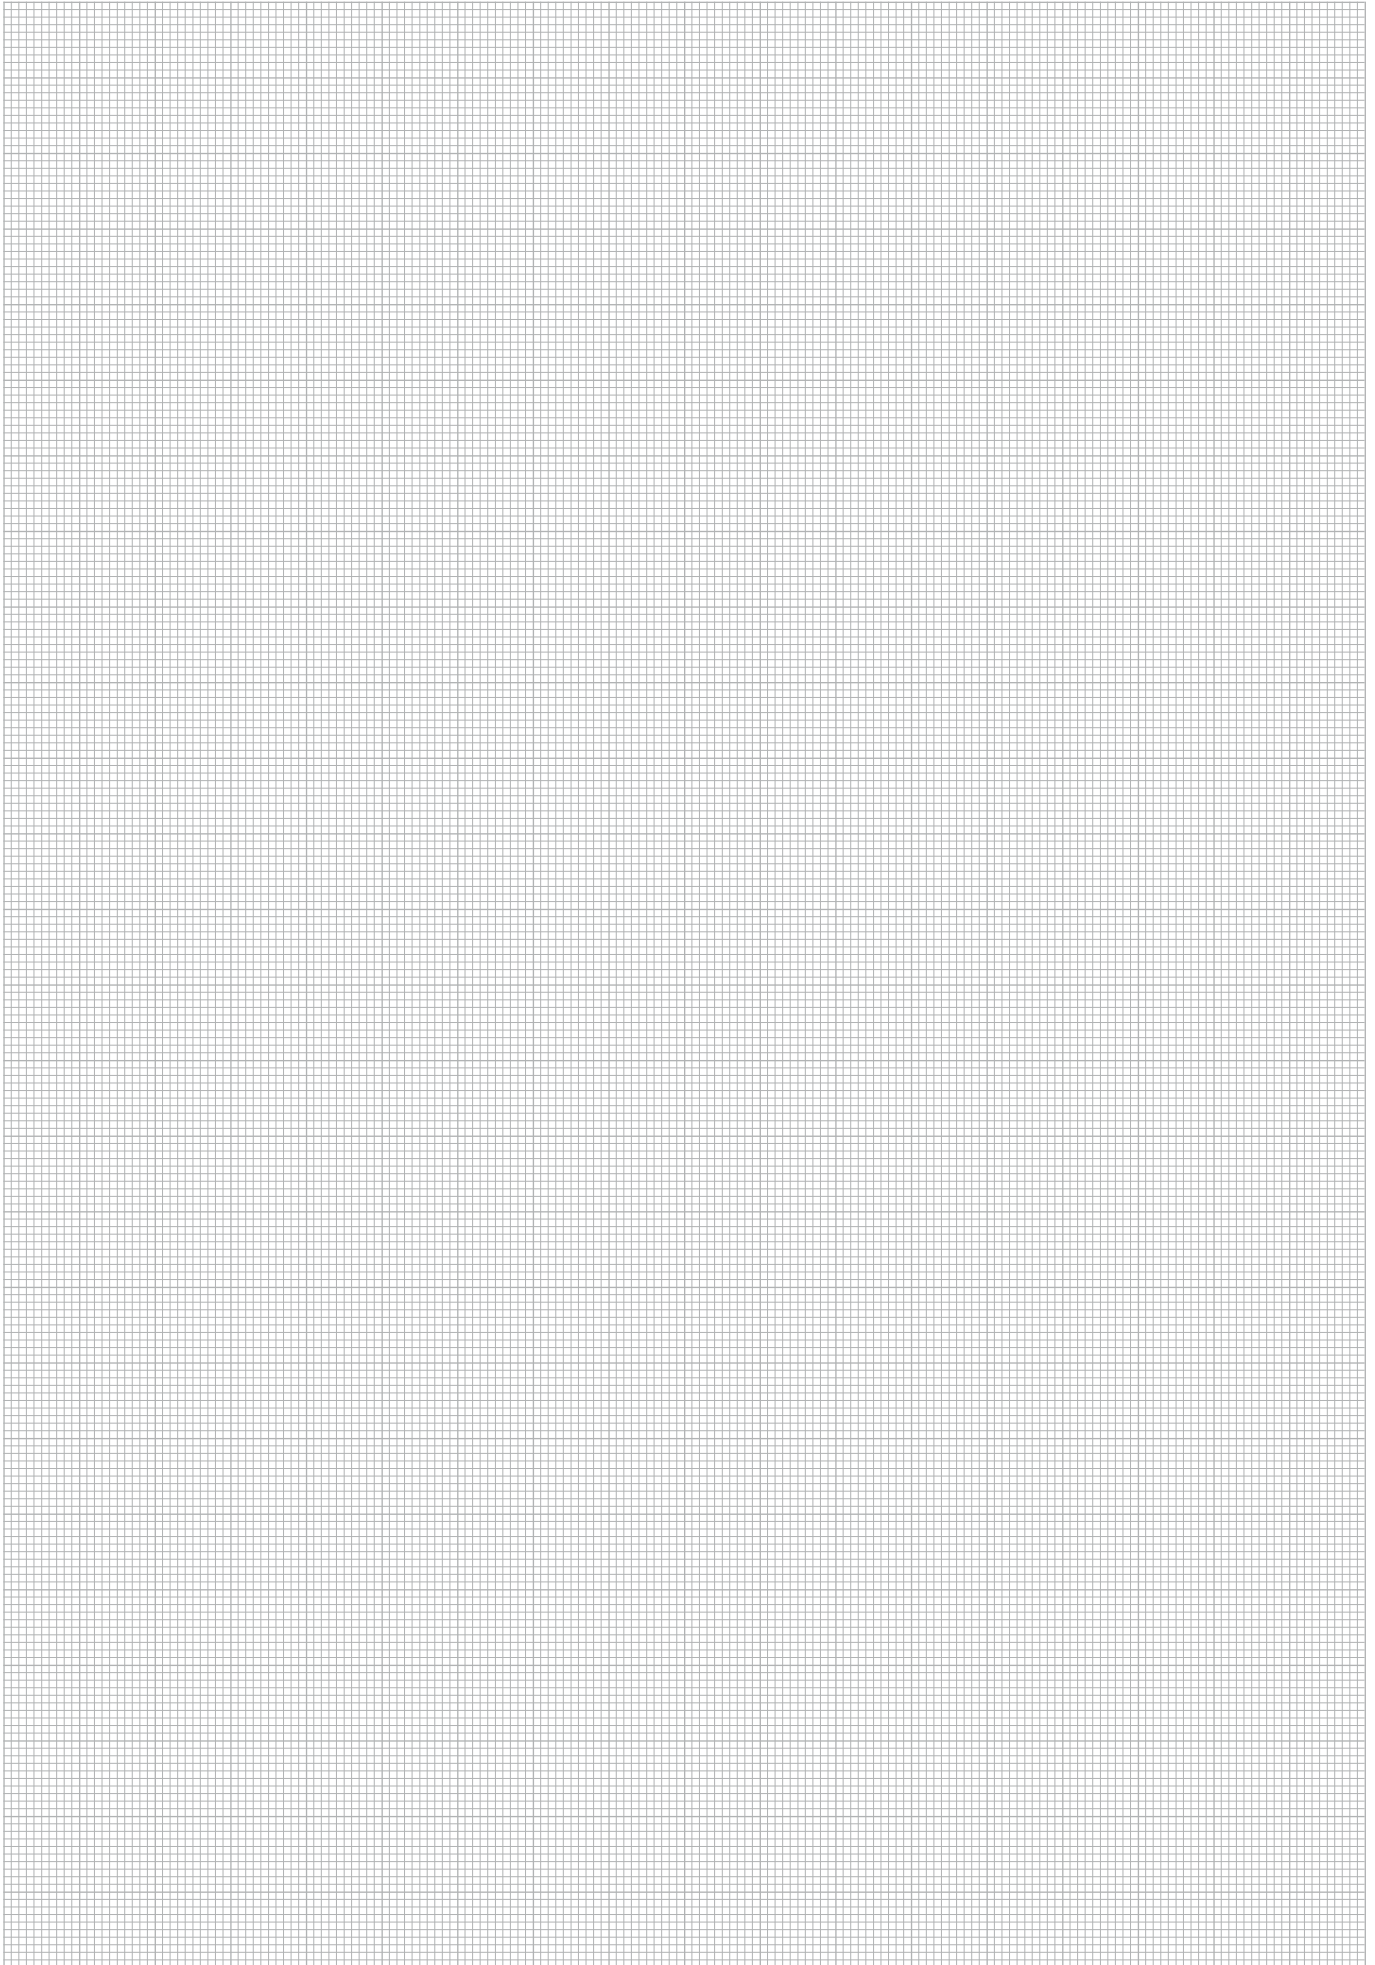

Return Line Filters ■ Type RFA



Product Description

STAUFF RFA Return Line Filters are a one piece design and can be used as a tank top or an in-line filter. They are mounted in the return line and if 100% of the system oil is filtered, provide the optimum removal of contaminant for the systems. This provides the pump with clean oil, thus reducing contaminant generated wear. A high efficiency of contaminant removal is assured by using STAUFF RE Replacement Filter Elements. The high dirt-hold capacity of STAUFF Elements ensures a long service life and as a result reduced maintenance costs.

Technical Data

Construction

- Tank Top or in-line mounting

Materials

- Filter housing: Aluminium
- Sealings: NBR (Buna-N®)
FPM (Viton®)
EPDM (Ethylene Propylene Diene Monomer Rubber)
Other sealing materials on request

Port Connection

- SAE O-ring thread
- BSP

Operating Pressure

- Max. 25 bar / 365 PSI

Temperature Range

- -10 °C ... +100 °C / +14 °F ... +212 °F

Filter Elements

- Specifications see page C82

Media Compatibility

- Mineral oils, other fluids on request

Options and Accessories


Valve

- Bypass valve (integrated in the filter element) Opening pressure 3 bar ± 0,3 bar / 43.5 PSI ± 4.35 PSI
Other settings available on request

Clogging Indicators

- Visual clogging indicator 0 ... 4 bar / 0 ... 58 PSI coloured segments
- Electrical clogging switch, setting 2,5 bar / 36.25 PSI
Other clogging indicators available on request

Return Line Filters ■ Type RFA

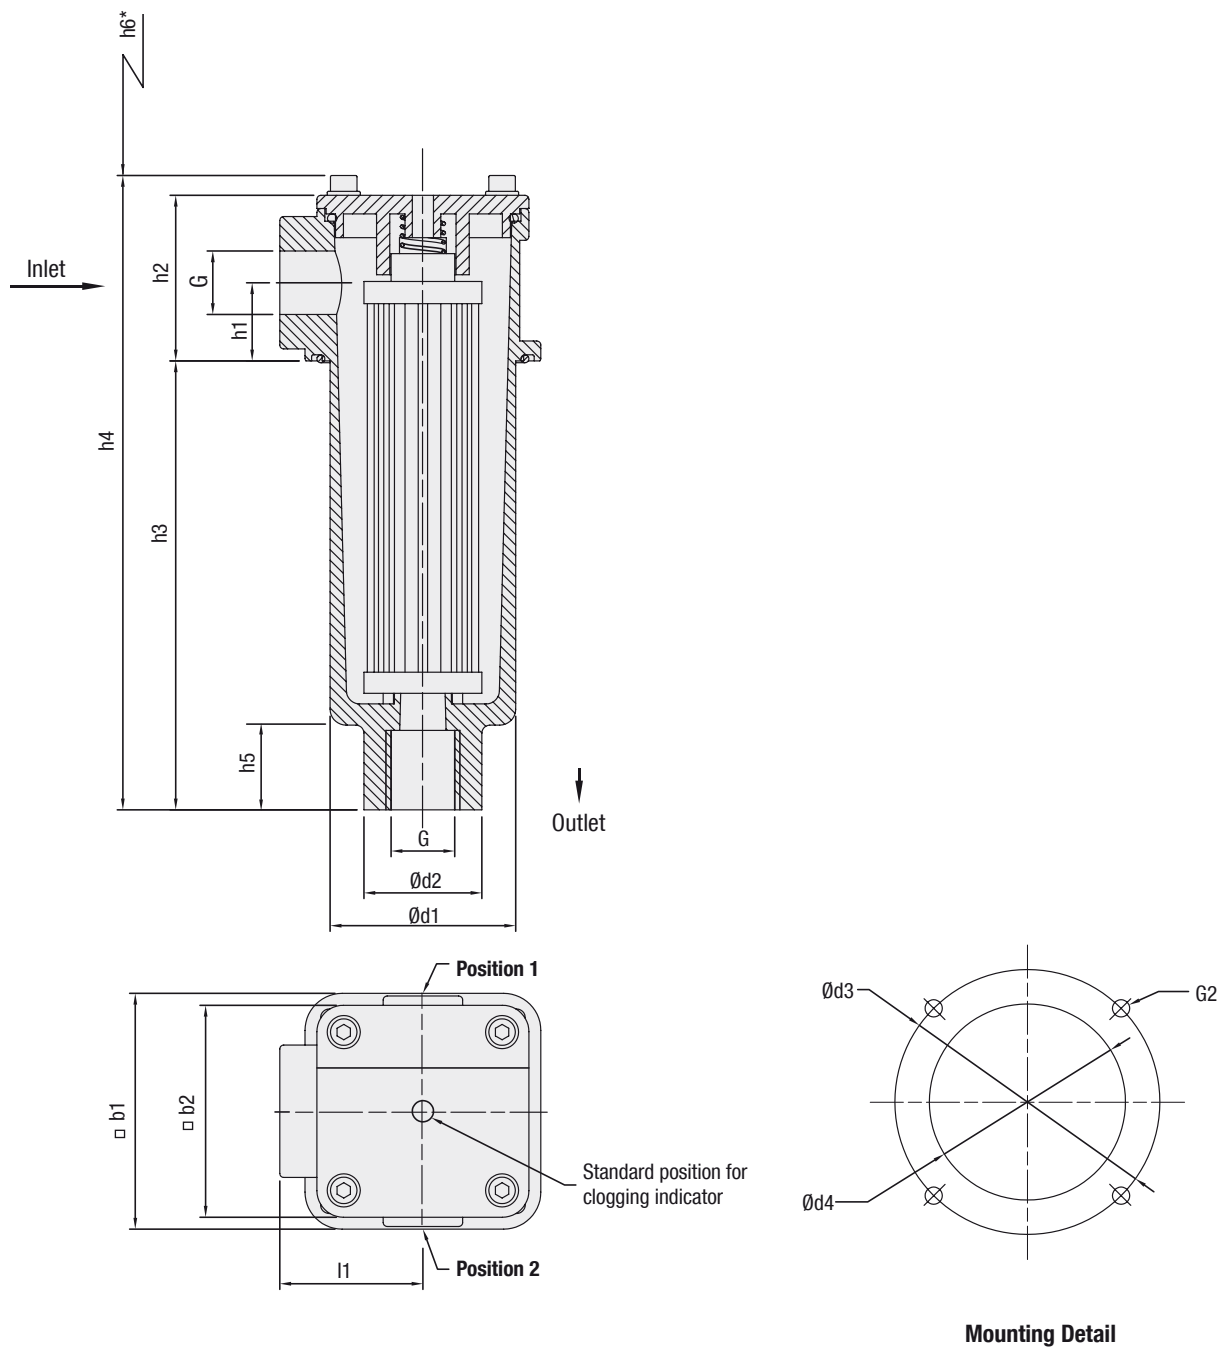

* recommended space for element change

Return Line Filters ▀ Type RFA

Thread Connection G	Filter Size RFA030
SAE O-ring Thread U	1-1/16-12
SAE O-ring Thread U1	3/4-16
BSP B	1/2
BSP B1	3/4

Dimensions (mm/in)	Filter Size RFA030
h1	25,5
	1.16
h2	62,5
	2.46
h3	169,5
	6.67
h4	239,5
	9.43
h5	32
	1.26
h6	210
	8.27
b1	89
	3.50
b2	80
	3.15
d1	70
	2.76
d2	44,5
	1.75
d3	100
	3.94
d4	74
	2.91
l1	54
	2.16
G2	M6 or 1/4 UNC

Return Line Filter Housings / Complete Filters ■ Type RFA

RFA	030	B	/	U	/	G42NC	/	D	/	G	/	L1	/	X
1	2	3	4	5	6	7	8	9	10	11						

1 Type
Return Line Filter **RFA**

2 Group
Flow **Size**
110 l/min / 30 US GPM **030**
Note: Exact flow will depend on filter element selected.
Consult technical data on pages C84.

3 Filter Material

Material	Max. Δp*collapse	Micron ratings available	Code
Without filter element	-	-	...
Inorg. glass fibre	25 bar / 363 PSI	3, 5, 10, 20	G
Stainless fibre	30 bar / 435 PSI	10, 20	A
Filter paper	10 bar / 145 PSI	10, 20	N
Stainless mesh	30 bar / 435 PSI	25, 50, 100, 200	S

Note: *Collapse/burst resistance as per ISO 2941.
Other materials on request.

4 Micron Rating

3 µm	03
5 µm	05
10 µm	10
20 µm	20
25 µm	25
50 µm	50
100 µm	100
200 µm	200

Note: Other micron ratings on request.

5 Sealing Material

NBR (Buna®)	B
FPM (Viton®)	V
EPDM	E

Note: Other sealing materials on request

6 Connection Style

Connection Style	Thread	Code
SAE-O-ring Thread	1-1/16-12	U
SAE-O-ring Thread	3/4-16	U1
BSP	1/2	B
BSP	3/4	B1

7 Clogging Indicator

	Position*	Code
Without Clogging Indicator	-	0
Visual Clogging Indicator		M
Electrical Clogging Switch 42 V, NO		G42NO
Electrical Clogging Switch 42 V, NC		G42NC
Electrical Clogging Switch 110 V, two-way contact	1 2	G110
Electrical Clogging Switch 230 V, two-way contact		G230

Note: *Position of clogging indicator see page C80.
Without any code: assembly in the middle of the filter cover.

8 Option Clogging Indicator G42NO and G42NC

Plug connector and rubber cap	none
Deutsch plug	D
AMP plug	A
M12 x 1,5	M12

9 Outlet Style

Standard outlet (without thread)	0
Filter bowl with threaded outlet	G

10 Additional Features

	Position*	Code
Without leakage oil connection	-	none
Leakage oil connection	1 2	L1

Note: *Position of the leakage oil connection see page C80.
Without any code: assembly in the middle of the filter cover.

11 Design Code
Only for information **X**

Filter Elements ■ Type RE

RE	-	030	G	10	B	/	X
1	2	3	4	5	6		

1 Type
Filter Element Series **RE**

2 Group
According to filter housing

3 Filter Material

Material	Max. Δp*collapse	Micron ratings available	Code
Inorg. glass fibre	25 bar / 363 PSI	3, 5, 10, 20	G
Stainless fibre	30 bar / 435 PSI	10, 20	A
Filter paper	10 bar / 145 PSI	10, 20	N
Stainless mesh	30 bar / 435 PSI	25, 50, 100, 200	B, S

Note: *Collapse/burst resistance as per ISO 2941.
Bold types identify preferred material.
Other materials on request.

4 Micron Rating

3 µm	03
5 µm	05
10 µm	10
20 µm	20
25 µm	25
50 µm	50
100 µm	100
200 µm	200

Note: Other micron ratings on request.

5 Sealing Material

NBR (Buna®)	B
FPM (Viton®)	V
EPDM	E

Note: Other sealing materials on request.

6 Design Code
Only for information **X**

Return Line Filters ■ Type RFA

Visual Clogging Indicator

The gauge visually displays the degree of contamination of the element.
The colored segments allow quick visual checking.

green	0 ... 2,5 bar / 0 ... 36.25 PSI	Element has service life left
yellow	2,5 ... 3,0 bar / 36.25 ... 43.5 PSI	Element is contaminated and should be changed
red	>3,0 bar / >43.5 PSI	Bypass valve open, unfiltered oil passing to tank


Electrical Clogging Switch

The switch is used where an electrical signal is needed to indicate when the element needs changing. The switch can turn on a light, or shut the machine down, or any further function controlled by an electric signal. The switching pressure is 2,5 bar / 36.25 PSI and this allows the element to be changed before the bypass setting of 3 bar / 43.5 PSI is reached.


Standard type with plug connector and rubber cap. Available with DEUTSCH DT04-2P plug (industrial standard), AMP Junior Timer plug (industrial standard) and five-pin circular connector M12, A-coded, according to IEC 61076-2-101.

Maximum Voltage	Switch Type	Note: The customer / user carries the responsibility for the electrical connection.
42 V (normally open)	G42NO	
42 V (normally closed)	G42NC	
110 V (two-way contact)	G110	
230 V (two-way contact)	G230	

Visual Clogging Indicator

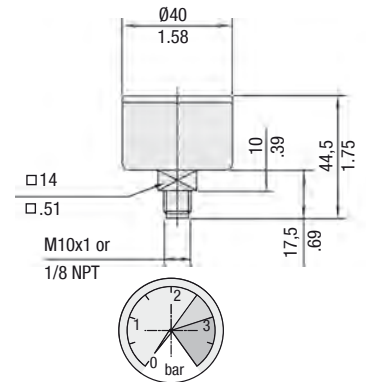

Electrical Clogging Switch



Dimensions in mm/in

Filter Bowl with Threaded Connection

Under some circumstances such as a tall reservoir or one with oil levels which vary greatly during operation, it is necessary to extend the filter bowl so that the returning oil returns beneath the surface and does not entrain air in the process. The optional bowl with a female thread allows an extension to be fitted quite simply. The one piece design also allows for inline applications.

Leakage Oil Connection


Seal or case drain lines can be connected to the filter through either of the clogging indicator ports providing that the leakage oil can accept a pressure of 3 bar / 43.5 PSI. It ensures that no unfiltered oil can return to the reservoir.

Filter Bowl with Threaded Connection and Diffuser

Diffusers mounted to the filter bowl minimise foaming and reduce noise of high return line flows. For further details on STAUFF Diffusers please refer to the "Hydraulic Accessories" section on page E36.
Attention: Connection pipe not included in scope of delivery!


Size SRV	for Return Line Filter Size	Dimensions (mm/in)			
		øD	L	Thread G	Hex
SRV-114-B16	RFA030	60	139	G1	46
SRV-114-N16		2.36	5.47	1 NPT	1.81

Threaded Outlet




Dimensions see table page C81

Leakage Oil Connection








Threaded Outlet with SRV

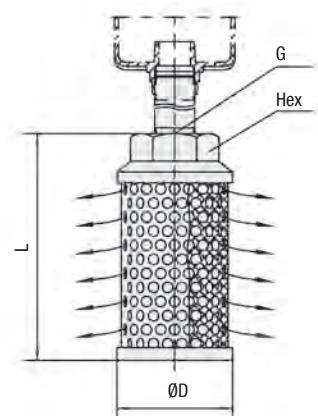

Return Line Filters ■ Type RFA Flow Characteristics

The following characteristics are valid for mineral oils with a density of 0,85 kg/dm³ and the kinematic viscosity of 30 mm²/s (30cSt). The characteristics have been determined in accordance to ISO 3968. Multipass filter ratings have been obtained in accordance to ISO 16889. The housing pressure drop is directly proportional to the oil density. Consult STAUFF for details.

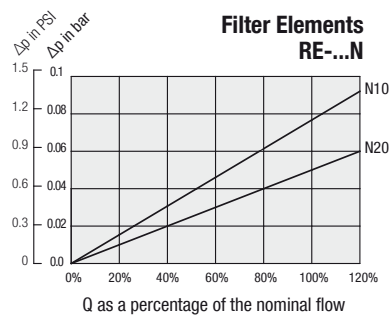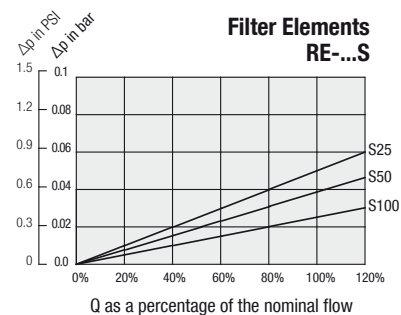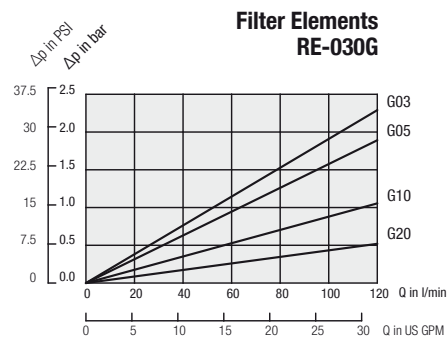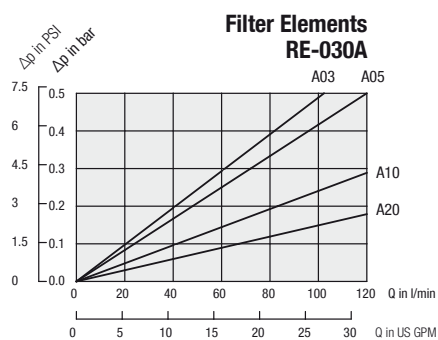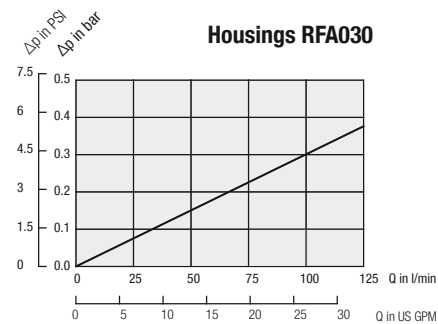

Return Line Filters ■ Type RFB



Product Description

STAUFF RFB Return Line Filters are designed as tank top filters. They are mounted directly on the tank top and if 100% of the system oil is filtered they provide the optimum removal of contaminant from the system. This provides the pump with clean oil thus reducing contaminant generated wear. Because of its low weight and compact design, the STAUFF RFB Filters are ideally suited for mobile hydraulic applications. A high efficiency of contaminant removal is assured by using STAUFF RE Replacement Filter Elements. The high dirt-hold capacity of STAUFF Elements ensures a long service life and as a result reduced maintenance costs.

Technical Data

Construction

- Tank Top flange mounting

Materials

- Filter head: Aluminium
- Filter bowl & cap: Glass Fibre Reinforced Polyamide
- Sealings: NBR (Buna-N®)
FPM (Viton®)
EPDM (Ethylene Propylene Diene Monomer Rubber)
Other sealing materials on request

Port Connection

- BSP
- NPT
- SAE O-ring thread

Operating Pressure

- Max. 10 bar / 145 PSI

Temperature Range

- -10 °C ... +100 °C / +14 °F ... +212 °F

Filter Elements

- Specifications see page C88

Media Compatibility

- Mineral oils, other fluids on request

Options and Accessories


Valve

- Bypass valve (integrated in the filter element) Opening pressure 3 bar ± 0,3 bar / 43.5 PSI ± 4.35 PSI
Other settings available on request

Clogging Indicators

- Visual clogging indicator 0 ... 4 bar / 0 ... 58 PSI coloured segments
- Electrical clogging switch, setting 2,5 bar / 36.25 PSI
Other clogging indicators available on request

Return Line Filters ■ Type RFB

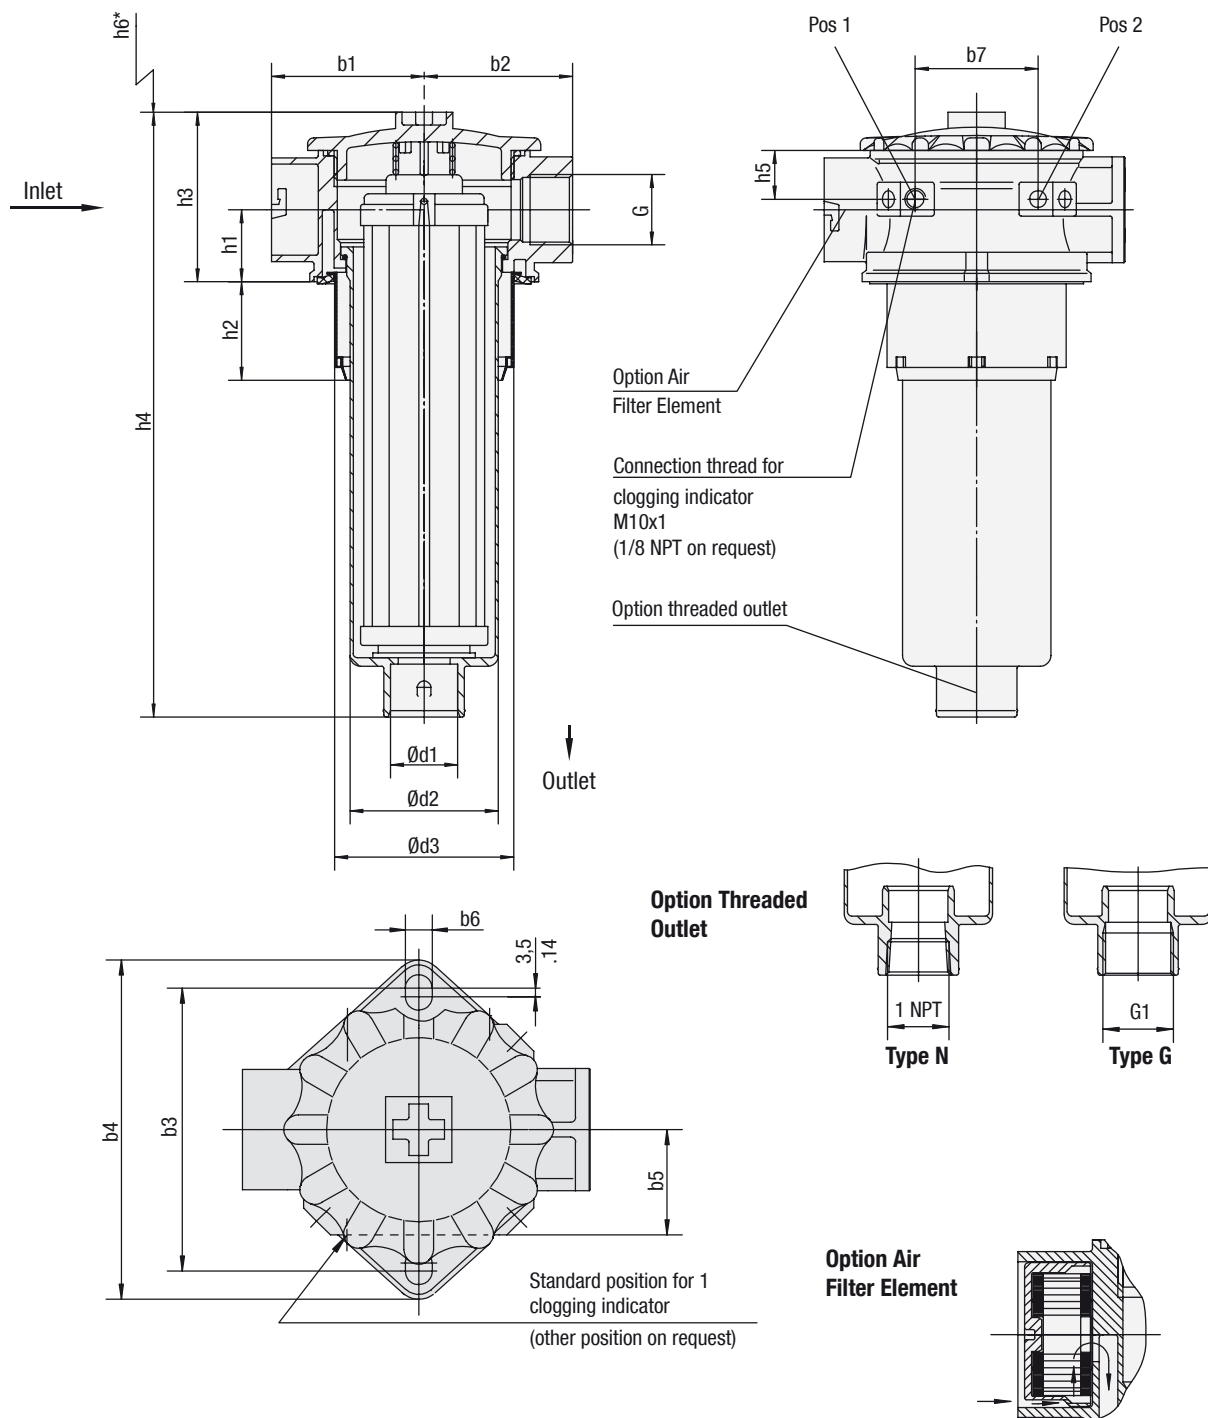

* recommended space for element change

Return Line Filters ■ Type RFB

Thread Connection G	Filter Size RFB					
	022		046		052	
BSP	3/4	1	3/4	1	3/4	1
NPT	3/4	1	3/4	1	3/4	1
SAE O-ring Thread	1-5/16-12					

Dimensions (mm/in)	Filter Size RFB					
	022		046		052	
h1	34		34		34	
	1.34		1.34		1.34	
h2	46,5		46,5		46,5	
	1.83		1.83		1.83	
h3	80		80		80	
	3.15		3.15		3.15	
h4	205,5		285,5		351,5	
	8.09		11.24		13.84	
h5	23		23		23	
	.91		.91		.91	
h6	154		239		305	
	6.26		9.41		12.01	
d1	32		32		32	
	1.26		1.26		1.26	
d2	70		70		70	
	2.76		2.76		2.76	
d3	84,5		84,5		84,5	
	3.33		3.33		3.33	
b1	72		72		72	
	2.84		2.84		2.84	
b2	70		70		70	
	2.76		2.76		2.76	
b3	115,5		115,5		115,5	
	4.55		4.55		4.55	
b4	138,5		138,5		138,5	
	5.45		5.45		5.45	
b5	43		43		43	
	1.69		1.69		1.69	
b6	11		11		11	
	.43		.43		.43	
b7	58		58		58	
	2.28		2.28		2.28	

Return Line Filter Housings / Complete Filters ■ Type RFB

RFB	022	B	/	B	/	G42NC	/	D	/	G	/	L10	/	X
1	2	3	4	5	6	7	8	9	10	11						

1 Type
Return Line Filter **RFB**

2 Group
Flow Size
75 l/min / 22 US GPM **022**
165 l/min / 46 US GPM **046**
185 l/min / 52 US GPM **052**
Note: Exact flow will depend on filter element selected.
Consult technical data on pages C90.

3 Filter Material

Material	Max. Δp*collapse	Micron ratings available	Code
Without filter element	-	-	...
Inorg. glass fibre	25 bar / 363 PSI	3, 5, 10, 20	G
Stainless fibre	30 bar / 435 PSI		A
Filter paper	10 bar / 145 PSI	10, 20	N
Stainless mesh	30 bar / 435 PSI	10, 25, 50, 100, 200	S

Note: *Collapse/burst resistance as per ISO 2941.
Other materials on request.

4 Micron Rating

3 µm	03
5 µm	05
10 µm	10
20 µm	20
25 µm	25
50 µm	50
100 µm	100
200 µm	200

Note: Other micron ratings on request.

5 Sealing Material

NBR (Buna®)	B
FPM (Viton®)	V
EPDM	E

Note: Other sealing materials on request.

6 Connection Style

Connection Style	Group			Code
	022	046	052	
BSP	1			B
BSP	3/4			B1
NPT	1			N
NPT	3/4			N1
SAE-O-ring Thread	1-5/16-12			U

Note: Bold types identify preferred connection style.

7 Clogging Indicator

	Position*		Code
Without Clogging Indicator	-		0
Visual Clogging Indicator			M
Electrical Clogging Switch 42 V, NO			G42NO
Electrical Clogging Switch 42 V, NC			G42NC
Electrical Clogging Switch 110 V, two-way contact	1	2	G110
Electrical Clogging Switch 230 V, two-way contact			G230

Note: *Position of clogging indicator see page C86.
Without any code: assembly in the middle of the filter cover.

8 Option Clogging Indicator G42NO and G42NC

Plug connector and rubber cap	none
Deutsch plug	D
AMP plug	A
M12 x 1,5	M12

9 Outlet Style

With thread G1 (Standard option)	G
With thread 1 NPT	N

10 Air Filter Element

Without Air Filter Element	0
Filter paper 10 micron	L10

Note: Other materials and micron ratings on request.

11 Design Code

Only for information	X
----------------------	----------

Filter Elements ■ Type RE

RE	-	022	G	10	B	/	X
1		2	3	4	5		6

1 Type
Filter Element Series **RE**

2 Group
According to filter housing

3 Filter Material

Material	Max. Δp*collapse	Micron ratings available	Code
Inorg. glass fibre	25 bar / 363 PSI	3, 5, 10, 20	G
Stainless fibre	30 bar / 435 PSI		A
Filter paper	10 bar / 145 PSI	10, 20	N
Stainless mesh	30 bar / 435 PSI	25, 50, 100, 200	S

Note: *Collapse/burst resistance as per ISO 2941.
Other materials on request.

4 Micron Rating

3 µm	03
5 µm	05
10 µm	10
20 µm	20
25 µm	25
50 µm	50
100 µm	100
200 µm	200

Note: Other micron ratings on request.

5 Sealing Material

NBR (Buna®)	B
FPM (Viton®)	V
EPDM	E

Note: Other sealing material on request.

6 Design Code

Only for information	X
----------------------	----------

Air Filter Elements ■ Type REA

REA	-	046	L	10	B	/	X
1		2	3	4	5		6

1 Type
Air Filter Element **REA**

2 Group
Air filter for RFB 022/046/052 **046**

3 Filter Material

Filter Paper	L
--------------	----------

Note: Other materials on request.

4 Micron Rating

10µm	10
------	-----------

Note: Other micron ratings on request.

5 Sealing Material

NBR (Buna®)	B
-------------	----------

Note: Other sealing materials on request.

6 Design Code

Only for information	X
----------------------	----------

Return Line Filters ■ Type RFB

Visual Clogging Indicator

The gauge visually displays the degree of contamination of the element.
The colored segments allow quick visual checking.

green	0 ... 2,5 bar / 0 ... 36.25 PSI	Element has service life left
yellow	2,5 ... 3,0 bar / 36.25 ... 43.5 PSI	Element is contaminated and should be changed
red	>3,0 bar / >43.5 PSI	Bypass valve open, unfiltered oil passing to tank


Electrical Clogging Switch

The switch is used where an electrical signal is needed to indicate when the element needs changing. The switch can turn on a light, or shut the machine down, or any further function controlled by an electric signal. The switching pressure is 2,5 bar / 36.25 PSI and this allows the element to be changed before the bypass setting of 3 bar / 43.5 PSI is reached.


Standard type with plug connector and rubber cap. Available with DEUTSCH DT04-2P plug (industrial standard), AMP Junior Timer plug (industrial standard) and five-pin circular connector M12, A-coded, according to IEC 61076-2-101.

Maximum Voltage	Switch Type	Note: The customer / user carries the responsibility for the electrical connection.
42 V (normally open)	G42NO	
42 V (normally closed)	G42NC	
110 V (two-way contact)	G110	
230 V (two-way contact)	G230	

Visual Clogging Indicator

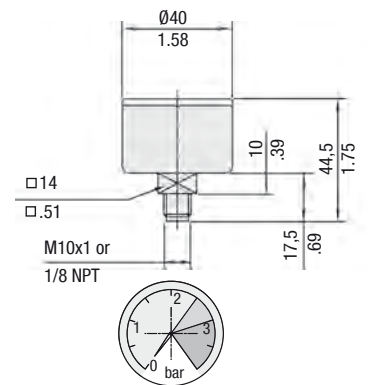

Electrical Clogging Switch




Dimensions in mm/in

Air Filter Element

Allows an effective filtration of the incoming air which avoids the infiltration of dirt particles into the hydraulic system. The standard air filter element is a 10 micron cellulose; other materials and micron ratings on request.


Air Filter



Filter Bowl with Threaded Connection

Under some circumstances such as a tall reservoir or one with oil levels which vary greatly during operation, it is necessary to extend the filter bowl so that the returning oil returns beneath the surface and does not entrain air in the process. The optional bowl with a female thread allows an extension to be fitted quite simply.











Threaded Outlet



Dimension see page C86

Return Line Filters ■ Type RFB Flow Characteristics

The following characteristics are valid for mineral oils with a density of $0,85 \text{ kg/dm}^3$ and the kinematic viscosity of $30 \text{ mm}^2/\text{s}$ (30cSt). The characteristics have been determined in accordance to ISO 3968. Multipass filter ratings have been obtained in accordance to ISO 16889. The housing pressure drop is directly proportional to the oil density. Consult STAUFF for details.

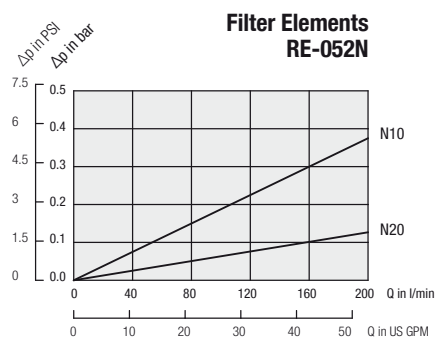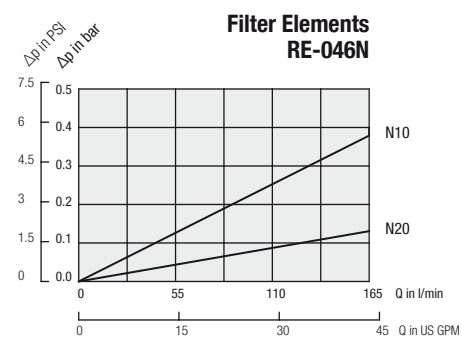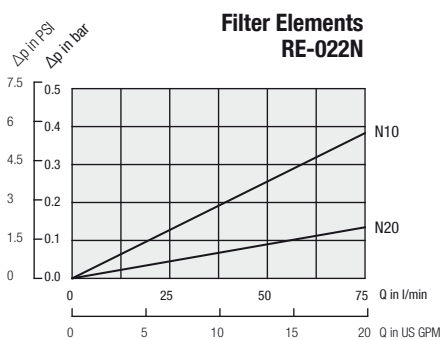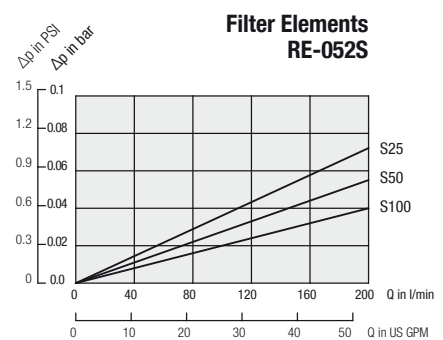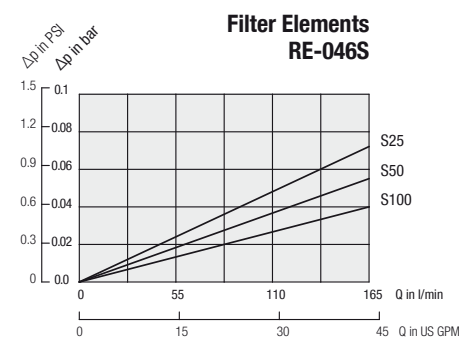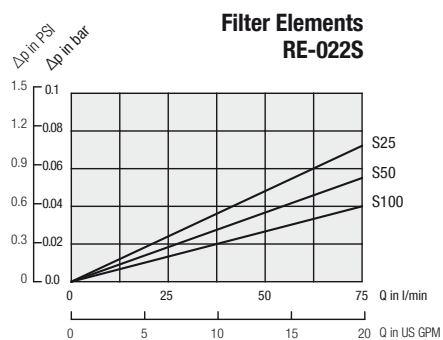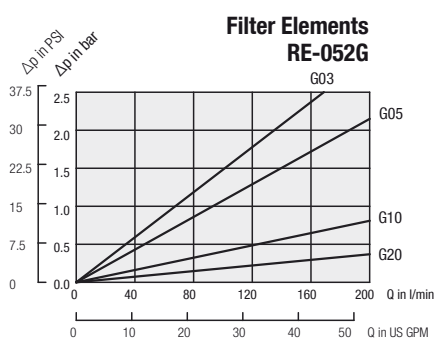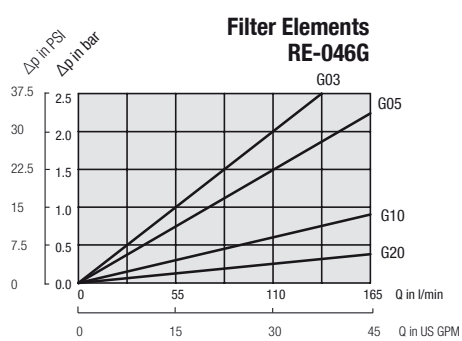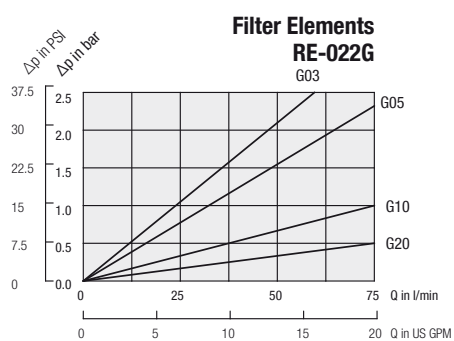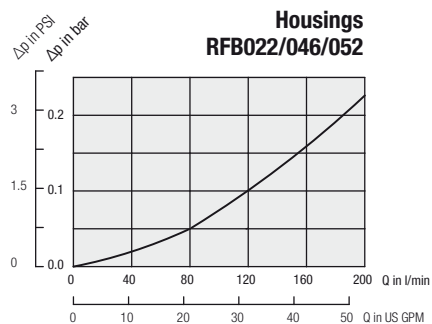

Return Line Filters ■ Type RFS



Product Description

STAUFF RFS Carbon Steel Return Line Filters are designed as tank top or in-line filters. They are mounted directly on the tank top and if 100% of the system oil is filtered, they provide the optimum removal of contaminants from the system. This provides the pump with clean oil thus reducing contaminant generated wear. The filter bowl is designed with a connection, threaded or flanged, for extending the return oil beneath the surface thus preventing the entrainment of air. A high efficiency of contaminant removal is assured by using STAUFF RE Replacement Filter Elements. The high dirt-hold capacity of STAUFF Elements ensures a long service life and as a result reduced maintenance costs.

Technical Data

Construction

- Tank Top mounting or in-line mounting

Materials

- Filter Housing: Carbon Steel
- Sealings: NBR (Buna-N®)
FPM (Viton®)
EPDM (Ethylene Propylene Diene Monomer Rubber)
Other sealing materials on request

Port Connection

- BSP
- SAE flange 3000 PSI

Flow Rating

- Up to 1135 l/min / 300 US GPM

Operating Pressure

- Max. 25 bar / 365 PSI

Proof Pressure

- Min. 37,5 bar / 545 PSI

Temperature Range

- -10 °C ... +100 °C / +14 °F ... +212 °F

Filter Elements

- Specifications see page C94

Media Compatibility

- Mineral oils, other fluids on request

Options and Accessories





Valves

- Bypass valve (integrated in the filter element) Opening pressure 3 bar ± 0,3 bar / 43.5 PSI ± 4.35 PSI
Other settings available on request

Clogging Indicators

- Visual clogging indicator 0...4 bar / 0...58 PSI coloured segments
- Electrical clogging switch, setting 2,5 bar / 36.25 PSI
Other clogging indicators available on request

Return Line Filters ■ Type RFS

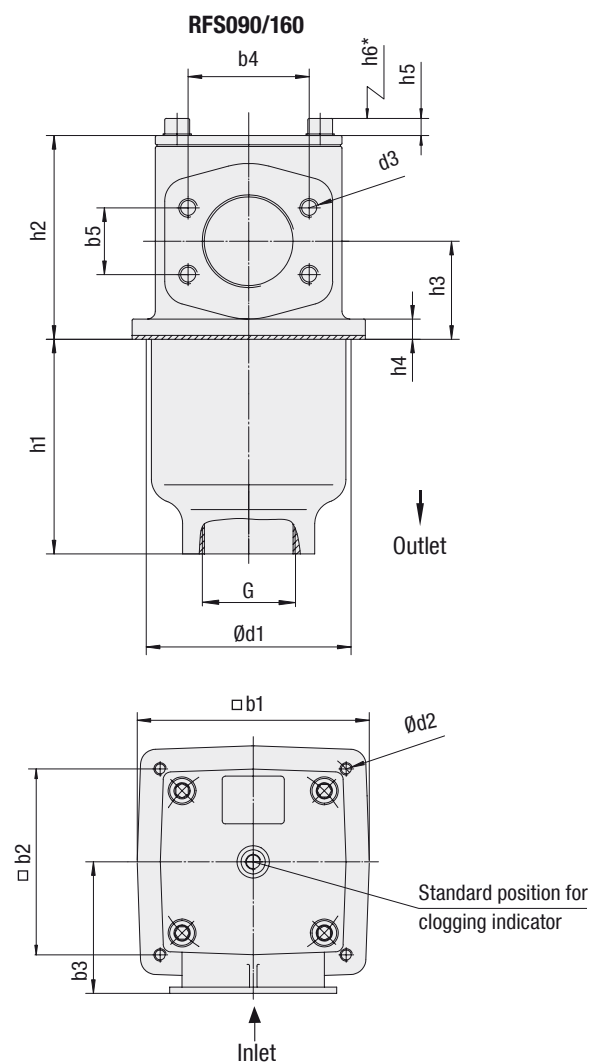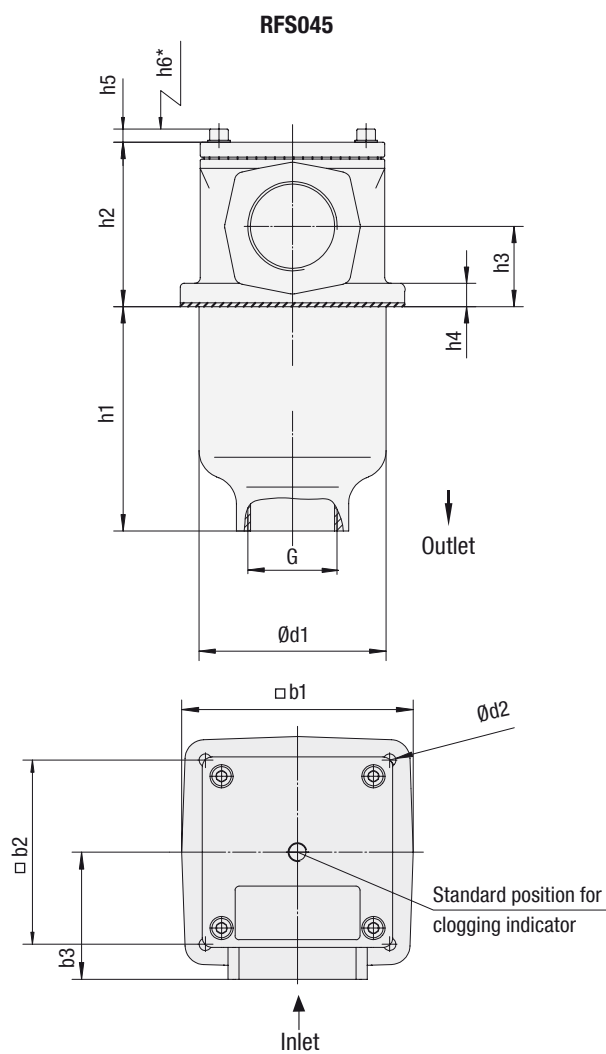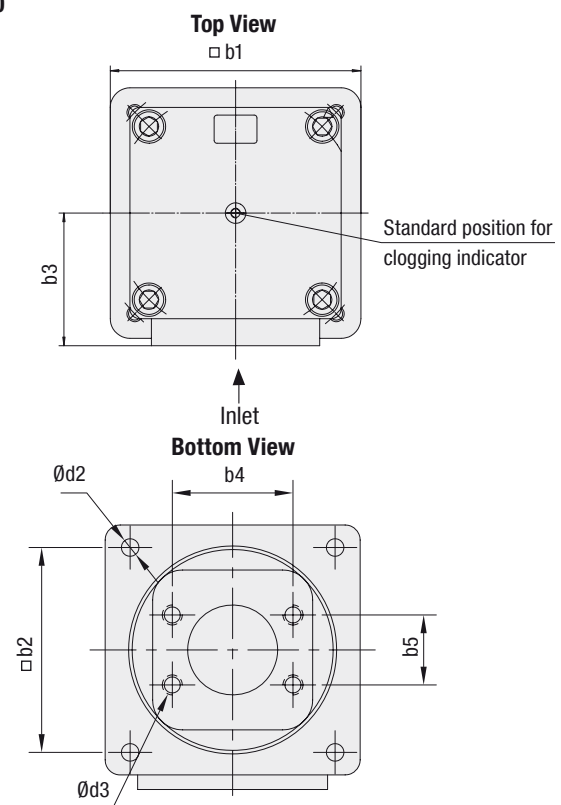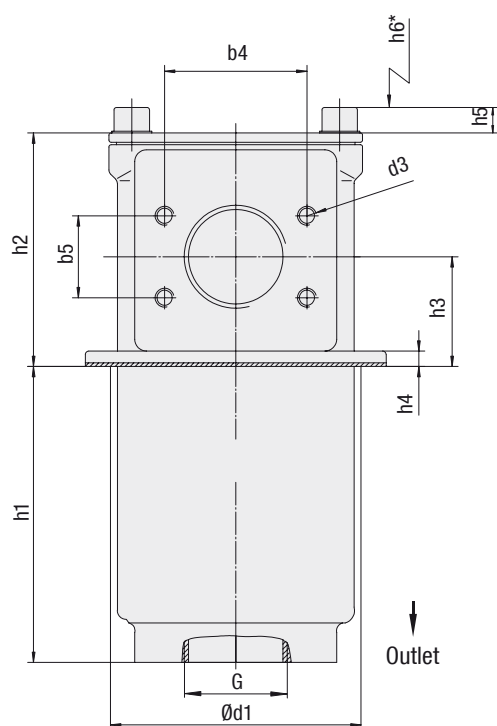**RFS250/300**

* recommended space for element change

Return Line Filters ■ Type RFS

Thread Connection		Filter Size RFS				
		045	090	160	250	300
Inlet	BSP	1-1/2	2	-	-	-
	SAE Flange	-	2	3	3-1/2	4
Outlet G	BSP	1-1/2	2	3	-	-
	SAE Flange	-	-	-	3-1/2	4

Dimensions (mm/in)	Filter Size RFS				
	045	090	160	250	300
b1	120	150	196	255	255
	4.72	5.91	7.72	10.04	10.04
b2	95,5	120	155,5	205	205
	3.76	4.72	6.12	8.07	8.07
b3	66	85	110	135	145
	2.60	3.35	4.33	5.32	5.71
b4	-	77,8	106,4	120,7	130,2
	-	3.06	4.19	4.75	5.13
b5	-	42,9	61,9	69,5	77,8
	-	1.69	2.44	2.74	3.06
d1	100	135	180	208	208
	3.94	5.32	7.09	8.19	8.19
d2	6,5	9	13,5	17,5	17,5
	.26	.35	.53	.69	.69
d3	-	M12	M16	M16	M16
	-	1/2-UNC	5/8-UNC	5/8 UNC	5/8 UNC
h1	120	138	243	251	332
	4.72	5.43	9.57	9.88	13.07
h2	88	131	167	198	241
	3.47	5.16	6.57	7.80	9.49
h3	43	63	84	93	121
	1.69	2.48	3.31	3.66	4.76
h4	13	13	13	13	13
	.51	.51	.51	.51	.51
h5	7	12	12	12	12
	.28	.47	.47	.47	.47
h6	130	180	320	350	460
	5.11	7.09	12.60	13.78	18.11

Return Line Filter Housings / Complete Filters ■ Type RFS

RFS	250	B	/	F	/	G42NC	/	D	/	F	/	X
1	2	3	4	5	6	7	8	9	10					

1 Type
Carbon Steel Return Line Filter **RFS**

2 Group

Flow	Size
170 l/min / 45 US GPM	045
340 l/min / 90 US GPM	090
600 l/min / 160 US GPM	160
945 l/min / 250 US GPM	250
1135 l/min / 300 US GPM	300

 Note: Exact flow will depend on filter element selected.
Consult technical data on pages C96 / C97.

3 Filter Material

Material	Max. Δp*collapse	Micron ratings available	Code
Without filter element	-	-	...
Inorg. glass fibre	25 bar / 363 PSI	3, 5, 10, 20	G
Stainless fibre	30 bar / 435 PSI	10, 20	A
Filter paper	10 bar / 145 PSI	10, 20	N
Stainless mesh	30 bar / 435 PSI	25, 50, 100, 200	S

 Note: *Collapse/burst resistance as per ISO 2941.
Other materials on request.

4 Micron Rating

3 µm	03
5 µm	05
10 µm	10
20 µm	20
25 µm	25
50 µm	50
100 µm	100
200 µm	200

 Note: Other micron ratings on request.

5 Sealing Material

NBR (Buna®)	B
FPM (Viton®)	V
EPDM	E

 Note: Other sealing materials on request.

6 Connection Style

Connection Style	Group					Thread Style	Code
	045	090	160	250	300		
BSP	1-1/2	2	3	-	-	-	G
SAE Flange 3000 PSI	-	-	-	3-1/2	4	metric	FM
SAE Flange 3000 PSI	-	-	-	3-1/2	4	UNC	FU

7 Clogging Indicator

	Position*	Code
Without Clogging Indicator	-	0
Visual Clogging Indicator		M
Electrical Clogging Switch 42 V, NO	1 2	G42NO
Electrical Clogging Switch 42 V, NC		G42NC
Electrical Clogging Switch 110 V, two-way contact		G110
Electrical Clogging Switch 230 V, two-way contact		G230

 Note: *Position of clogging indicator see page C92.
Without any code: assembly in the middle of the filter cover.

8 Option Clogging Indicator G42NO and G42NC

Plug connector and rubber cap	none
Deutsch plug	D
AMP plug	A
M12 x 1,5	M12

9 Outlet Style

Connection Style	Group					Thread Style	Code
	045	090	160	250	300		
BSP	1-1/2	2	3	-	-	-	G
SAE Flange 3000 PSI	-	-	-	3-1/2	4	metric	FM
SAE Flange 3000 PSI	-	-	-	3-1/2	4	UNC	FU

10 Design Code
Only for information **X**

Filter Elements ■ Type RE

RE	-	250	G	10	B	/	X
1	2	3	4	5	6		

1 Type
Filter Element Series **RE**

2 Group
According to filter housing

3 Filter Material

Material	Max. Δp*collapse	Micron ratings available	Code
Inorg. glass fibre	25 bar / 363 PSI	3, 5, 10, 20	G
Stainless fibre	30 bar / 435 PSI	10, 20	A
Filter paper	10 bar / 145 PSI	10, 20	N
Stainless mesh	30 bar / 435 PSI	25, 50, 100, 200	S

 Note: *Collapse/burst resistance as per ISO 2941.
Other materials on request.

4 Micron Rating

3 µm	03
5 µm	05
10 µm	10
20 µm	20
25 µm	25
50 µm	50
100 µm	100
200 µm	200

 Note: Other micron ratings on request.

5 Sealing Material

NBR (Buna®)	B
FPM (Viton®)	V
EPDM	E

 Note: Other sealing materials on request.

6 Design Code
Only for information **X**

Return Line Filters ■ Type RFS

Visual Clogging Indicator

The gauge visually displays the degree of contamination of the element.
The colored segments allow quick visual checking.

green	0 ... 2,5 bar / 0 ... 36.25 PSI	Element has service life left
yellow	2,5 ... 3,0 bar / 36.25 ... 43.5 PSI	Element is contaminated and should be changed
red	> 3,0 bar / > 43.5 PSI	Bypass valve open, unfiltered oil passing to tank


Electrical Clogging Switch

The switch is used where an electrical signal is needed to indicate when the element needs changing. The switch can turn on a light, or shut the machine down, or any further function controlled by an electric signal. The switching pressure is 2,5 bar / 36.25 PSI and this allows the element to be changed before the bypass setting of 3 bar / 43.5 PSI is reached.


Standard type with plug connector and rubber cap. Available with DEUTSCH DT04-2P plug (industrial standard), AMP Junior Timer plug (industrial standard) and five-pin circular connector M12, A-coded, according to IEC 61076-2-101.

Maximum Voltage	Switch Type	Note: The customer / user carries the responsibility for the electrical connection.
42 V (normally open)	G42NO	
42 V (normally closed)	G42NC	
110 V (two-way contact)	G110	
230 V (two-way contact)	G230	

Visual Clogging Indicator

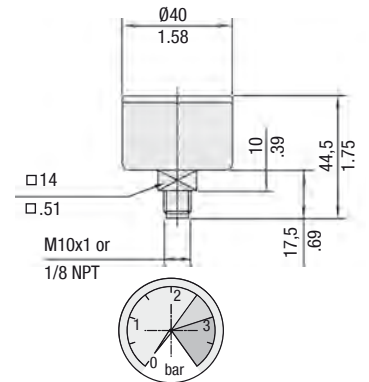

Electrical Clogging Switch



Dimensions in mm/in

Replacement Filter Elements ■ Type RE

Product Description

STAUFF RE Replacement Filter Elements are manufactured in the common filter materials such as Stainless Fibre, Stainless Mesh, Cellulose and Inorganic Glass Fibre. As standard all Replacement Elements RE have tin plated steel parts for use with aggressive media such as water glycol, upon request you also can get other materials. All Replacement Elements made by STAUFF comply with quality specifications in accordance with international standards.



Order Code

RE - 250 G 10 B / X

1 2 3 4 5 6

1 Type

Filter Element Series **RE**

2 Group

According to filter housing

Note: See order code page C94.

3 Filter Material

Material	Max. Δp*collapse	Micron ratings available	Code
Inorg. glass fibre	25 bar / 363 PSI	3, 5, 10, 20	G
Stainless fibre	30 bar / 435 PSI		A
Filter paper	10 bar / 145 PSI	10, 20	N
Stainless mesh	30 bar / 435 PSI	25, 50, 100, 200	S

Note: *Collapse/burst resistance as per ISO 2941.
Other materials on request.

4 Micron Rating

3 µm	03
5 µm	05
10 µm	10
20 µm	20
25 µm	25
50 µm	50
100 µm	100
200 µm	200

Note: Other micron ratings on request.

5 Sealing Material

NBR (Buna®)	B
FPM (Viton®)	V
EPDM	E










Note: Other sealing materials on request.

6 Design Code

Only for information **X**







Return Line Filters ■ Type RFS Flow Characteristics


The following characteristics are valid for mineral oils with a density of $0,85 \text{ kg/dm}^3$ and the kinematic viscosity of $30 \text{ mm}^2/\text{s}$ (30cSt). The characteristics have been determined in accordance to ISO 3968. Multipass filter ratings have been obtained in accordance to ISO 16889. The housing pressure drop is directly proportional to the oil density. Consult STAUFF for details.

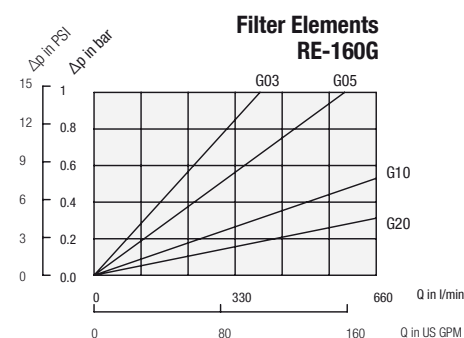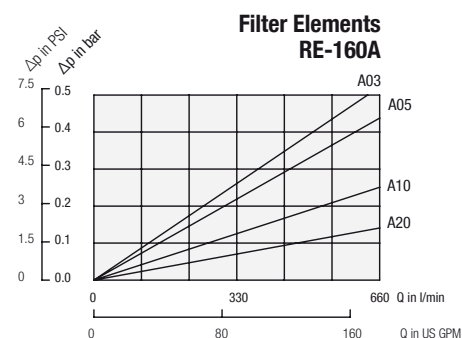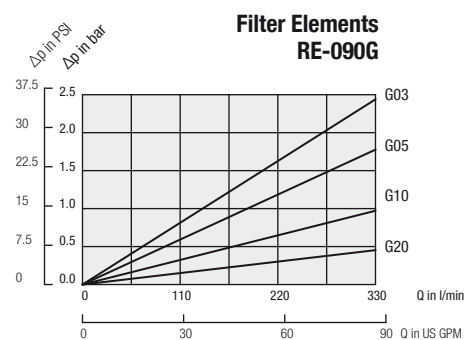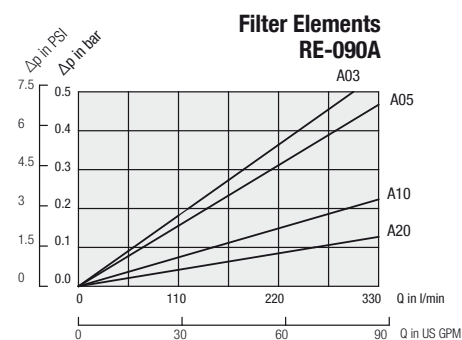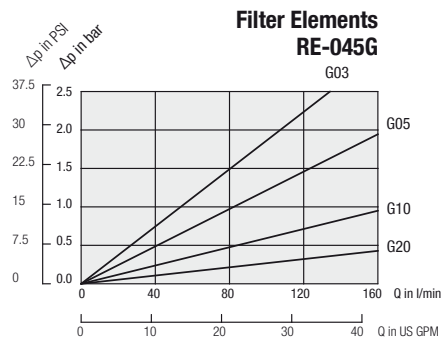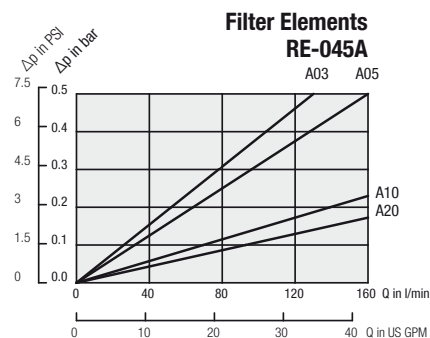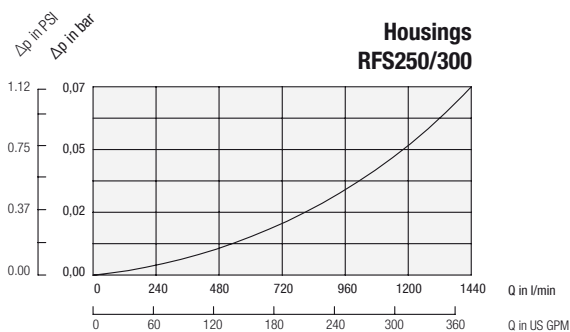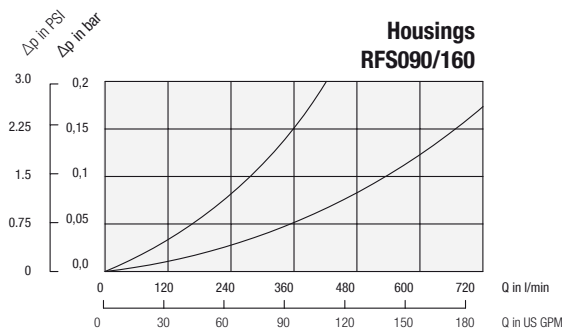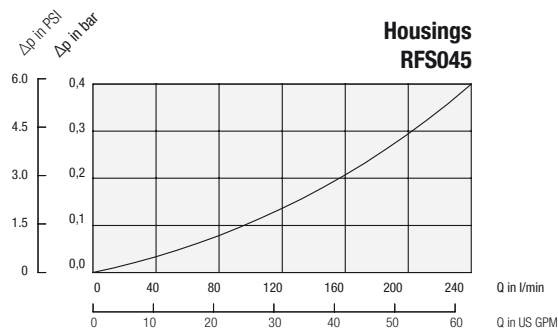

Return Line Filters ■ Type RFS Flow Characteristics

The following characteristics are valid for mineral oils with a density of 0,85 kg/dm³ and the kinematic viscosity of 30 mm²/s (30cSt). The characteristics have been determined in accordance to ISO 3968. Multipass filter ratings have been obtained in accordance to ISO 16889. The housing pressure drop is directly proportional to the oil density. Consult STAUFF for details.

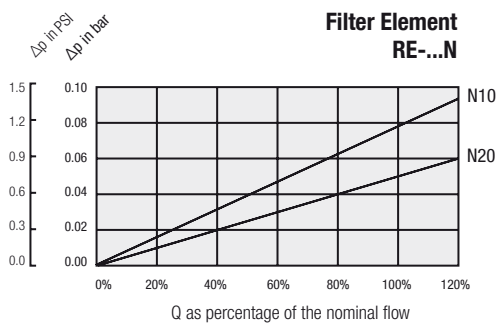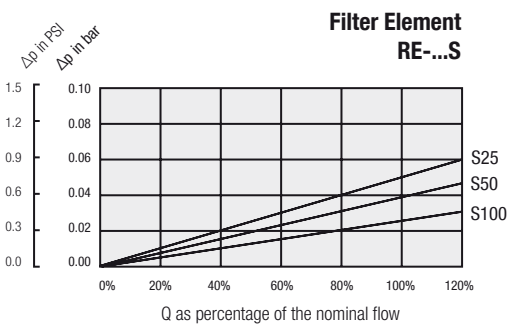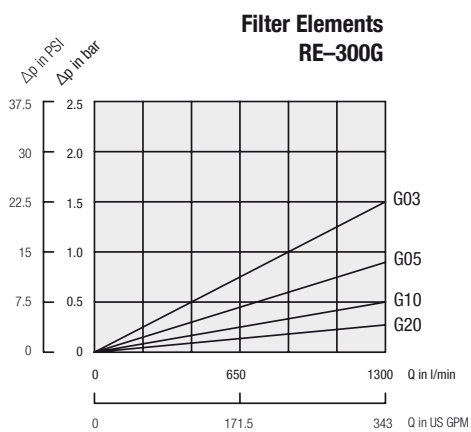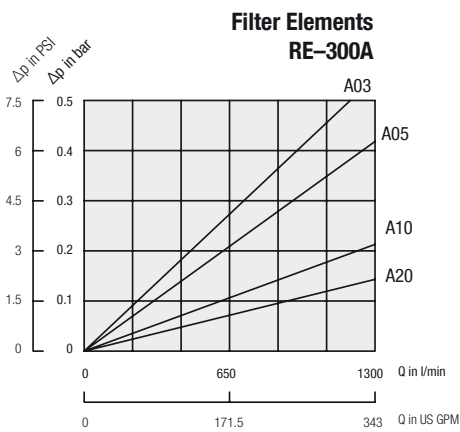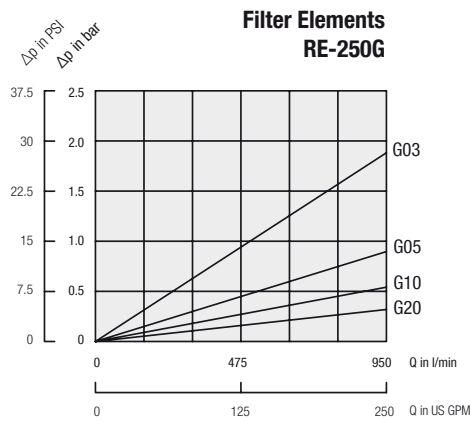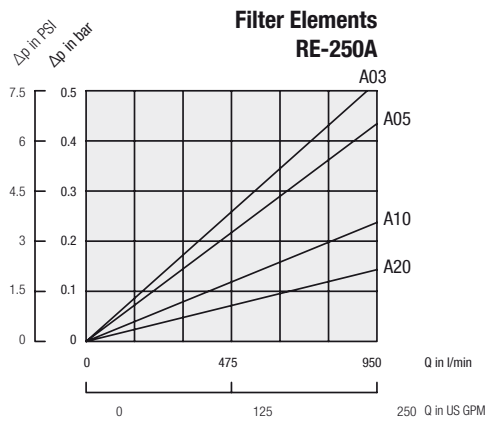

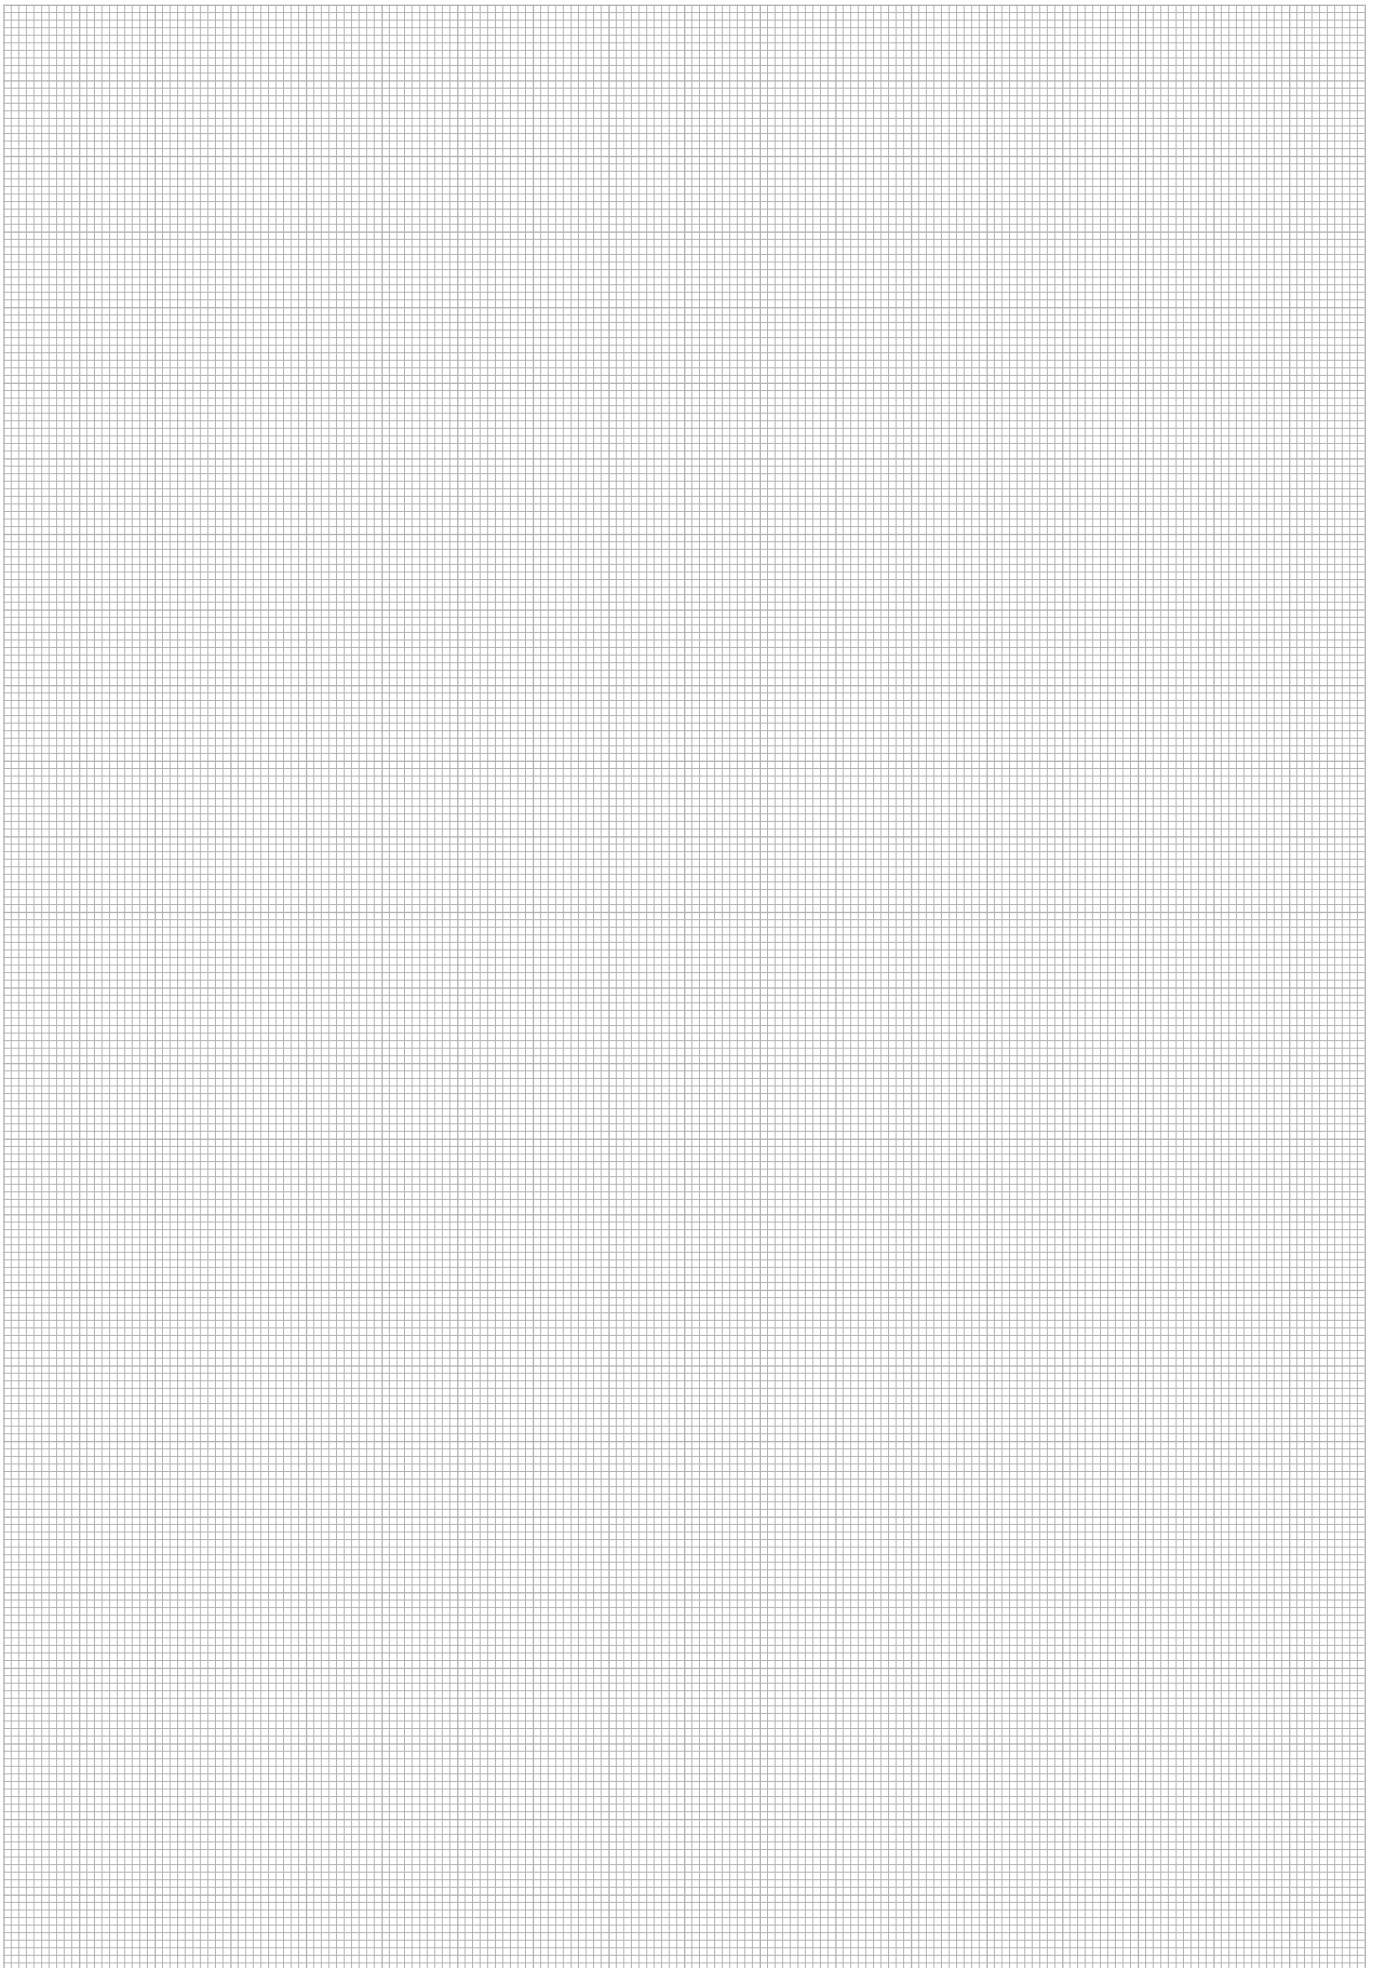

Return Line Filters ■ Type RTF10/25



Product Description

STAUFF RTF10/25 Return Line Filters are designed as tank top filters with a maximum operating pressure of 3,4 bar / 49 PSI.

Technical Data

Construction

- Tank Top flange mounting

Materials

- Filter head: Aluminum
- Filter bowl: Polyamide
- Sealings: NBR (Buna-N®)
FPM (Viton®)
Other sealing materials on request

Port Connection

- BSP
- NPT
- SAE O-ring thread

Flow Rating

- Up to 95 l/min / 25 US GPM

Operating Pressure

- Max. 3,4 bar / 49 PSI

Burst Pressure

- Min. 10 bar / 145 PSI

Temperature Range

- -25 °C ... +95 °C / -13 °F ... +203 °F

Filter Elements

- Specifications see page C102

Media Compatibility

- Mineral oils, other fluids on request

Options and Accessories


Valve

- Bypass valve: Opening pressure 1,7 bar / 25 PSI
(integrated in the filter element)
Other settings available on request

Clogging Indicators

- Visual clogging indicator, coloured segments
- Electrical clogging switch, adjustable
Other clogging indicators available on request

Return Line Filters ■ Type RTF10/25

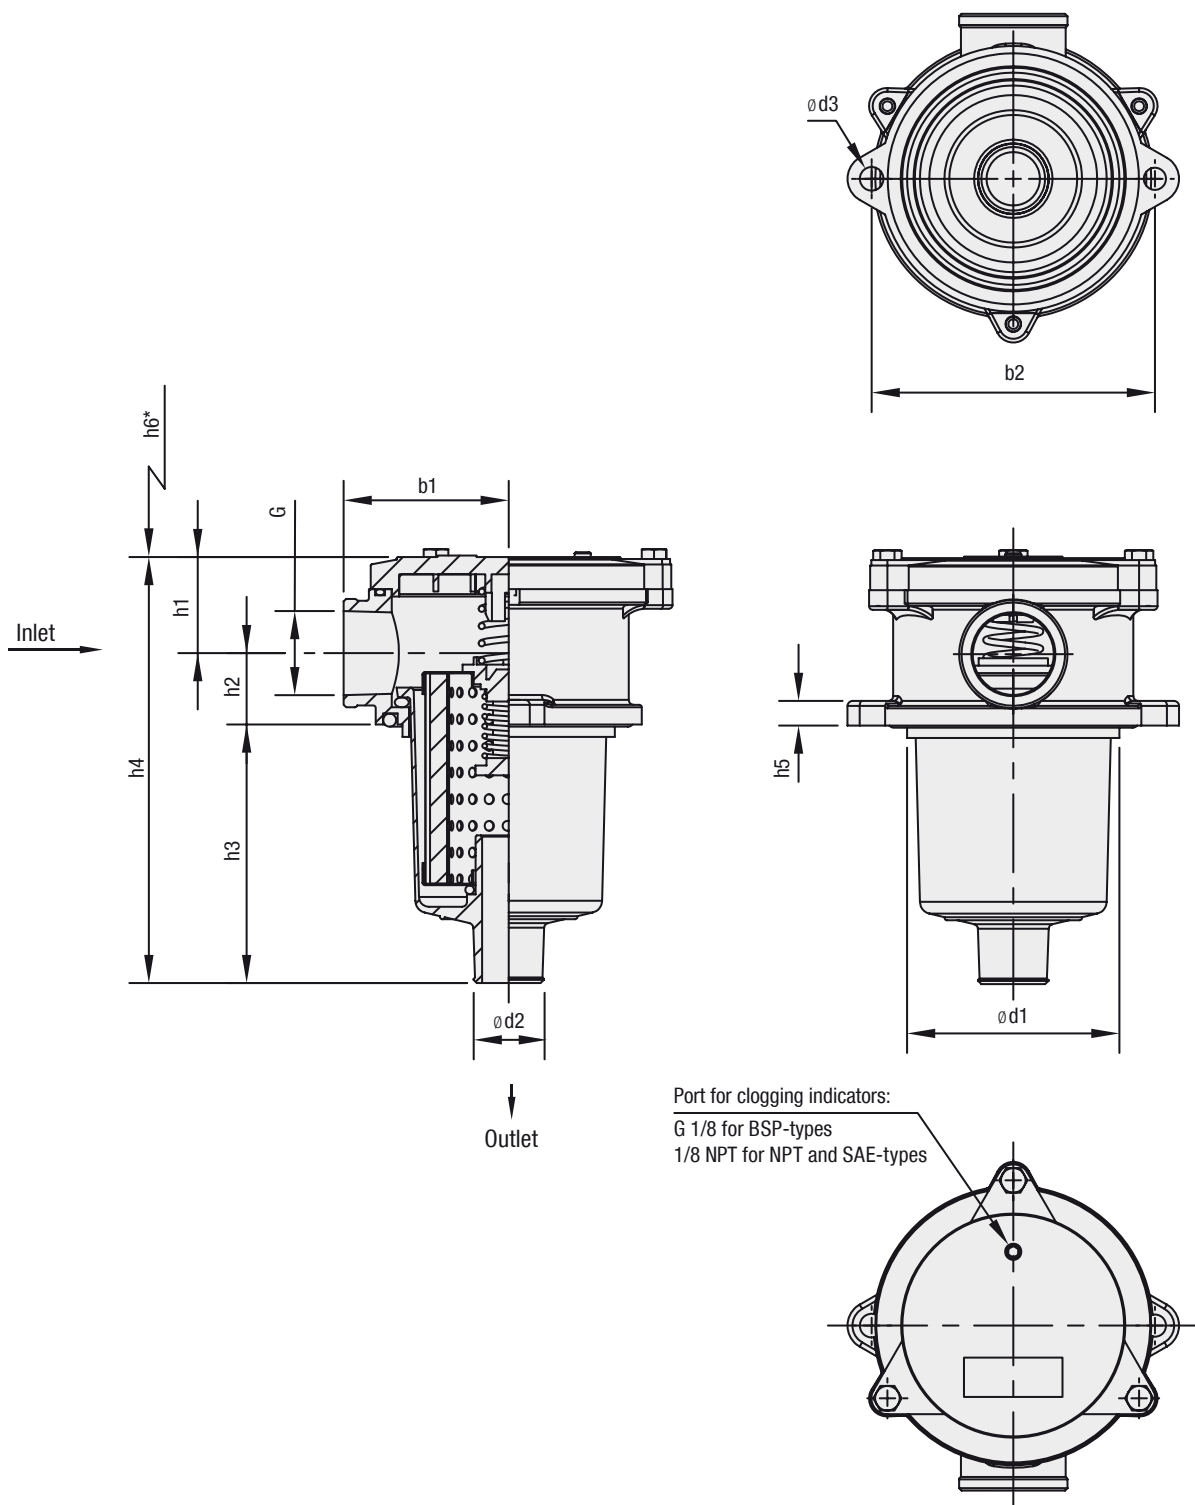

* recommended space for element change

Return Line Filters ■ Type RTF10/25

Thread Connection G	Filter Size RTF		
	10S1	25S1	25S2
BSP	1/2	1	1
NPT	1/2	1	1
SAE O-ring	-	1-5/16-12	1-5/16-12

Dimensions (mm/in)	Filter Size RTF		
	10S1	25S1	25S2
h1	26	34	34
	1.02	1.34	1.34
h2	21	29	29
	.83	1.14	1.14
h3	88	103	151
	3.46	4.05	5.95
h4	136	166	212
	5.35	6.53	8.35
h5	8	10	10
	.32	.39	.39
h6	110	130	175
	4.33	5.12	6.89
b1	50	67	67
	1.97	2.64	2.64
b2	90	115	115
	3.54	4.52	4.52
d1	66	86	86
	2.60	3.39	3.39
d2	24	28	28
	.94	1.10	1.10
d3	7	9	9
	.28	.35	.35
Weight (kg/lbs)	0,45	0,9	1
	1	2	2.2

Return Line Filter Housings / Complete Filters ■ Type RTF10/25

RTF 25 ... B / N / S2 / V / X

1 2 3 4 5 6 7 8 9

1 Type

Return Line Filter **RTF**

2 Group

Flow	Size
38 l/min / 10 US GPM	10
95 l/min / 25 US GPM	25

Note: Exact flow will depend on filter element selected.
Consult technical data on pages C119.

3 Filter Material

Material	Max. Δp*collapse	Micron ratings available	Code
Without filter element	-	-	...
Inorg. glass fibre	3 bar / 43.5 PSI	10, 25	G
Filter paper	3 bar / 43.5 PSI	10, 25	D

*Note: Collapse/burst resistance as per ISO 2941
Other materials on request

4 Micron Rating

10 μm	10
25 μm	25

Note: Other micron ratings on request

5 Sealing Material

NBR (Buna®)	B
FPM (Viton®)	V

Note: Other sealing materials on request

6 Connection Style

Connection Style	Group		Code
	10	25	
BSP	1/2	1	B
NPT	1/2	1	N
SAE O-ring Thread	-	1-5/16-12	S

7 Length

Bowl Length 1	S1
Bowl Length 2	S2

Note: RTF 10 size available in bowl length 1 only.

8 Clogging Indicator

Without clogging indicator	none
Visual clogging indicator	V
Electrical clogging indicator	E

Note: See pages C100 and C121 for more details on indicator ports and types.

9 Design Code

Only for information	X
----------------------	----------

Filter Elements ■ Type RTE

RTE - 25 D 10 B / S2 / X

1 2 3 4 5 6 7

1 Type

Filter Element Series **RTE**

2 Group

According to filter housing

3 Filter Material

Material	Max. Δp*collapse	Micron ratings available	Code
Inorg. glass fibre	3 bar / 43.5 PSI	10, 25	G
Filter paper	3 bar / 43.5 PSI	10, 25	D

*Note: Collapse/burst resistance as per ISO 2941
Other materials on request

4 Micron Rating

10 μm	10
25 μm	25

Note: Other micron ratings on request

5 Sealing Material

NBR (Buna®)	B
FPM (Viton®)	V

Note: Other sealing materials on request

6 Length

Bowl Length 1	S1
Bowl Length 2	S2

Note: RTE 10 size available in bowl length 1 only.

7 Design Code

Only for information	X
----------------------	----------

Return Line Filters ■ Type RTF20



Product Description

STAUFF RTF20 Return Line Filters are designed as tank top filters with a maximum operating pressure of 10 bar / 145 PSI and flow rates up to 115 l/min / 30 US GPM. The filter bowl is designed to return the oil beneath the surface thus preventing entrainment of air. RTF20 series compact design and integral breather make them ideal for mobile hydraulic applications.

Technical Data

Construction

- Tank Top flange mounting

Materials

- Filter head: Aluminum
- Filter bowl & cap: Polyamide
- Sealings: NBR (Buna-N®)
FPM (Viton®)
Other sealing materials on request

Port Connection

- BSP
- NPT
- SAE O-ring thread

Flow Rating

- Up to 115 l/min / 30 US GPM

Operating Pressure

- Max. 10 bar / 145 PSI

Burst Pressure

- Min. 30 bar / 435 PSI

Temperature Range

- -25 °C ...+95 °C / -13 °F ... +203 °F

Integrated Breather

- Filter paper 10 µm
- Filter paper 40 µm

Filter Elements

- Specifications see page C106

Media Compatibility

- Mineral oils, other fluids on request

Options and Accessories


Valve

- Bypass valve: Opening pressure 1,7 bar / 25 PSI
(integrated in the filter element) Other settings available on request

Clogging Indicators

- Visual clogging indicator, coloured segments
- Electrical clogging switch, adjustable
Other clogging indicators available on request

Return Line Filters ■ Type RTF20

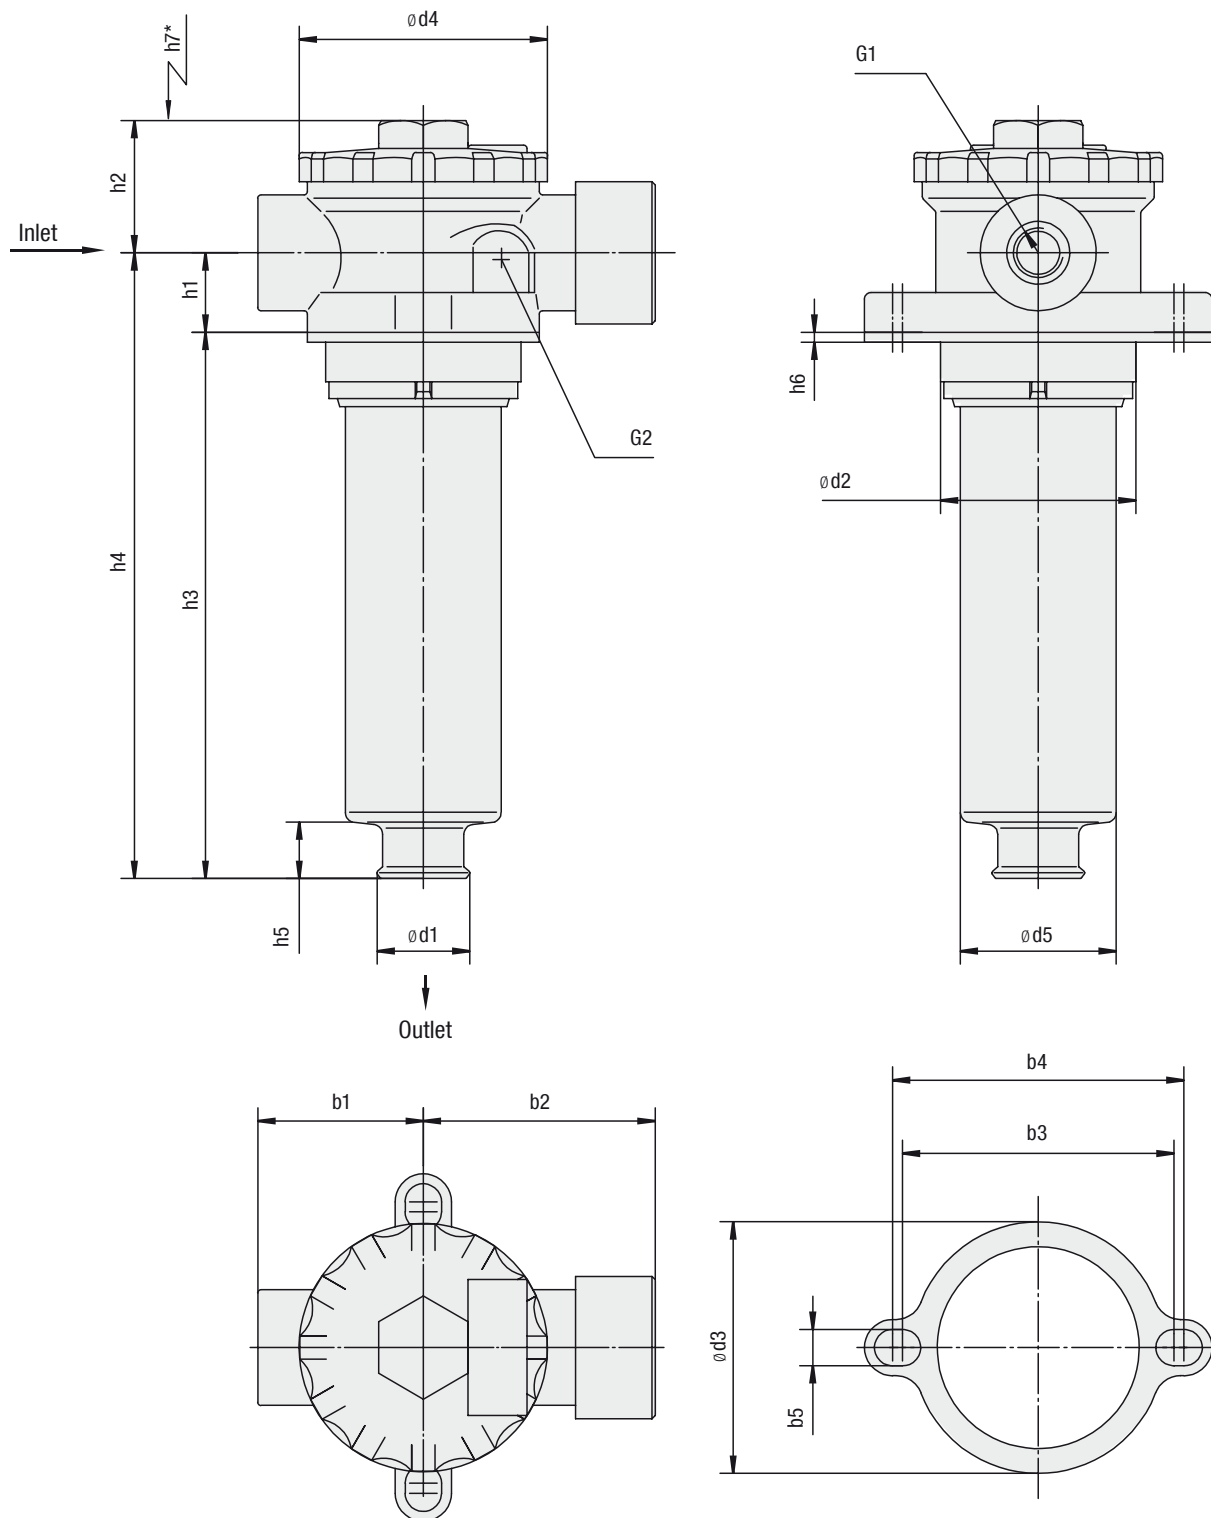

* recommended space for element change

Return Line Filters ■ Type RTF20

Thread Connection G1	Filter Size RTF	
	020	
BSP	1/2	3/4
NPT	1/2	3/4
SAE Thread	3/4-16	1-1/16

Dimensions (mm/in)	Filter Size RTF
	020
b1	50 1.97
b2	70 2.76
b3	82 3.23
b4	88 3.46
b5	11 .43
d1	28 1.10
d2*	Min. 60 / Max. 63 Min. 2.36 / Max. 2.48
d3	77 3.03
d4	75 2.95
d5	48 1.89
h1	24 .94
h2	37,5 1.48
h3	178 7.01
h4	202 7.95
h5	16 .63
h6	2 .07
h7	210 8.27
G2	G1/8 or 1/8 NPT

* recommended diameter for mounting hole

Return Line Filter Housings / Complete Filters ■ Type RTF20

1	2	3	4	5	6	7	8	9	10					
RTF	20	D	10	B	/	N1	/	V	/	L10	/	D	/	X

1 Type
Return Line Filter **RTF20**

2 Group
Flow **Size**
115 l/min / 30 US GPM **20**
Note: Exact flow will depend on filter element selected.
Consult technical data on pages C119 / C120.

3 Filter Material

Material	Max. Δp*collapse	Micron ratings available	Code
Without filter element	-	-	...
Inorg. glass fibre	25 bar / 363 PSI	6, 10, 20	G
Filter paper	10 bar / 145 PSI	10	D

*Note: Collapse/burst resistance as per ISO 2941
Other materials on request

4 Micron Rating

6 μm	06
10 μm	10
20 μm	20

Note: Other micron ratings on request

5 Sealing Material

NBR (Buna®)	B
FPM (Viton®)	V

Note: Other sealing materials on request

6 Connection Style

Connection Style	Thread	Code
BSP	1/2	B1
BSP	3/4	B2
NPT	1/2	N1
NPT	3/4	N2
SAE O-ring Thread	3/4-16	S1
SAE O-ring Thread	1-1/16-12	S2

7 Clogging Indicator

No clogging indicator	0
Visual clogging indicator	V
Electrical clogging indicator	E

Note: See pages C104 and C121 for more details on indicator ports and types.

8 Breather

10 μm Filter Paper	L10
40 μm Filter Paper	L40

9 Dipstick

Without dipstick	none
With dipstick	D

10 Design Code
Only for information **X**

Filter Elements ■ Type RTE

1	2	3	4	5	6
RTE	-	20	D	10	B / X

1 Type
Filter Element Series **RTE**

2 Group
According to filter housing

3 Filter Material

Material	Max. Δp*collapse	Micron ratings available	Code
Inorg. glass fibre	25 bar / 363 PSI	6, 10, 20	G
Filter paper	10 bar / 145 PSI	10	D

*Note: Collapse/burst resistance as per ISO 2941
Other materials on request

4 Micron Rating

6 μm	06
10 μm	10
20 μm	20

Note: Other micron ratings on request

5 Sealing Material

NBR (Buna®)	B
FPM (Viton®)	V

Note: Other sealing materials on request

6 Design Code
Only for information **X**

Air Filter Elements ■ Type RTEA

1	2	3	4	5	6
RTEA	-	020	L	10	B / X

1 Type
Air Filter Element Series **RTEA**

2 Group
Air filter for RTF20

3 Filter Material
Filter Paper **L**
Note: Other materials on request

4 Micron Rating
10 μm **10**
Note: Other micron ratings on request

5 Sealing Material
NBR (Buna®) **B**
Note: Other sealing materials on request

6 Design Code
Only for information **X**

Return Line Filters ■ Type RTF40



Product Description

STAUFF RTF40 Return Line Filters are designed as tank top filters with a maximum operating pressure of 6,9 bar / 100 PSI. The filter bowl is designed to return the oil beneath the surface thus preventing entrainment of air.

Technical Data

Construction

- Tank Top flange mounting

Materials

- Filter head: Aluminum
- Filter bowl: Bowl length 1: Polyamide
Bowl length 2: Steel
- Sealings: NBR (Buna-N®)
Other sealing materials on request

Port Connection

- BSP
- NPT
- SAE O-ring thread
- SAE flange

Flow Rating

- Up to 378 l/min / 100 US GPM

Operating Pressure

- Max. 6,9 bar / 100 PSI

Temperature Range

- -25 °C ...+95 °C / -13 °F ... +203 °F

Filter Elements

- RTE-47 with integrated bypass valve, single stack length
- RTE-48 bypass valve integrated in the filter head, equivalent to the HF-4 elements, single and double stack lengths
- RTE-49 bypass valve integrated in the filter head, single and double stack lengths
- Specifications see page C110

Media Compatibility

- Mineral oils, other fluids on request

Options and Accessories


Valve

- Bypass valve: Opening pressures 1 bar / 14.5 PSI ±10 % or
1,7 bar / 25 PSI ±10 %
RTF47: Bypass intergrated in the filter element
RTF48/49: Bypass integrated in the filter head

Clogging Indicators

- Visual clogging indicator, coloured segments
- Electrical clogging switch, adjustable
Other clogging indicators available on request


Return Line Filters ■ Type RTF40

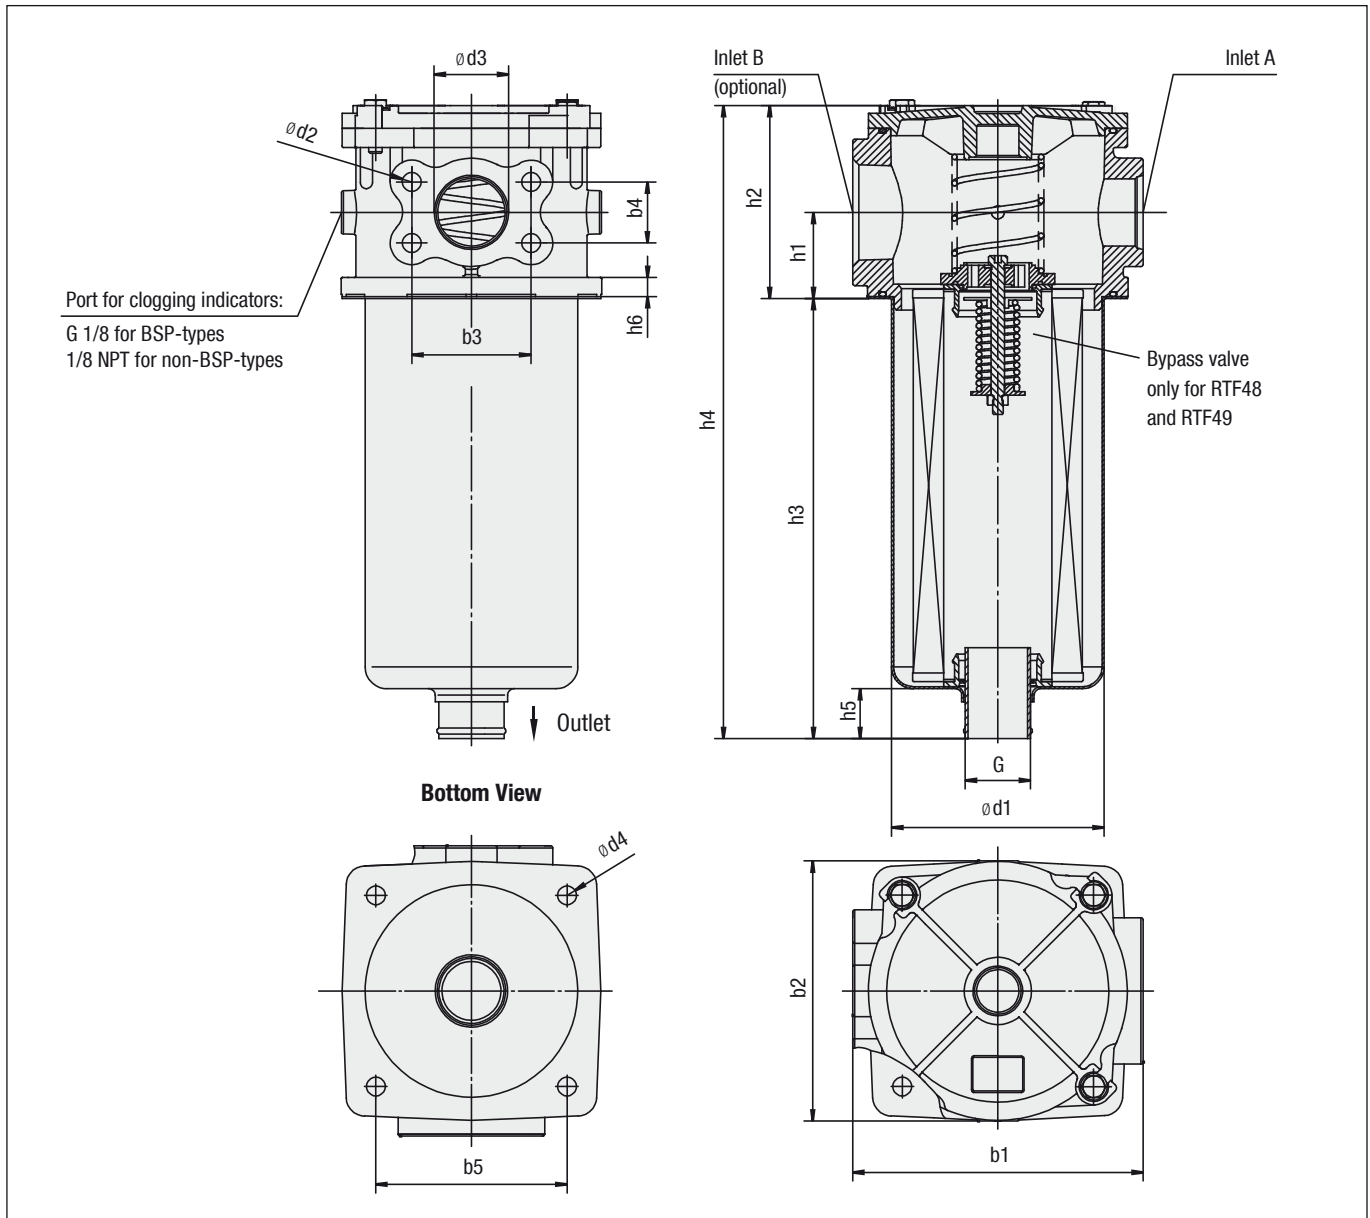


Filter Elements ■ Types RTE-47 / RTE-48 / RTE-49

RTE-47

- with integrated bypass valve
- single stack length

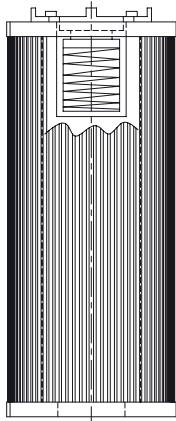**RTE-48**


- bypass valve integrated in the filter head
- equivalent to the HF-4 elements
- single and double stack lengths

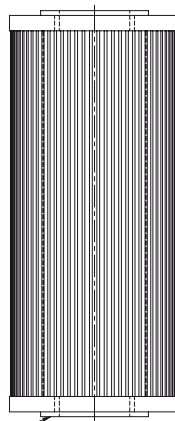

Seal: NBR (Buna®)


RTE-49

- bypass valve integrated in the filter head
- single and double stack lengths

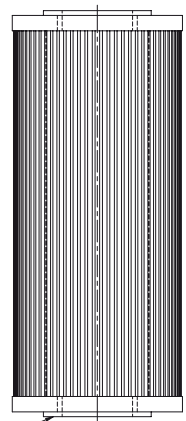

Seal: NBR (Buna®)

Return Line Filters ■ Type RTF40

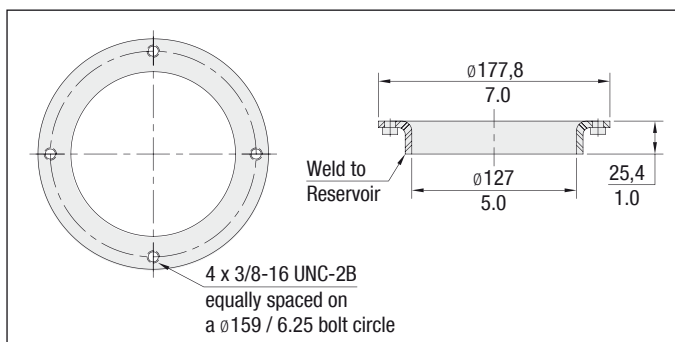

RTF40 Series Weld Ring WR-40

The WR-40 weld ring is welded directly to the hydraulic reservoir, eliminating the need for drilling and tapping mounting holes in the reservoir.

Material: Carbon Steel

Thread Connection Combinations	Filter Size RTF			
	4...S1		4...S2	
	Inlet A	Inlet B	Inlet A	Inlet B
BSP (B)	1-1/4 and 1-1/2 SAE Flange	None	1-1/4 and 1-1/2 SAE Flange	None
BSP (BB)	1-1/4 and 1-1/2 SAE Flange	1-1/4	1-1/4 and 1-1/2 SAE Flange	1-1/4
NPT (N)	1-1/4 and 1-1/2 SAE Flange	None	1-1/4 and 1-1/2 SAE Flange	None
NPT (NN)	1-1/4 and 1-1/2 SAE Flange	1-1/4	1-1/4 and 1-1/2 SAE Flange	1-1/4
NPT (M)	1-1/2	None	1-1/2	None
NPT (MN)	1-1/2	1-1/4	1-1/2	1-1/4
NPT (MM)	1-1/2	1-1/2	1-1/2	1-1/2
SAE (S)	1-5/8-12	None	1-5/8-12	None
SAE (SS)	1-5/8-12	1-5/8-12	1-5/8-12	1-5/8-12
SAE (ST)	1-5/8-12	1-7/8-12	1-5/8-12	1-7/8-12
SAE (SU)	1-5/8-12	2-1/2-12	1-5/8-12	2-1/2-12
SAE (TT)	1-7/8-12	1-7/8-12	1-7/8-12	1-7/8-12
Combination SAE & NPT (S0)	1-5/8-12	2	1-5/8-12	2

Dimensions (mm/in)	Filter Size RTF	
	4...S1	4...S2
h1	50	50
	1.97	1.97
h2	112	112
	4.41	4.41
h3	263	475
	10.35	18.70
h4	385	587
	15.16	23.11
h5	21	38
	.83	1.50
h6	11	11
	.43	.43
b1	170	170
	6.70	6.70
b2	152	152
	5.98	5.98
b3	69.9	69.9
	2.75	2.75
b4	35.6	35.6
	1.40	1.40
b5	112	112
	4.41	4.41
d1	122	126
	4.80	4.96
d2	M12 or 1/2-13 UN	M12 or 1/2-13 UN
d3	38,1	38,1
	1.50	1.50
d4	11	11
	.43	.43
G	G1-1/2 or 1-1/2 NPT	G1-1/2 or 1-1/2 NPT

Return Line Filter Housings / Complete Filters ■ Type RTF40

RTF **48** **...** **...** **B** / **N** / **25** / **S2** / **V** / **X**

1 2 3 4 5 6 7 8 9 10

1 Type

Return Line Filter **RTF**

2 Group

Flow	Size
190 l/min / 50 US GPM	47
190 l/min / 50 US GPM	48
190 l/min / 50 US GPM	49

Note: Exact flow will depend on filter element selected.
Consult technical data on pages C119 / C120.
For element length 2 (only RTF48 / RTF49) please double relating flow values.

3 Filter Material

Material	Max. Δp *collapse	Micron ratings available	Code
Without filter element	-	-	...
Inorg. glass fibre	10 bar / 145 PSI	3, 5, 10, 25	G
Filter paper	10 bar / 145 PSI	3, 10, 20, 25	D

*Note: Collapse/burst resistance as per ISO 2941
Other materials on request

4 Micron Rating

3 μ m	03
5 μ m	05
10 μ m	10
20 μ m	20
25 μ m	25

Note: Other micron ratings on request

5 Sealing Material

NBR (Buna®) **B**
Note: Other sealing materials on request

6 Connection Style

Connection Style	Group Port A	Port B	Code
BSP	1-1/4 and 1-1/2 SAE Flange	None	B
BSP	1-1/4 and 1-1/2 SAE Flange	1-1/4	BB
NPT	1-1/4 and 1-1/2 SAE Flange	None	N
NPT	1-1/4 and 1-1/2 SAE Flange	1-1/4	NN
NPT	1-1/2	None	M
NPT	1-1/2	1-1/4	MN
NPT	1-1/2	1-1/2	MM
SAE	1-5/8-12	None	S
SAE	1-5/8-12	1-5/8-12	SS
SAE	1-5/8-12	1-7/8-12	ST
SAE	1-5/8-12	2-1/2-12	SU
SAE	1-7/8-12	1-7/8-12	TT
Combination NPT & SAE	1-5/8-12	2	S0

7 Valve

No bypass	00
1 bar / 15 PSI	15
1,7 bar / 24.6 PSI	25

8 Length

Bowl Length 1 (1 element)	S1
Bowl Length 2 (2 elements)	S2

Note: RTF 47 size available in S1 bowl length only.

9 Clogging Indicator

No clogging indicator	ohne
Visual clogging indicator	V
Electrical clogging indicator	E

Note: See pages C108 and C121 for more details on indicator ports and options.

10 Design Code

Only for information	X
----------------------	----------

Filter Elements ■ Type RTE

RTE - **48** **D** **10** **B** / **X**

1 2 3 4 5 6

1 Type

Filter Element Series **RTE**

2 Group

According to filter housing

3 Filter Material

Material	Max. Δp *collapse	Micron ratings available	Code
Inorg. glass fibre	10 bar / 145 PSI	3, 5, 10, 25	G
Filter paper	10 bar / 145 PSI	3, 10, 20, 25	D

*Note: Collapse/burst resistance as per ISO 2941
Other materials on request

4 Micron Rating

3 μ m	03
5 μ m	05
10 μ m	10
20 μ m	20
25 μ m	25

Note: Other micron ratings on request

5 Sealing Material

NBR (Buna®) **B**
Note: Other sealing materials on request

6 Design Code

Only for information	X
----------------------	----------

Return Line Filters ■ Type RTF50



Product Description

STAUFF RTF50 Return Line Filters are designed for tank top applications with a maximum pressure of 6,9 bar / 100 PSI. The filter bowl is designed to return the oil beneath the surface thus preventing entrainment of air. The RTF58 elements interchange with the popular "K" series and RTF59 elements interchange with the "RE-409" series elements.

Technical Data

Construction

- Tank Top flange mounting

Materials

- Filter head: Aluminum
- Filter bowl: Bowl length 1: Polyamide
Bowl length 2: Steel
- Sealings: NBR (Buna-N®)
Other sealing materials on request

Port Connection

- BSP
- NPT
- SAE O-ring thread

Flow Rating

- Up to 379 l/min / 100 US GPM

Operating Pressure

- Max. 6,9 bar / 100 PSI

Temperature Range

- -25 °C ...+95 °C / -13 °F ... +203 °F

Filter Elements

- Specifications see page C114

Media Compatibility

- Mineral oils, other fluids on request

Options and Accessories


Valve

- Bypass valve: Opening pressures 1 bar / 14.5 PSI $\pm 10\%$ or 1,7 bar / 25 PSI $\pm 10\%$
Other settings available on request


Clogging Indicators

- Visual clogging indicator, coloured segments
- Electrical clogging switch, adjustable
Other clogging indicators available on request

Return Line Filters ■ Type RTF50

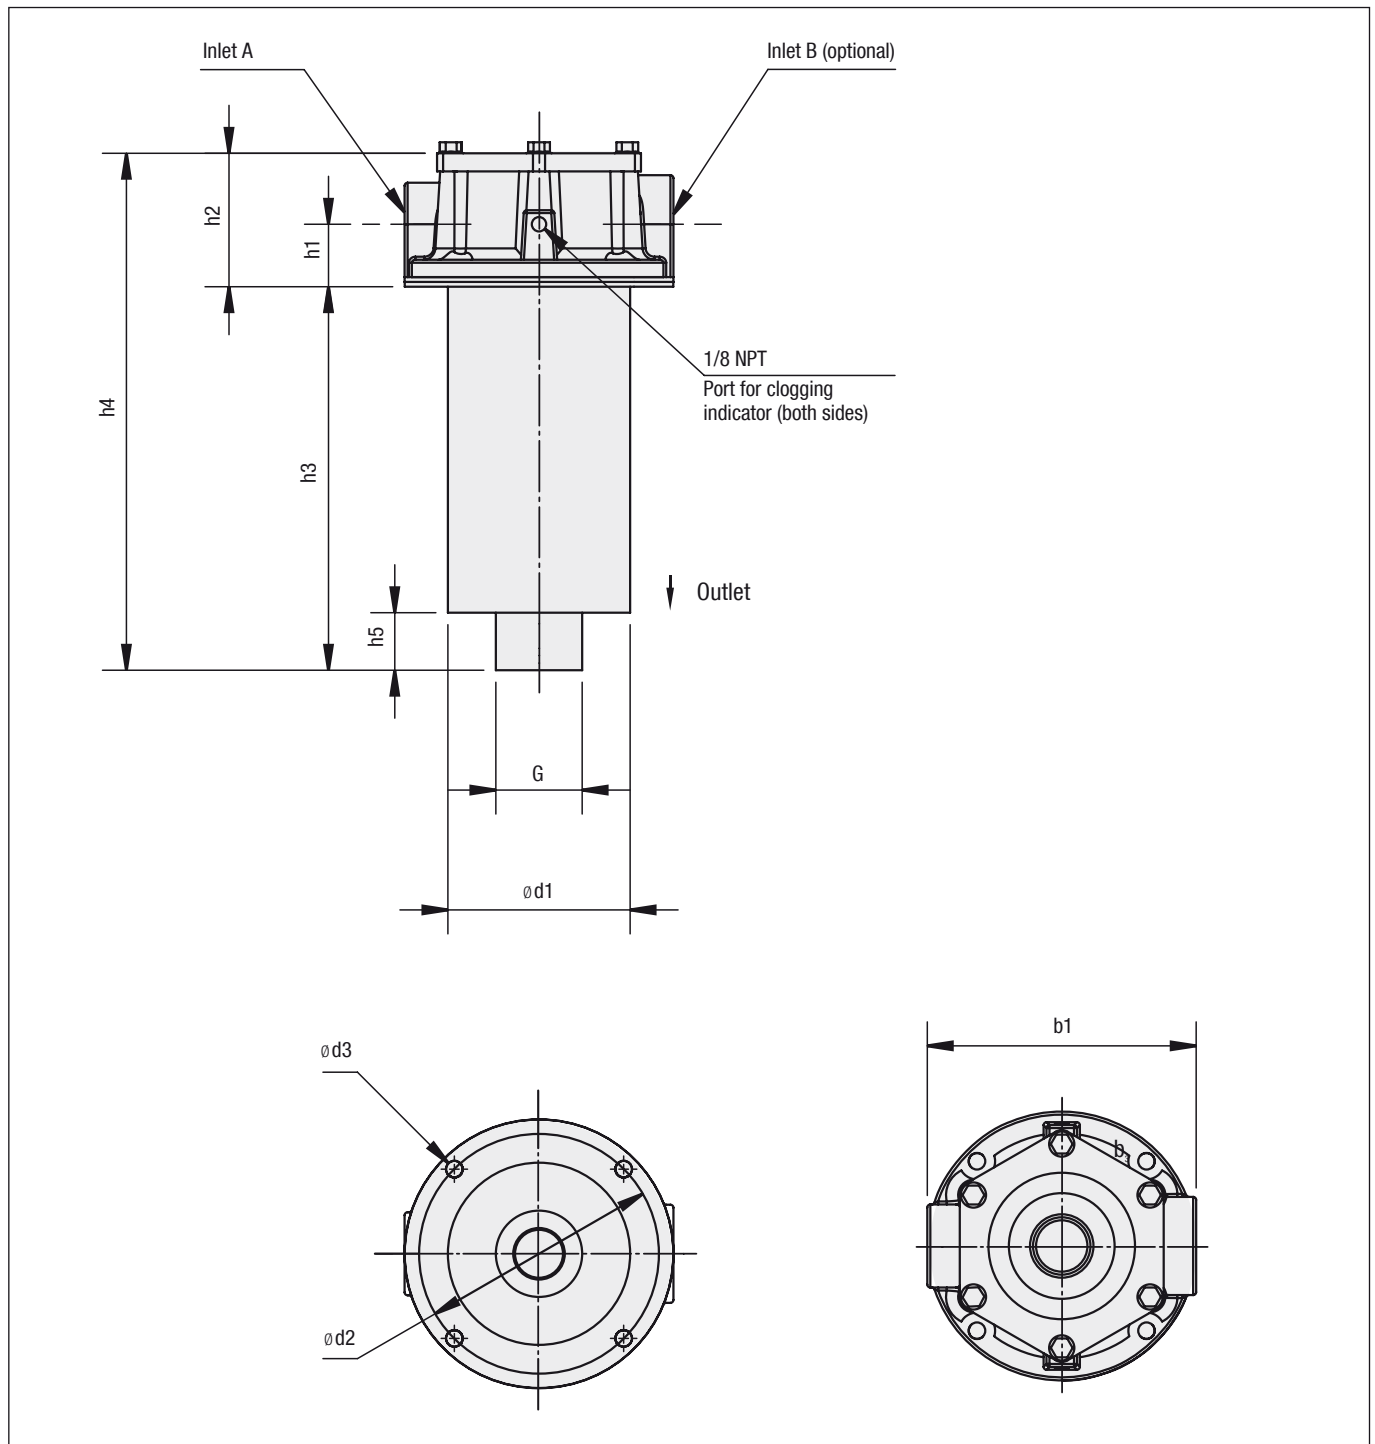

Return Line Filters ■ Type RTF Accessories

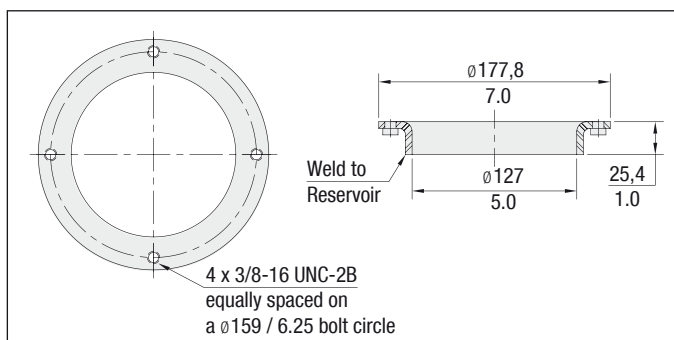

Dimensions in mm / in

RTF50 Series Weld Ring WR-40

The WR-40 weld ring is welded directly to the hydraulic reservoir, eliminating the need for drilling and tapping mounting holes in the reservoir.

Material: Carbon Steel

Return Line Filters ■ Type RTF50

Thread Connection Combinations	Filter Size RTF			
	5...S1		5...S2	
	Inlet A	Inlet B	Inlet A	Inlet B
NPT (N)	1-1/4	None	1-1/4	None
NPT (NM)	1-1/4	1-1/2	1-1/4	1-1/2
NPT (M)	None	1-1/2	None	1-1/2
Combination SAE & NPT (SM)	1-5/8-12	1-1/2	1-5/8-12	1-1/2
SAE (S)	1-5/8-12	None	1-5/8-12	None
SAE (T)	None	1-7/8-12	None	1-7/8-12
SAE (ST)	1-5/8-12	1-7/8-12	1-5/8-12	1-7/8-12
Combination NPT & SAE (NT)	1-1/4	1-7/8-12	1-1/4	1-7/8-12

Dimensions (mm/in)	Filter Size RTF	
	5...S1	5...S2
h1	49,3	42,3
	1.94	1.67
h2	95,5	88,5
	3.78	3.48
h3	241,3	485,9
	9.50	19.13
h4	336,8	574,9
	13.26	22.61
h5	29,5	38,1
	1.16	1.50
b1	177,8	177,8
	7.00	7.00
d1	124,8	126
	4.91	4.96
d2	158,7	158,7
	6.25	6.25
d3	11,2	11,2
	.44	.44
G	1-1/2 NPT	1-1/2 NPT

Return Line Filter Housings / Complete Filters ■ Type RTF50

RTF **58** **...** **...** **B** / **N** / **25** / **S2** / **V** / **X**

1 2 3 4 5 6 7 8 9 10

1 Type

Return Line Filter **RTF**

2 Group

Flow	Size
Group size 58	58
Group size 59	59

Note: Exact flow will depend on filter element selected.
Consult technical data on page C120.

3 Filter Material

Material	Max. Δp^* collapse	Micron ratings available	Code
Without filter element	-	-	...
Inorg. glass fibre	10 bar / 145 PSI	3, 5, 10, 25	G
Filter paper	5 bar / 72.5 PSI	3, 10, 20, 25	D

*Note: Collapse/burst resistance as per ISO 2941
Other materials on request

4 Micron Rating

3 μm	03
5 μm	05
10 μm	10
20 μm	20
25 μm	25

Note: Other micron ratings on request

5 Sealing Material

NBR (Buna®) **B**
Note: Other sealing materials on request

6 Connection Style

Connection Style	Group Port A	Port B	Code
NPT	1-1/4	None	N
NPT	1-1/4	1-1/2	NM
NPT	None	1-1/2	M
Combination SAE & NPT	1-5/8-12	1-1/2	SM
SAE	1-5/8-12	None	S
SAE	None	1-7/8-12	T
SAE	1-5/8-12	1-7/8-12	ST
Combination NPT & SAE	1-1/4	1-7/8-12	NT

7 Valve

No bypass	00
1 bar / 15 PSI	15
1,7 bar / 24.6 PSI	25

8 Length

Bowl Length 1 (1 element)	S1
Bowl Length 2 (2 elements)	S2

9 Clogging Indicator

No clogging indicator	N
Visual clogging indicator	V
Electrical clogging indicator	E

Note: See pages C112 and C121 for more details on
indicator ports and types.

10 Design Code

Only for information	X
----------------------	----------

Filter Elements ■ Type RTE

RTE - **58** **D** **10** **B** / **X**

1 2 3 4 5 6

1 Type

Filter Element Series **RTE**

2 Group

According to filter housing

3 Filter Material

Material	Max. Δp^* collapse	Micron ratings available	Code
Inorg. glass fibre	10 bar / 145 PSI	3, 5, 10, 25	G
Filter paper	5 bar / 72.5 PSI	3, 10, 20, 25	D

*Note: Collapse/burst resistance as per ISO 2941
Other materials on request

4 Micron Rating

3 μm	03
5 μm	05
10 μm	10
20 μm	20
25 μm	25

Note: Other micron ratings on request

5 Sealing Material

NBR (Buna®) **B**
Note: Other sealing materials on request

6 Design Code

Only for information	X
----------------------	----------

Return Line Filters ■ Type RTF-N



Product Description

STAUFF RTF-N Return Line Insert Filters allow for a choice of installation configurations which permits custom reservoir design with an in tank filtering system. The filters are installed semi-immersed or totally immersed into a reservoir. The filtration flow is from inside to the outside of the element which ensures that all the contaminant is collected inside the element itself avoiding contact with the reservoir fluid during element change. The combination of magnetic pre-filtration and high filtration efficiency results in a cost effective and versatile filtration system.

Technical Data

Construction

- Insert filter

Materials

- Flange plate: Aluminum
- Magnet rod: Steel
- Bypass: Steel
- Diffuser: Steel
- Sealings: NBR (Buna-N®)
FPM (Viton®)
Other sealing materials on request

Flow Rating

- Up to 500 l/min / 132 US GPM

Operating Pressure

- Max. 10 bar / 145 PSI

Temperature Range

- -29 °C ...+107 °C / -20 °F ... +225 °F

Filter Elements

- Specifications see page C118

Media Compatibility




- Mineral oils, other fluids on request

Options and Accessories


Valve

- Bypass valve: Opening pressure 1,5 bar / 22 PSI
(integrated in the filter element) Other settings available on request

Return Line Filters ■ Type RTF-N

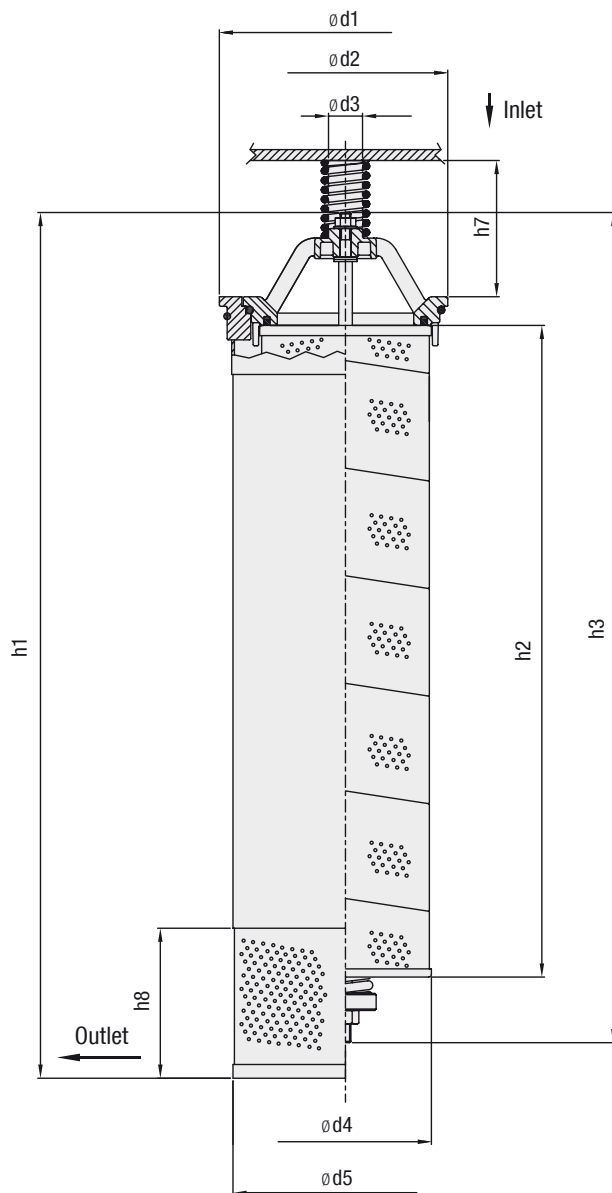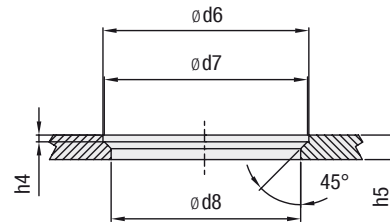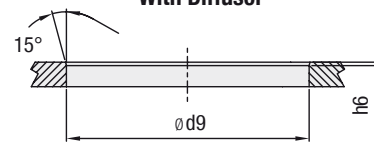Tank hole for mounting
Without DiffusorTank hole for mounting
With Diffusor

Mounting Options

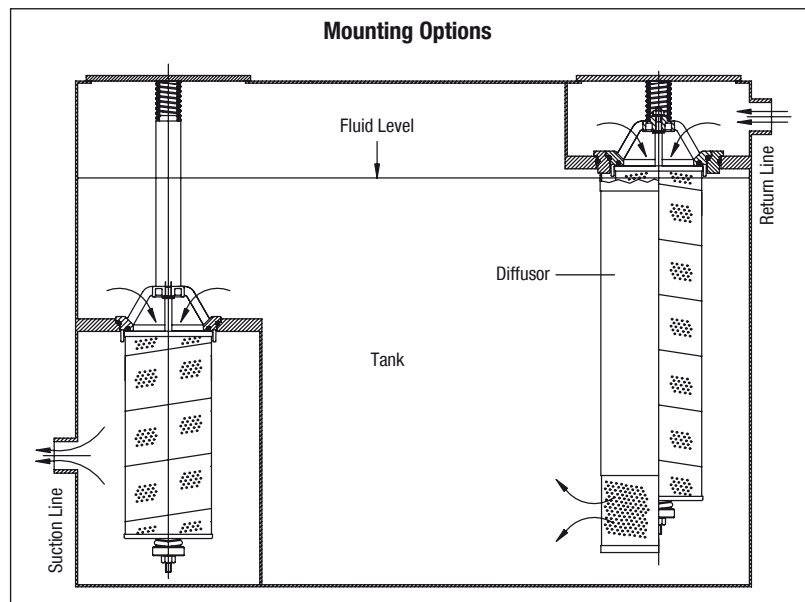

Return Line Filters ■ Type RTF-N

Dimensions (mm/in)	Filter Size RTF-N	
	390	500
h1	445	635
	17.52	25.00
h2	290	478
	11.42	18.82
h3	421	609
	16.57	23.98
h4	5	5
	.20	.20
h5	18	18
	.71	.71
h6	2,5	2,5
	.10	.10
h7	100	100
	3.94	3.94
h8	110	110
	4.33	4.33
d1	185	185
	7.28	7.28
d2	150	150
	5.91	5.91
d3	25	25
	.98	.98
d4	126	126
	4.95	4.95
d5	165	165
	6.50	6.50
d6	151	151
	5.94	5.94
d7	149	149
	5.87	5.87
d8	139	139
	5.47	5.47
d9	178	178
	7.01	7.01

Return Line Filter Housings / Complete Filters ■ Type RTF-N

RTF-N **500** **...** **...** / **B** / **22** / **D** / **X**

1 2 3 4 5 6 7 8

1 Type

Return Line Insert Filter **RTF-N**

2 Group

Flow	Size
390 l/min / 103 US GPM	390
500 l/min / 132 US GPM	500

Note: Exact flow will depend on filter element selected.
Consult technical data on page C120.

3 Filter Material

Material	Max. Δp^* collapse	Micron ratings available	Code
Without filter element	-	-	...
Inorg. glass fibre	10 bar / 145 PSI	3, 5, 10, 20	E
Filter paper	10 bar / 145 PSI	10	L

*Note: Collapse/burst resistance as per ISO 2941
Other materials on request

4 Micron Rating

3 μm	03
5 μm	05
10 μm	10
20 μm	20

Note: Other micron ratings on request

5 Sealing Material

NBR (Buna®)	B
FPM (Viton®)	V

Note: Other sealing materials on request

6 Bypass Setting

1,5 bar / 22 PSI	22
------------------	-----------

7 Options

Without diffusor	none
With diffusor	D

8 Design Code

Only for information	X
----------------------	----------

Filter Elements ■ Type RA

RA - **500** **E** **10** / **B** / **X**

1 2 3 4 5 6

1 Type

Element for Insert Filter **RA**

2 Group

According to filter housing

3 Filter Material

Material	Max. Δp^* collapse	Micron ratings available	Code
Inorg. glass fibre	10 bar / 145 PSI	3, 5, 10, 20	E
Filter paper	10 bar / 145 PSI	10	L

*Note: Collapse/burst resistance as per ISO 2941
Other materials on request

4 Micron Rating

3 μm	03
5 μm	05
10 μm	10
20 μm	20

Note: Other micron ratings on request

5 Sealing Material

NBR (Buna®)	B
FPM (Viton®)	V













Note: Other sealing materials on request

6 Design Code

Only for information	X
----------------------	----------








Return Line Filters ■ Type RTF Flow Characteristics

The following characteristics are valid for mineral oils with a density of 0,85 kg/dm³ and the kinematic viscosity of 30 mm²/s (30cSt). The characteristics have been determined in accordance to ISO 3968. Multipass filter ratings have been obtained in accordance to ISO 16889. The housing pressure drop is directly proportional to the oil density. Consult STAUFF for details.

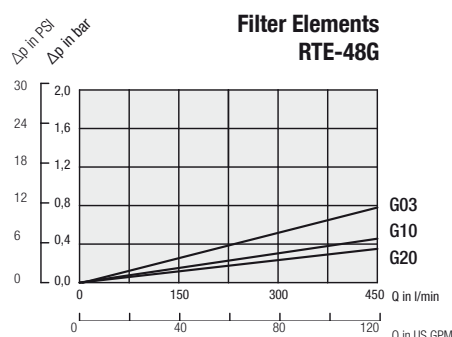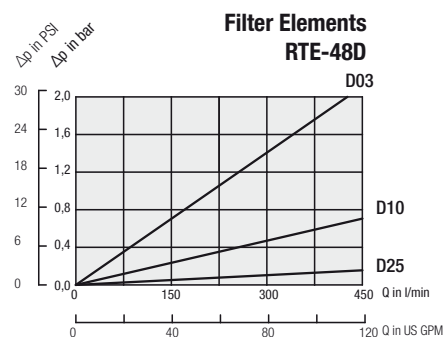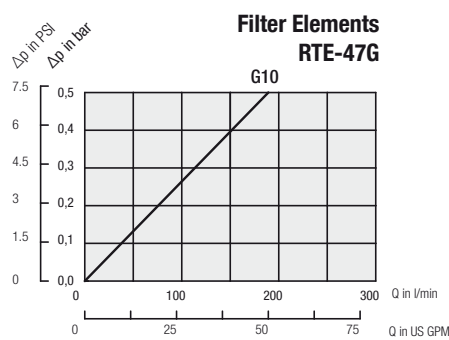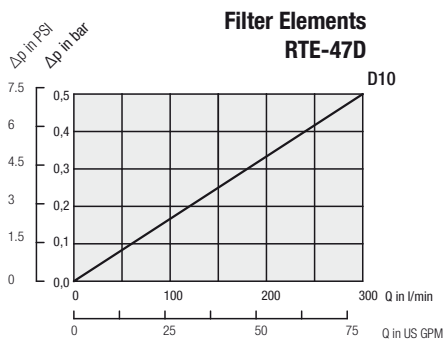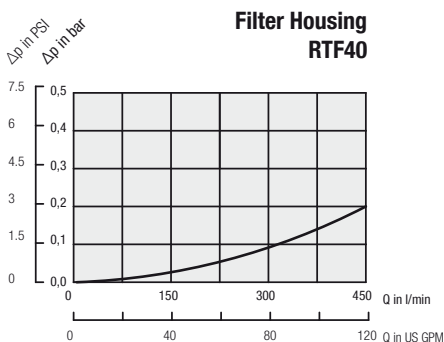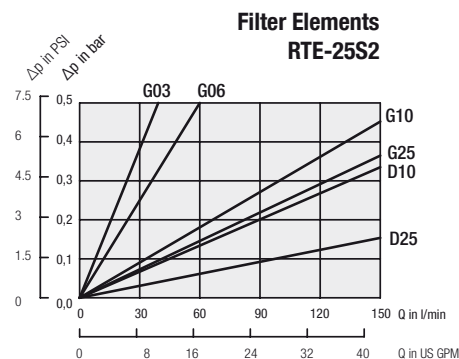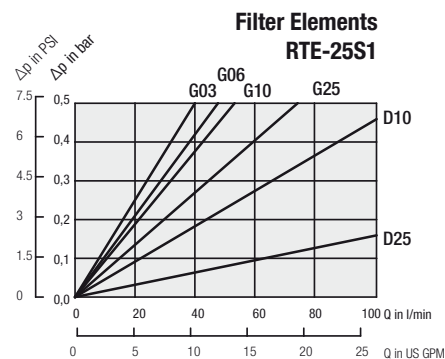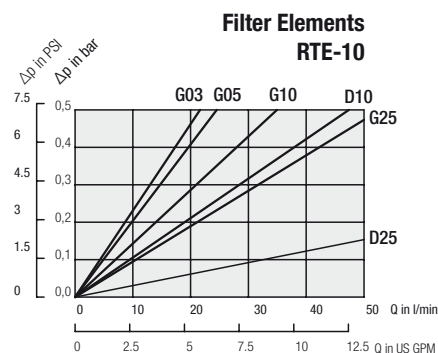
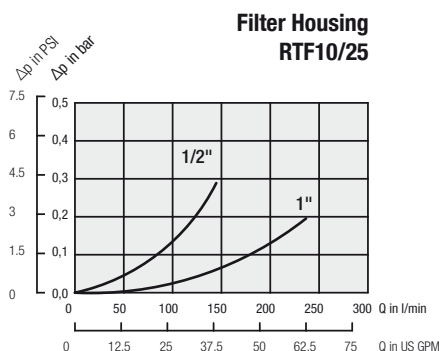
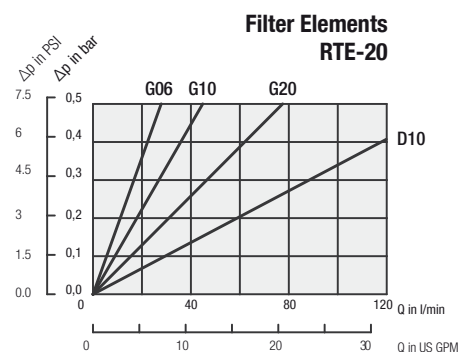
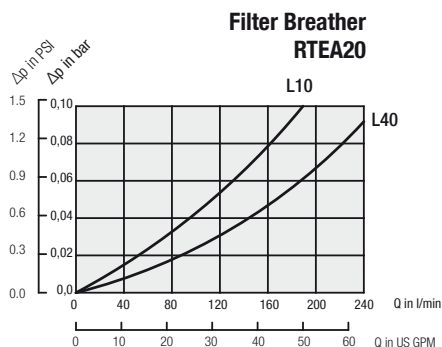
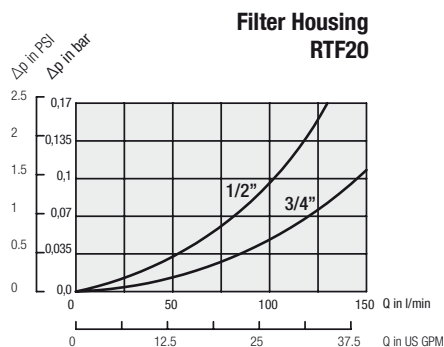


Return Line Filters ■ Type RTF Flow Characteristics

The following characteristics are valid for mineral oils with a density of $0,85 \text{ kg/dm}^3$ and the kinematic viscosity of $30 \text{ mm}^2/\text{s}$ (30cSt). The characteristics have been determined in accordance to ISO 3968. Multipass filter ratings have been obtained in accordance to ISO 16889. The housing pressure drop is directly proportional to the oil density. Consult STAUFF for details.

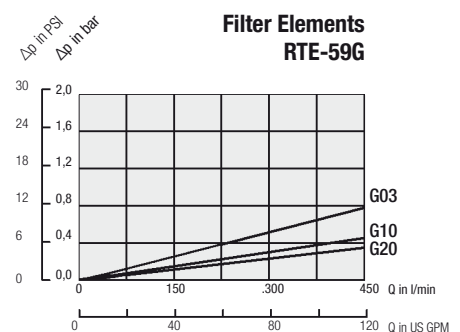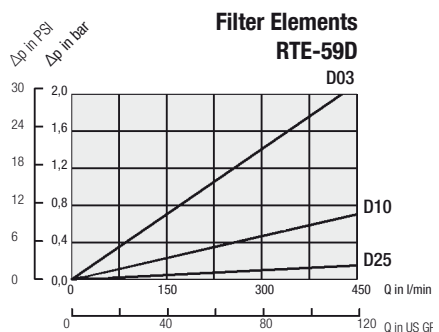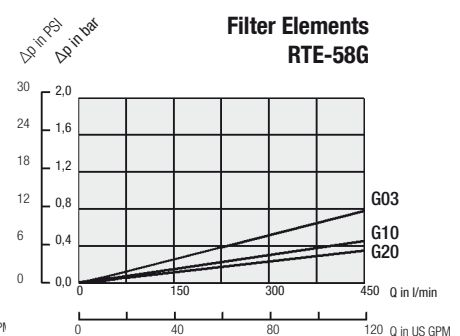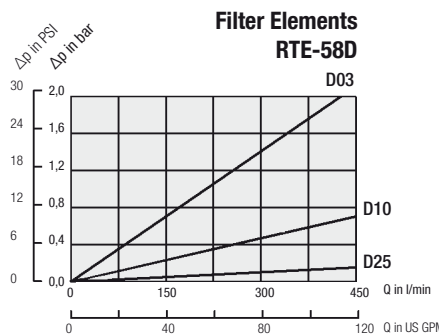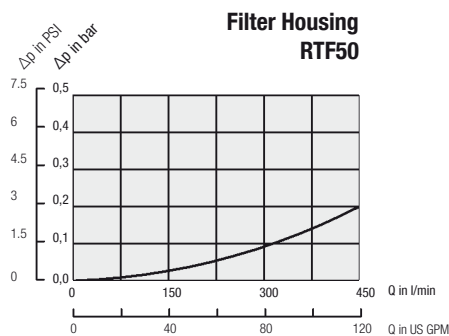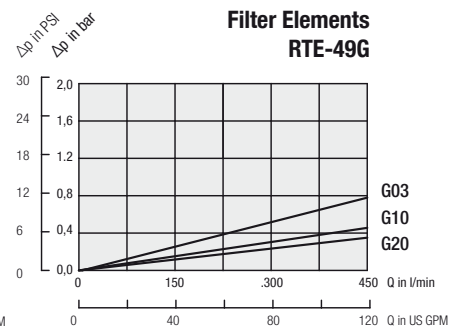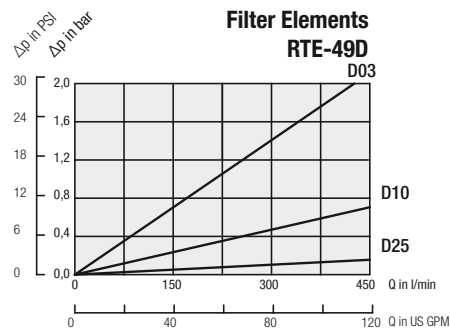

Note: Element pressure drop curves are for "S1" single elements. For "S2" double elements use 50% of the "S1" Value.

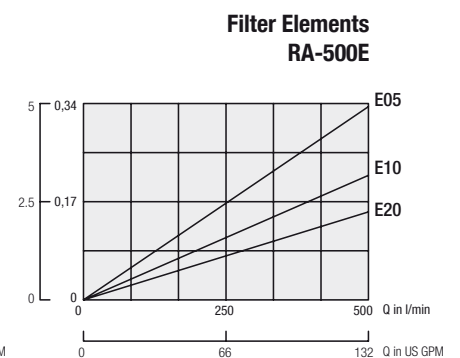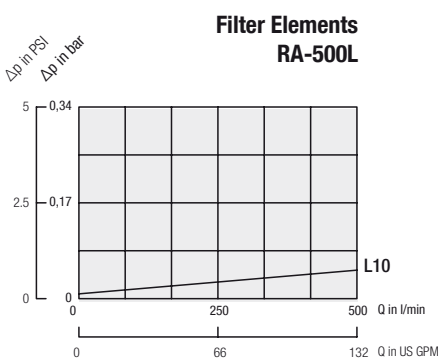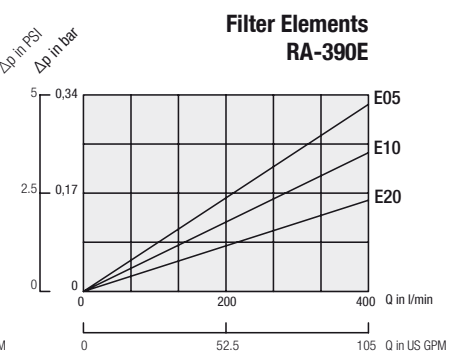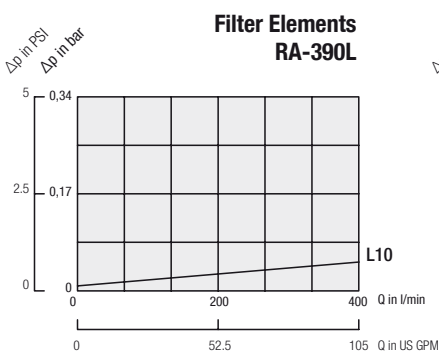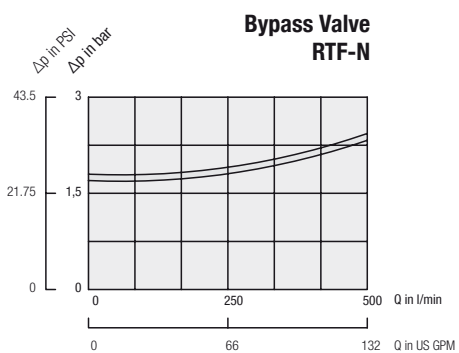

RTF Filter Indicators

Visual Indicators



SIM



CI

Visual Pressure Clogging Indicators

	Type	Thread Connection G	Unit of scale	Range of scale	Coloured Segments		
					Green	Yellow	Red
BSP	SIM-02	1/8	bar	0 ... 2,5	0 ... 1,2	1,2 ... 1,5	1,5 ... 2,5
	SIM-04	1/8	bar	0 ... 4	0 ... 2,5	2,5 ... 3	3 ... 4
	SIM-12	1/8	bar	0 ... 12	without coloured segments		
NPT	CI-12	1/8	PSI	0 ... 100	0 ... 13	13 ... 15	15 ... 100
	CI-20	1/8	PSI	0 ... 100	0 ... 21	21 ... 25	25 ... 100

Electrical Indicators



SIE-NO/NC



EPS

Electrical Clogging Indicators

	Type	Thread Connection G	Unit of scale	Adjustable range / Actuating pressure	Max. over pressure
BSP	SIE-NO	1/8	bar	1,3 (normally open)	80 bar / 1160 PSI
	SIE-NC	1/8	bar	1,3 (normally closed)	80 bar / 1160 PSI
	EPS-1B	1/8	bar	0,35 ... 2,5	25 bar / 362 PSI
NPT	EPS-1	1/8	PSI	5 ... 35	24 bar / 350 PSI


Technical Data SIE / EPS

	Type EPS-1 / 1B
Electrical data	6 Amp 125/250 V AC
Protection	DIN 43650 IP65
Temperature Range	-5 °C ... +90 °C / +23 °F ... +194 °F (ambient and media)
Diaphragm Material	NBR
Housing Material	Brass
Adjustable Range	0,35 bar ... 2,0 bar / 5 ... 30 PSI
Dead Band	20% F.S.
Weight	0,1 kg / .22 lbs
Repeatability	± 2 %
Hirschmann Connector With Strain Relief	


	Type SIE (electrical switch)
Electrical data	48V
Protection	DIN 43650 IP54
Temperature Range	-5 °C ... +60 °C / +23 °F ... +140 °F (ambient and media)
Diaphragm Material	NBR
Housing Material	Brass
Actuating Pressure	1,3 bar / 19 PSI
Max. current (res.)	0,5 A
Max. current (ind.)	0,2 A
Available as "normally open" (closes contact at actuating pressure) and as "normally closed" (opens contact at actuating pressure)	

Dimensions


Type SIM

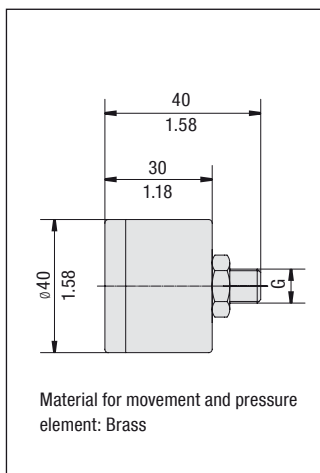


Type CI

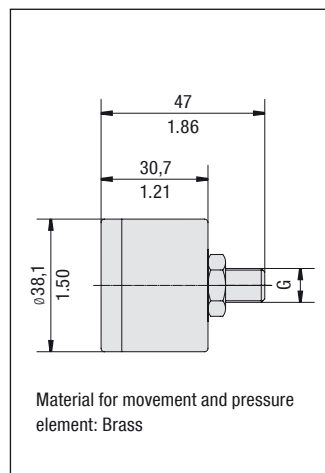

Type SIE

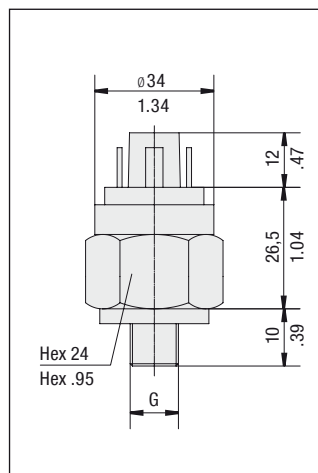

Type EPS

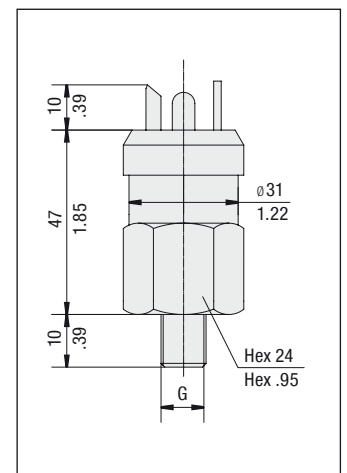

Note: The customer / user carries the responsibility for the electrical connection.

Spin-On Filters ■ Introduction



Product Description

STAUFF provides a complete range of Spin-On filters which can be used either as suction filters or as return line filters for low pressure applications. The various ranges meet international standards. The corresponding STAUFF Filter Elements are available from stock.

Technical Data

Material

- Filter head: Aluminium
- Sealings: NBR (Buna-N®)

Port Connection

- BSP
- NPT
- SAE Flange
- SAE O-ring thread
- Other port connections on request

Operating Pressure

- Up to 14 bar / 200 PSI

Nominal Flow Rate

- Up to 460 l/min / 120 US GPM

Options and Accessories


Clogging Indicators

- Visual clogging indicator with coloured segments
- Electrical clogging switch
- Other types available on request

Private Labelling

- On request, the filter elements can be printed with a private label


Private Labeling

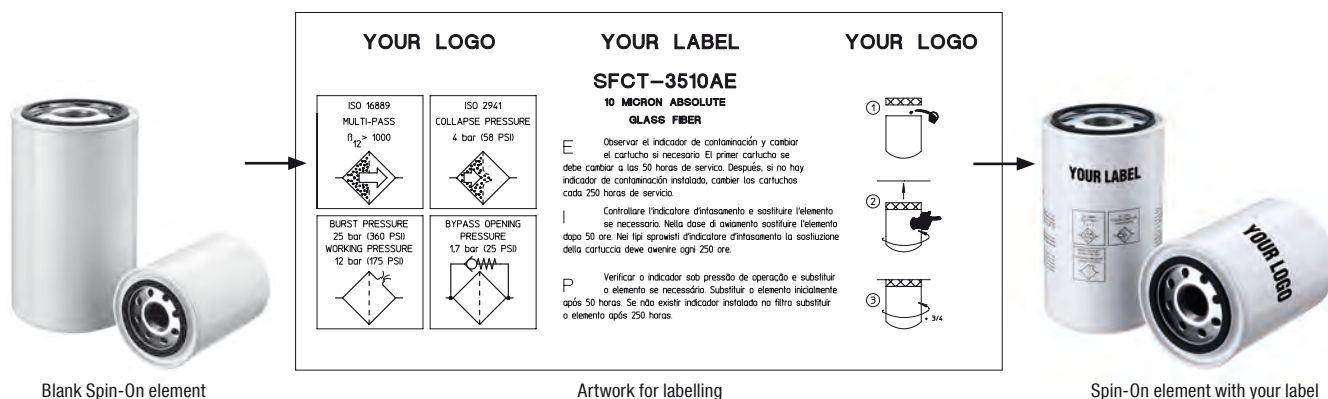

Spin-On Filters ■ Quick Reference Guide

Type A



Spin-On Filter with seal contour A
for filter elements with inner seal

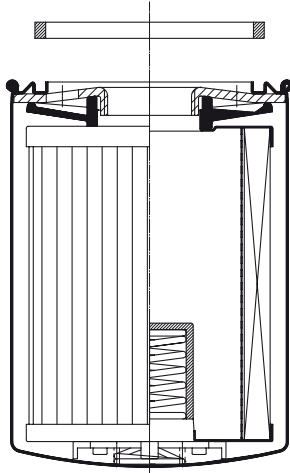

Type B

Spin-On Filter with seal contour B
for filter elements with outer seal

Allowed seal types for Spin-On elements

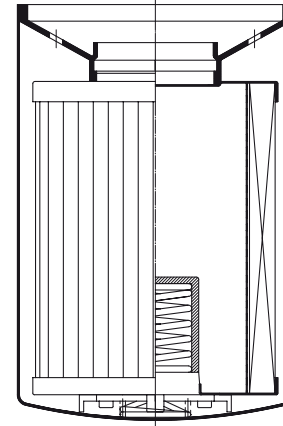

Spin on Filters Quick Reference Guide

Spin-On Filter Heads									Spin-On Filter Elements (see page ...)						
Series	Size	Port	Spigot	Max. Flow Rate*		Catalog Page	Seal Contour		SF63	SF65	SF67	SFC-35 SFC-36	SFC-57 SFC-58	SFCT-35 SFCT-36	SFCT-57 SFCT-58
				l/min	US GPM		Type A	Type B							
SLF	02	1/4 NPT	3/4–16 UNF	19	5	C124	x		C141						
SLF	03	3/8 NPT	3/4–16 UNF	19	5	C124	x		C141						
SLF	04	9/16–18 UN	3/4–16 UNF	26	7	C124	x		C141						
SAF	05	1/2 NPT	1–12 UNF	57	15	C125	x			C142					
SAF	06	3/4–16 UN	1–12 UNF	57	15	C125	x			C142					
SAF	07	3/4 NPT	1–12 UNF	90	25	C125	x			C142					
SAF	11	1-1/16–12 UN	1–12 UNF	90	25	C125	x			C142					
SAF	10	1 NPT	1–12 UNF	128	34	C126	x			C142					
SAF	13	1-5/16–12 UN	1–12 UNF	128	34	C126	x			C142					
SSF	12	G3/4	G3/4	90	25	C127	x					C139			
SSF	20L	G1-1/4	G1-1/4 + 1-1/2–16 UN	225	60	C128	x	x			C143		C140		
SSF	100	1 NPT	G1-1/4 + 1-1/2–16 UN	170	45	C129	x	x			C143		C140		
SSF	120L	1-1/4 NPT	G1-1/4 + 1-1/2–16 UN	225	60	C129	x	x			C143		C140		
SSF	120	1-1/4 NPT	G1-1/4 + 1-1/2–16 UN	225	60	C129	x	x			C143		C140		
SSF	130	1-5/16–12 UN	G1-1/4 + 1-1/2–16 UN	225	60	C129	x	x			C143		C140		
SSF	160	1-5/8–12 UN	G1-1/4 + 1-1/2–16 UN	225	60	C129	x	x			C143		C140		
SSF	150	1-1/2 NPT	1-1/2–16 UN	300	80	C130		x			C143				
SSF	180	1-7/8–12 UN	1-1/2–16 UN	300	80	C130		x			C143				
SSF	24B	G1-1/2	G1-1/4 + 1-1/2–16 UN	454	120	C131	x	x			C143		C140		
SSF	24N	1-1/2 NPT	G1-1/4 + 1-1/2–16 UN	454	120	C132	x	x			C143		C140		
SSF	24S	1-7/8–12 UN	G1-1/4 + 1-1/2–16 UN	454	120	C132	x	x			C143		C140		
SSF	25B	G1-1/2 and 1-1/2 SAE Flange	G1-1/4 + 1-1/2–16 UN	454	120	C133	x	x			C143		C140		
SSF	25	1-1/2 NPT and 2 SAE Flange	G1-1/4 + 1-1/2–16 UN	454	120	C134	x	x			C143		C140		
SSFT	12B	G3/4	G3/4	75	20	C135	x	x						C139	
SSFT	12	3/4 NPT	G3/4	75	20	C136	x	x						C139	
SSFT	20B	G1-1/2	G1-1/4 + 1-1/2–16 UN	200	53	C137	x								C140
SSFT	20	1-1/2 NPT	G1-1/4 + 1-1/2–16 UN	200	53	C138	x								C140

* Note: Reflects nominal flow rate for return line application. Actual flow rate will depend on selected element and the viscosity of the fluid.

Spin-On Filter Heads ■ SLF-02 / 03 / 04

Dimensions



Technical Data

Construction

- In-line Spin-On filter head

Material

- Aluminium

Port Connection

- NPT
- SAE O-ring thread

Flow Rate

- 26 l/min / 7 US GPM for return line application
- 7 l/min / 2 US GPM for suction line application

Operating Pressure

- Max. 14 bar / 200 PSI
- Max. 5,5 bar / 80 PSI differential pressure (for any applicaton with no bypass valve)

Temperature Range

- -32 °C ... +100 °C / -25 °F ... +212 °F

Media Compatibility

- Mineral oils, other fluids on request

Options and Accessories




Filter Elements

- For use with SF63 series elements
- For element types with seal contour type A
- For element types and flow characteristics see page C141
- The element is not part of the scope of delivery

Clogging Indicators

- Visual clogging indicator with coloured segments
 - Electrical clogging switch 0,35 ... 2,5 bar / 5 ... 35 PSI adjustable
- For clogging indicator types see page C147

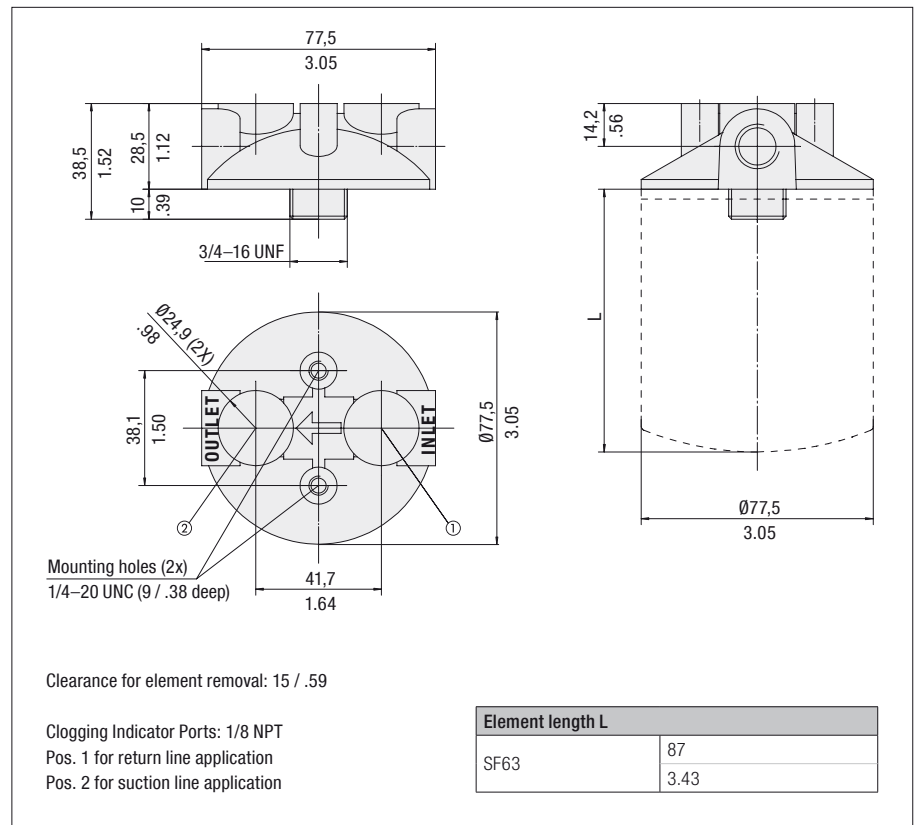

Dimensions in mm / in

Order Code

SLF - 02 - 0



1 Type

Spin-On Filter Head	SLF
---------------------	-----

2 Connection Style

Connection	Thread	Code
NPT	1/4	02
NPT	3/8	03
SAE	9/16–18	04


3 Clogging Indicator Port Options

No clogging indicator port	0
Clogging indicator port drilled for return line application	1
Clogging indicator port drilled for suction line application	2
All clogging indicator ports drilled	4
Special	9

Note: Standard clogging indicator port is 1/8 NPT.

Spin-On Filter Heads ■ SAF-05 / 06 / 07 / 11

Dimensions

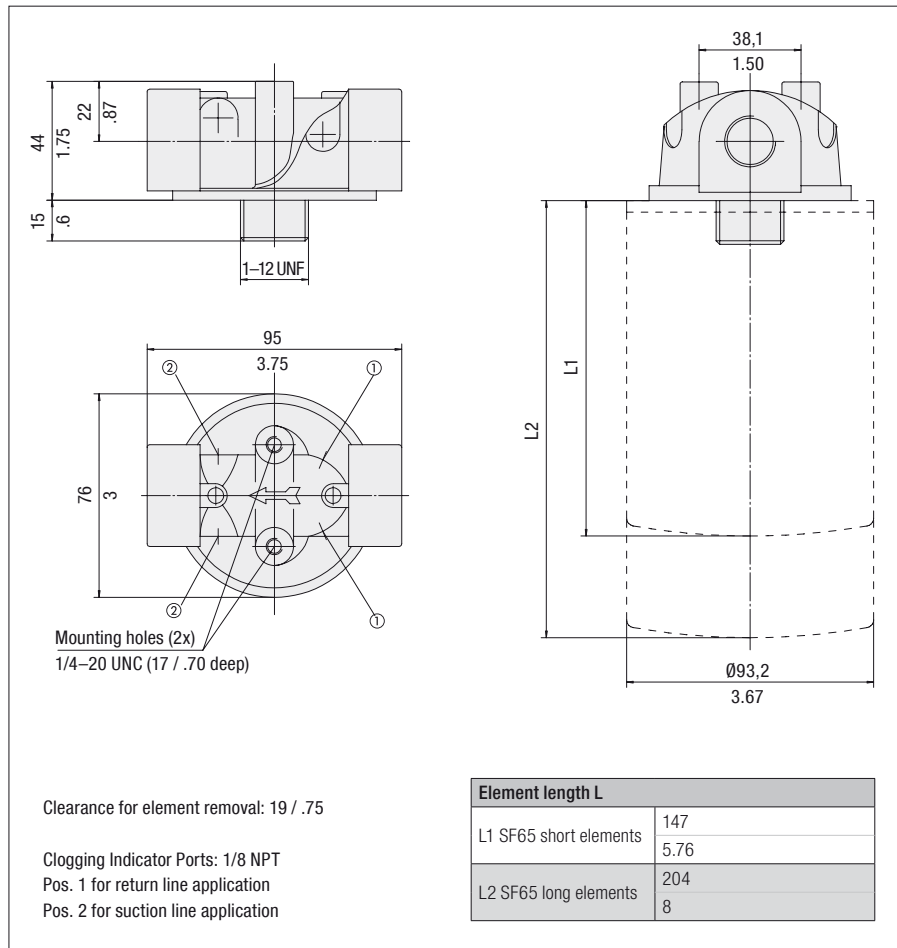

Dimensions in mm / in

Order Code

SAF-07-25-0

1 2 3 4

1 Type

Spin-On Filter Head **SAF**

2 Connection Style

Connection	Thread	Code
NPT	1/2	05
SAE	3/4-16	06
NPT	3/4	07
SAE	1-1/16-12	11


3 Bypass Options

No bypass	00
0,2 bar / 3 PSI	03
0,35 bar / 5 PSI	05
1 bar / 15 PSI	15
1,7 bar / 25 PSI	25

4 Clogging Indicator Port Options

No clogging indicator port	0
Clogging indicator port drilled for return line application	1
Clogging indicator port drilled for suction line application	2
All clogging indicator ports drilled	4
Special	9

Note: Standard clogging indicator port is 1/8 NPT.

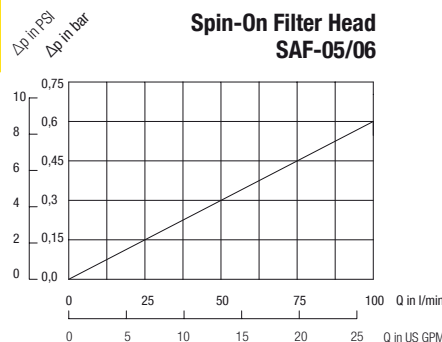

Spin-On Filter Head SAF-05/06



Filter Elements


- For use with SF65 series elements
- For element types with seal contour type A
- For element types and flow characteristics see page C142
- The element is not part of the scope of delivery

Valve

- Bypass valve (integrated in the head): Optional

Clogging Indicators

- Visual clogging indicator with coloured segments
- Electrical clogging switch 0,35 ... 2,5 bar / 5 ... 35 PSI adjustable
- For clogging indicator types see page C147

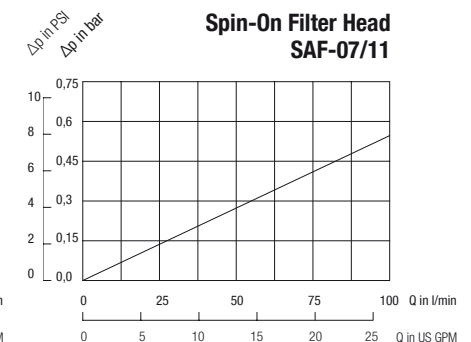

Spin-On Filter Head SAF-07/11

Spin-On Filter Heads ■ SAF-10 / 13



Technical Data

Construction

- In-line Spin-On filter head

Material

- Aluminium

Port Connection

- NPT
- SAE O-ring thread

Flow Rate

- 128 l/min / 34 US GPM for return line application
- 30 l/min / 8 US GPM for suction line application

Operating Pressure

- Max. 14 bar / 200 PSI
- Max. 5,5 bar / 80 PSI differential pressure (for any application with no bypass valve)

Temperature Range

- -32 °C ... +100 °C / -25 °F ... +212 °F

Media Compatibility

- Mineral oils, other fluids on request

Options and Accessories



Filter Elements


- For use with SF65 series elements
- For element types with seal contour type A
- For element types and flow characteristics see page C142
- The element is not part of the scope of delivery

Valve



- Bypass valve (integrated in the filter head): Optional

Clogging Indicators

- Visual clogging indicator with coloured segments
- Electrical clogging switch 0,35 ... 2,5 bar / 5 ... 35 PSI adjustable
- For clogging indicator types see page C147

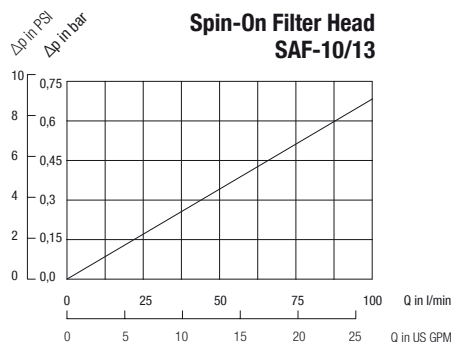

Dimensions

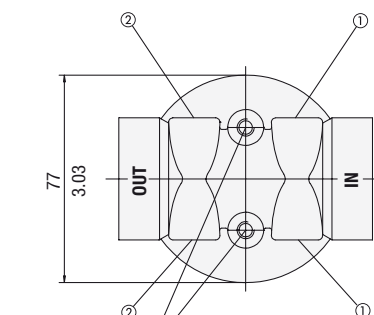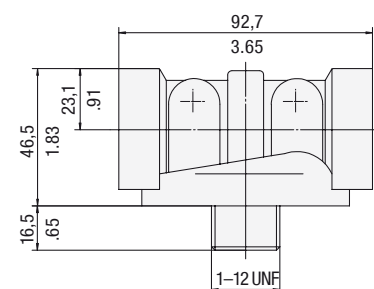


Mounting holes (2x)
1/4-20 UNC (23 / .94 deep)

Clearance for element removal: 19 / .75

Clogging Indicator Ports: 1/8 NPT

Pos. 1 for return line application

Pos. 2 for suction line application

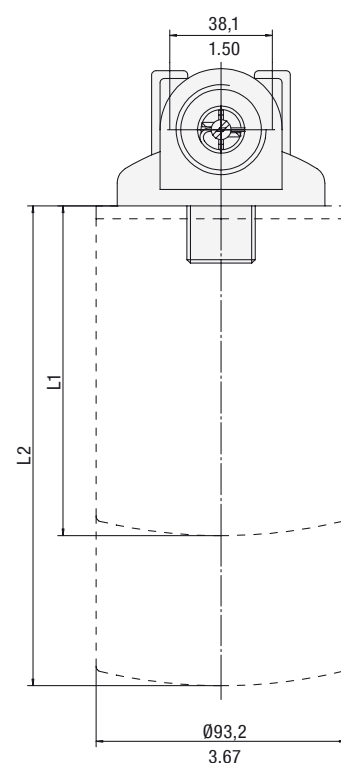

Element length L	
L1 SF65 short element	147
	5.76
L2 SF65 long element	204
	8

Dimensions in mm / in

Order Code

SAF - 10 - 25 - 0

1 2 3 4

1 Type

Spin-On Filter Head **SAF**

2 Connection Style

Connection	Thread	Code
NPT	1	10
SAE	1-5/16-12	13

3 Bypass Options

No bypass	00
0,2 bar / 3 PSI	03
0,35 bar / 5 PSI	05
1 bar / 15 PSI	15
1,7 bar / 25 PSI	25


4 Clogging Indicator Port Options

No clogging indicator port	0
Clogging indicator port drilled for return line application	1
Clogging indicator port drilled for suction line application	2
All clogging indicator ports drilled	4
Special	9

Note: Standard clogging indicator port is 1/8 NPT.

Spin-On Filter Heads ■ SSF-12

Dimensions

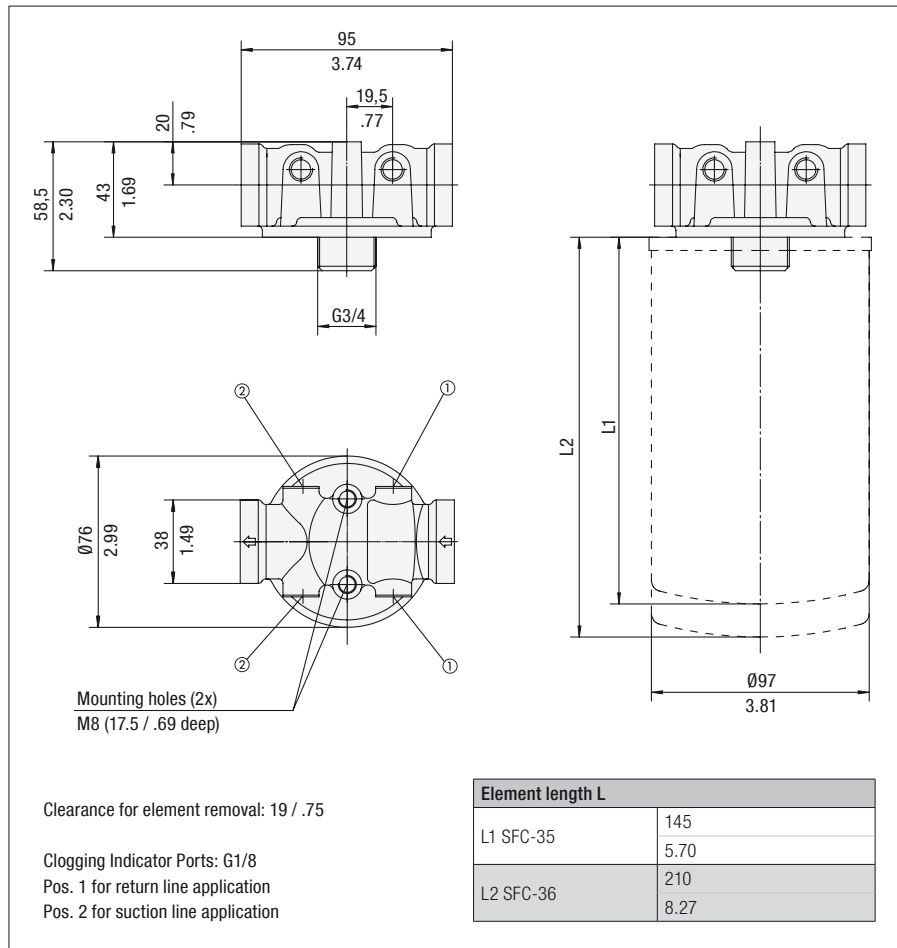

Technical Data

Construction

- In-line Spin-On filter head

Material

- Aluminium

Port Connection

- BSP

Flow Rate

- 90 l/min / 25 US GPM for return line application
- 23 l/min / 6 US GPM for suction line application

Operating Pressure

- Max. 12 bar / 174 PSI
- Max. 5 bar / 72.5 PSI differential pressure
(for any application with no bypass valve)

Temperature Range

- 32 °C ... +100 °C / -25 °F ... +212 °F

Media Compatibility

- Mineral oils, other fluids on request

Options and Accessories



Filter Elements

- For use with SFC-35/36 series elements
- For element types with seal contour type A
- For element types and flow characteristics see page C139
- The element is not part of the scope of delivery

Valve

- Bypass valve (integrated in the filter head): Optional

Clogging Indicators

- Visual clogging indicator with coloured segments
- Electrical clogging switch 1,3 bar / 19 PSI adjustable
- For clogging indicator types see page C147

Order Code

SSF-12-25-4

1 2 3 4

1 Type

Spin-On Filter Head **SSF**

2 Connection Style

Connection	Thread	Code
BSP	3/4	12

3 Bypass Options


No bypass	00
0,2 bar / 3 PSI	03
1,7 bar / 25 PSI	25

Note: Other settings available on request.

4 Clogging Indicator Port Options

All clogging indicator ports drilled	4
Special	9

Note: Standard clogging indicator port is G1/8.

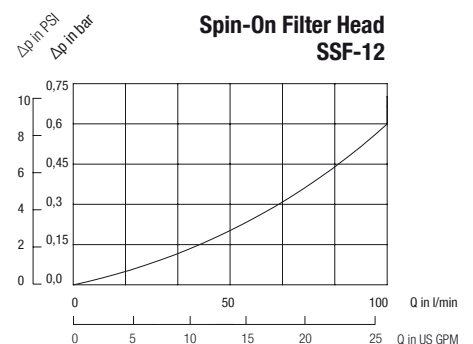

Spin-On Filter Heads ■ SSF-20L



Technical Data

Construction

- In-line Spin-On filter head

Material

- Aluminium

Port Connection

- BSP

Flow Rate

- 225 l/min / 60 US GPM for return line application
- 46 l/min / 12 US GPM for suction line application

Operating Pressure

- Max. 12 bar / 174 PSI
- Max. 5 bar / 72.5 PSI differential pressure (for any application with no bypass valve)

Temperature Range

- -32 °C ... +100 °C / -25 °F ... +212 °F

Media Compatibility

- Mineral oils, other fluids on request

Options and Accessories



Filter Elements


- For use with SF67 and SFC-57/58 series elements
- For element types with seal contour type A and B
- For element types and flow characteristics see page C143 for SF67 and page C140 for SFC-57/58.
- The element is not part of the scope of delivery

Valve




- Bypass valve (integrated in the filter head): Optional

Clogging Indicators

- Visual clogging indicator with coloured segments
 - Electrical clogging switch 0,35 ... 2,5 bar / 5 ... 35 PSI adjustable
- For clogging indicator types see page C147

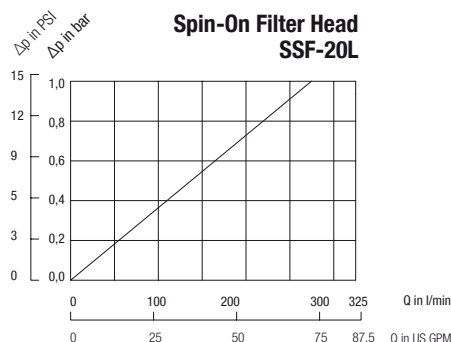

Dimensions

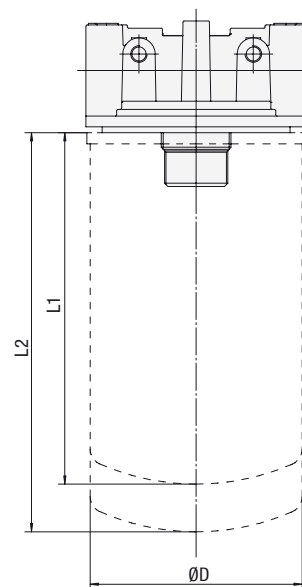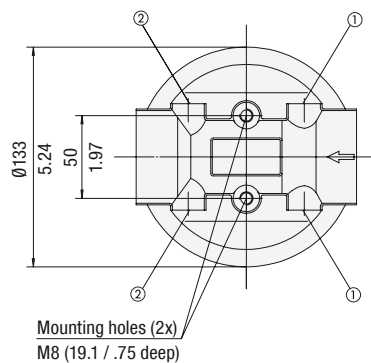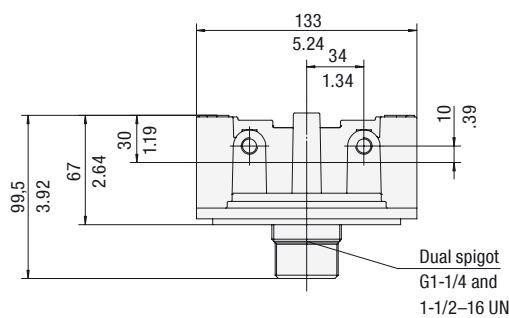

Clearance for element removal: 40 / 1.58

Clogging Indicator Ports: G1/8
Pos. 1 for return line application
Pos. 2 for suction line application

Element length L	L	ØD
L1 SFC-57	177	127
L2 SFC-58	226	127
L1 SF67 short element	168	128
L2 SF67 long element	270	128

Dimensions in mm / in

Order Code

SSF - 20L - 25 - 4

1 2 3 4

1 Type

Spin-On Filter Head **SSF**

2 Connection Style

Connection	Thread	Code
BSP	1-1/4	20L

3 Bypass Options

No bypass	00
0,2 bar / 3 PSI	03
1,7 bar / 25 PSI	25

Note: Other settings available on request.


4 Clogging Indicator Port Options

All clogging indicator ports drilled	4
Special	9

Note: Standard clogging indicator port for is G1/8.

Spin-On Filter Heads ■ SSF-100 / 120 / 120L / 130 / 160

Dimensions

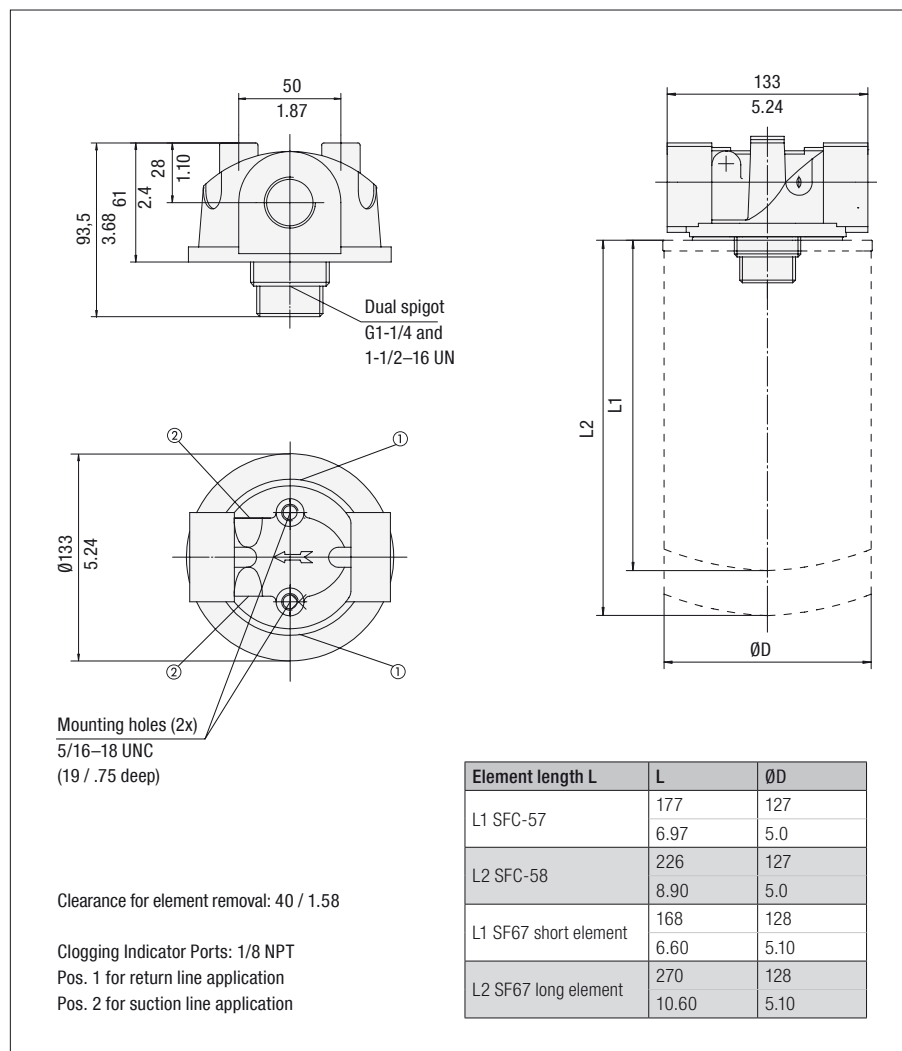

Dimensions in mm / in

Order Code

SSF - 120 - 25 - 0

1 2 3 4

1 Type

Spin-On Filter Head **SSF**

2 Connection Style

Connection	Thread	Code
NPT	1	100
NPT	1-1/4	120L
NPT	1-1/2	120
SAE	1-5/16-12	130
SAE	1-5/8-12	160

3 Bypass Options

No bypass	00
0,2 bar / 3 PSI	03
0,35 bar / 5 PSI	05
1 bar / 15 PSI	15
1,7 bar / 25 PSI	25

4 Clogging Indicator Port Options

No clogging indicator port	0
Clogging indicator port drilled for return line application	1
Clogging indicator port drilled for suction line application	2
All clogging indicator ports drilled	4
Special	9

Note: Standard clogging indicator port is 1/8 NPT.

Technical Data

Construction

- In-line Spin-On filter head

Material

- Aluminium

Port Connection

- NPT
- SAE O-ring thread

Flow Rate

- 225 l/min / 60 US GPM for return line application
- 46 l/min / 12 US GPM for suction line application

Operating Pressure

- Max. 12 bar / 174 PSI
- Max. 5 bar / 72.5 PSI differential pressure (for any application with no bypass valve)

Temperature Range

- 32 °C ... +100 °C / -25 °F ... +212 °F

Media Compatibility

- Mineral oils, other fluids on request

Options and Accessories



Filter Elements


- For use with SF67 and SFC-57/58 series elements
- For element types with seal contour type A and B
- For element types and flow characteristics see page C143 for SF67 and page C140 for SFC-57/58.
- The element is not part of the scope of delivery

Valve

- Bypass valve (integrated in the filter head): Optional

Clogging Indicators

- Visual clogging indicator with coloured segments
- Electrical clogging switch 0,35 ... 2,5 bar / 5 ... 35 PSI adjustable
- For clogging indicator types see page C147

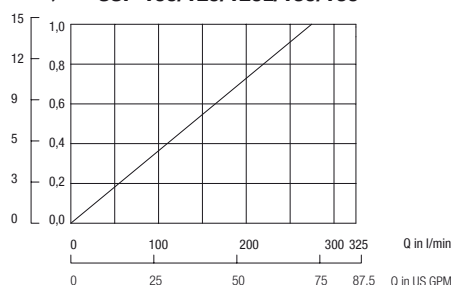Spin-On Filter Head
SSF-100/120/120L/130/160


Spin-On Filter Heads ■ SSF-150 / 180

Dimensions



Technical Data

Construction

- In-line Spin-On filter head

Material

- Aluminium

Port Connection

- NPT
- SAE O-ring thread

Flow Rate

- 300 l/min / 80 US GPM for return line application
- 113 l/min / 30 US GPM for suction line application

Operating Pressure

- Max. 14 bar / 200 PSI
- Max. 5,5 bar / 80 PSI differential pressure (for any application with no bypass valve)

Temperature Range

- -32 °C ... +100 °C / -25 °F ... +212 °F

Media Compatibility

- Mineral oils, other fluids on request

Options and Accessories



Filter Elements




- For use with SF67 series elements
- For element types with seal contour type B
- For element types and flow characteristics see page C143
- The element is not part of the scope of delivery

Valve

- Bypass valve (integrated in the filter head): Optional

Clogging Indicators


- Visual clogging indicator with coloured segments
- Electrical clogging indicator switch 0,35 ... 2,5 bar / 5 ... 35 PSI adjustable
- For clogging indicator types see page C147

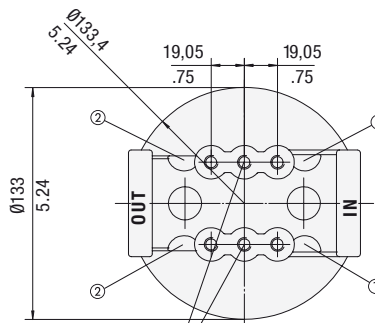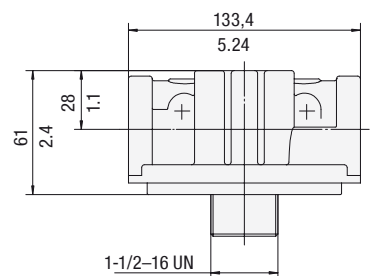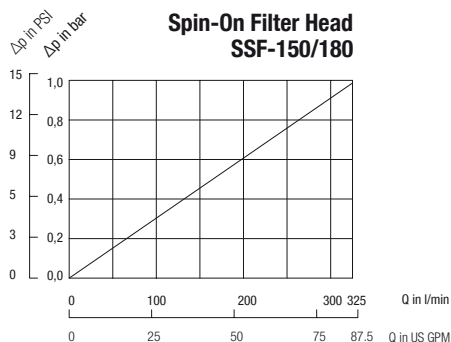

Mounting holes (6x)
5/16-18 UNC
(22 / .88 deep)

Clearance for element removal: 30 / 1.18

Clogging Indicator Ports: 1/8 NPT
Pos. 1 for return line application
Pos. 2 for suction line application

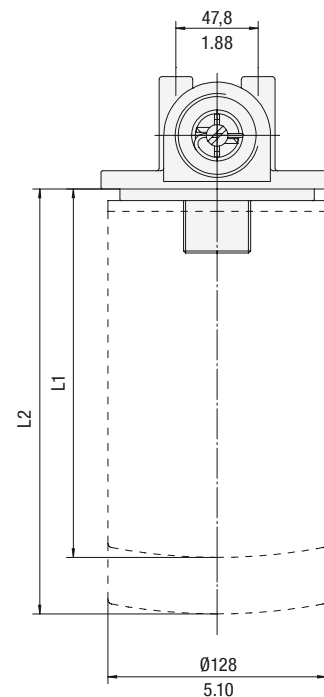

Element length L	
L1 SF67 short element	168
L2 SF67 long element	270
	10.60

Dimensions in mm / in

Order Code

SSF - 150 - 25 - 0

1 2 3 4

1 Type

Spin-On Filter Head **SSF**

2 Connection Style

Connection	Thread	Code
NPT	1-1/2	150
SAE	1-7/8-12	180

3 Bypass Options


No bypass	00
0,2 bar / 3 PSI	03
0,35 bar / 5 PSI	05
1 bar / 15 PSI	15
1,7 bar / 25 PSI	25

4 Clogging Indicator Port Options

No clogging indicator port	0
Clogging indicator port drilled for return line application	1
Clogging indicator port drilled for suction line application	2
All clogging indicator ports drilled	4
Special	9

Note: Standard clogging indicator port is 1/8 NPT.

Dimensions

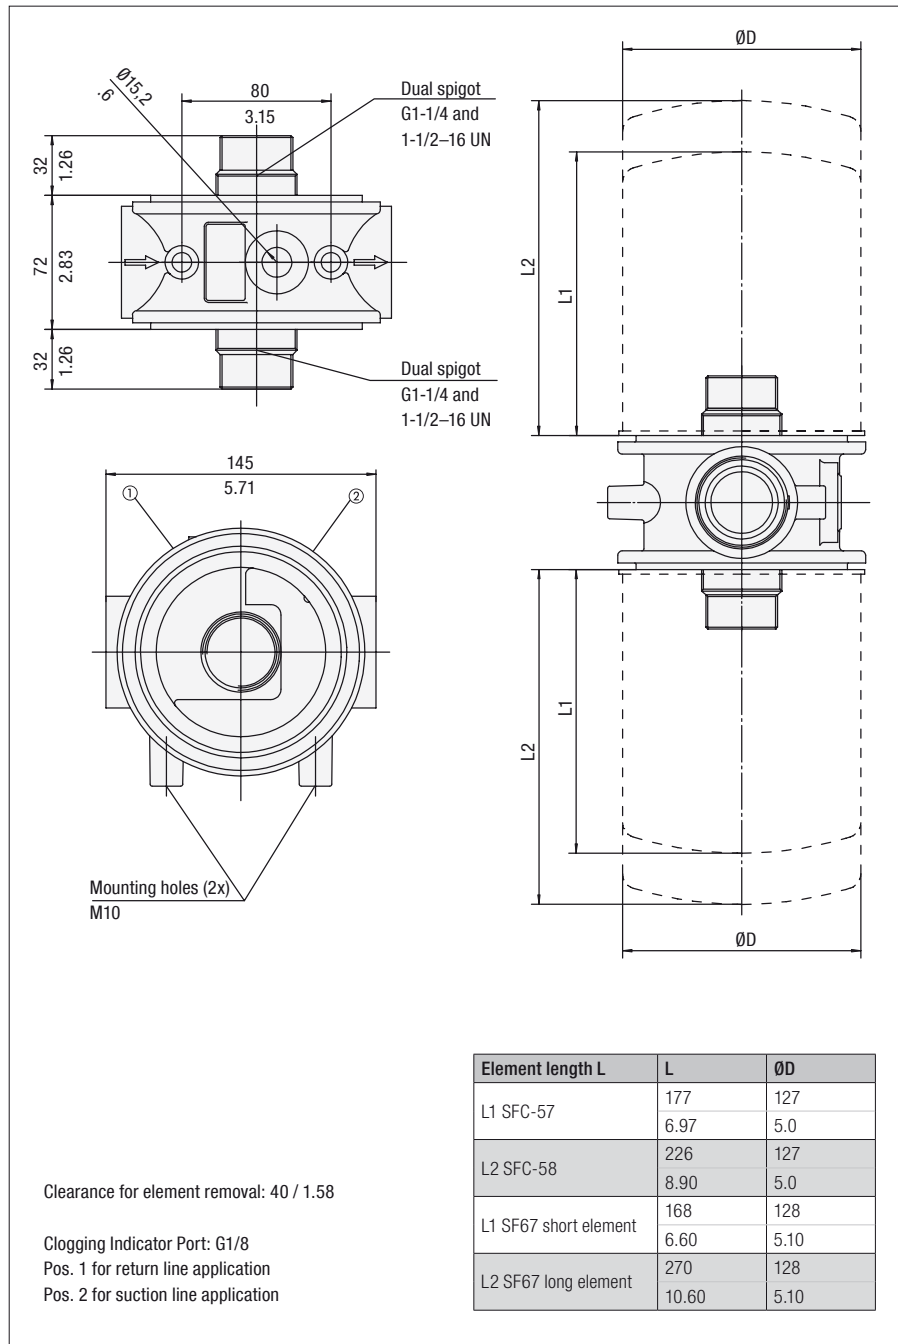

Dimensions in mm / in

Order Code

SSF - 24B - 25 - 4
1 2 3 4

1 Type

Double Spin-On Filter Head **SSF**

2 Connection Style

Connection	Thread	Code
BSP	1-1/2	24B

3 Bypass Options

No bypass	00
0,2 bar / 3 PSI	03
1,7 bar / 25 PSI	25

Note: Other settings available on request.

4 Clogging Indicator Port Options

All clogging indicator ports drilled	4
Special	9

Note: Standard clogging indicator port is G1/8.

Double Spin-On Filter Heads ■ SSF-24B



Technical Data

Construction

- In-line Double Spin-On filter head

Material

- Aluminium

Port Connection

- BSP

Flow Rate

- 454 l/min / 120 US GPM for return line application
- 132 l/min / 35 US GPM for suction line application

Operating Pressure

- Max. 12 bar / 174 PSI
- Max. 5 bar / 72.5 PSI differential pressure (for any application with no bypass valve)

Temperature Range

- 30 °C ... +100 °C / -22 °F ... +212 °F

Media Compatibility

- Mineral oils, other fluids on request

Options and Accessories



Filter Elements


- For use with SF67 and SFC-57/58 series elements
- For element types with seal contour type A and B
- For element types and flow characteristics see page C143 for SF67 and page C140 for SFC-57/58
- The element is not part of the scope of delivery

Valve

- Bypass valve (integrated in the head): Optional

Clogging Indicators

- Visual clogging indicator with coloured segments
- Electrical clogging switch 0,35 ... 2,5 bar / 5 ... 35 PSI adjustable
- For clogging indicator types see page C147

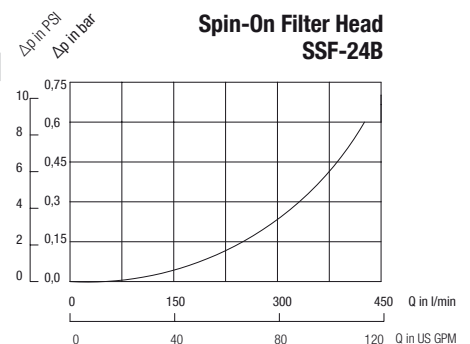

Double Spin-On Filter Heads ■ SSF-24N / 24S

Dimensions



Technical Data

Construction

- In-line Double Spin-On filter head

Material

- Aluminium

Port Connection

- NPT
- SAE flange
- SAE O-ring thread

Flow Rate

- 454 l/min / 120 US GPM for return line application
- 132 l/min / 35 US GPM for suction line application

Operating Pressure

- Max. 12 bar / 174 PSI
- Max. 5 bar / 72.5 PSI differential pressure (for any application with no bypass valve)

Temperature Range

- -30 °C ... +100 °C / -22 °F ... +212 °F

Media Compatibility

- Mineral oils, other fluids on request

Options and Accessories



Filter Elements



- For use with SF67 and SFC-57/58 series elements
- For element types with seal contour type A and B
- For element types and flow characteristics see page C143 for SF67 and page C140 for SFC-57/58
- The element is not part of the scope of delivery

Valve

- Bypass valve (integrated in the head): Optional

Clogging Indicators

- Visual clogging indicator with coloured segments
- Electrical clogging switch 0,35 ... 2,5 bar / 5 ... 35 PSI adjustable
- For clogging indicator types see page C147

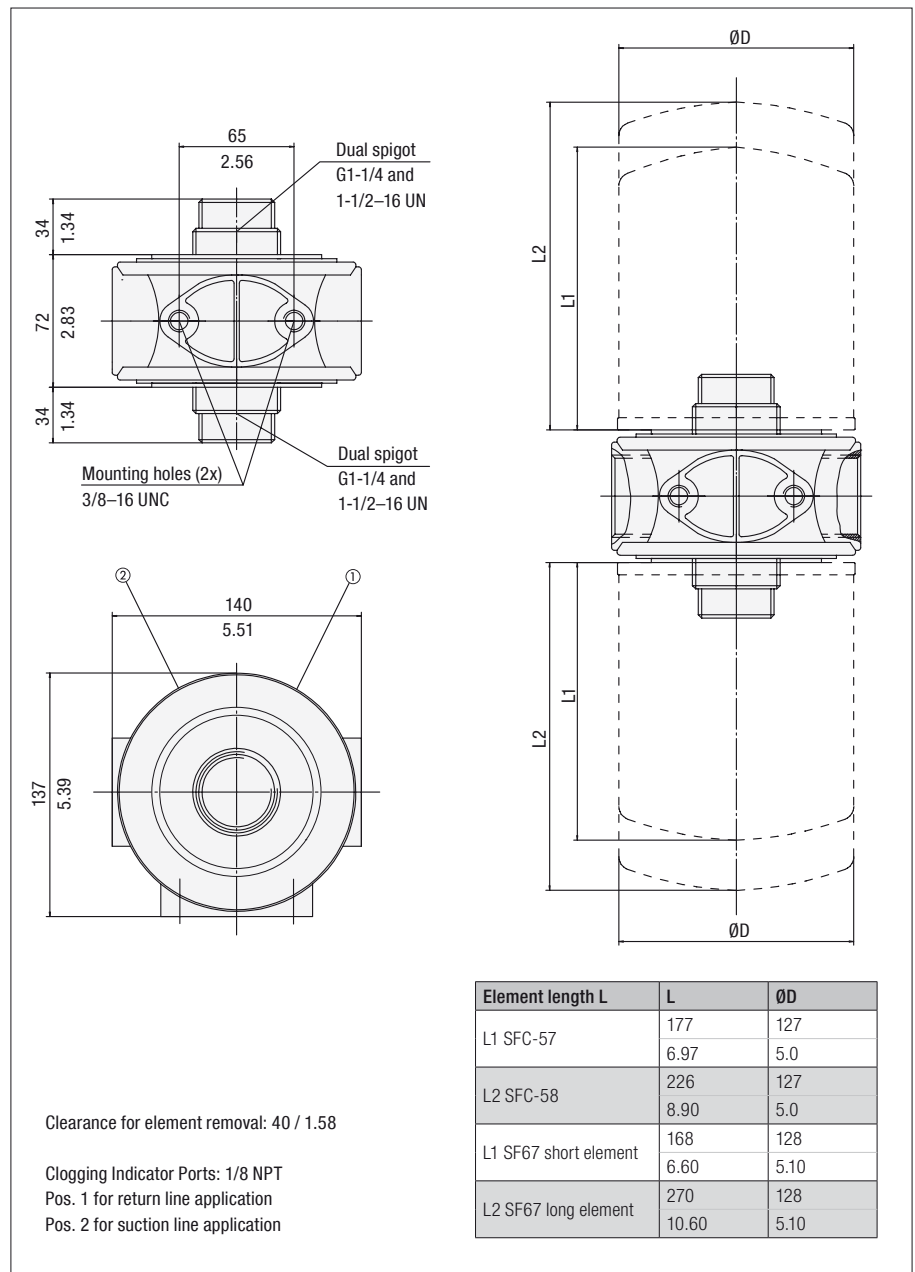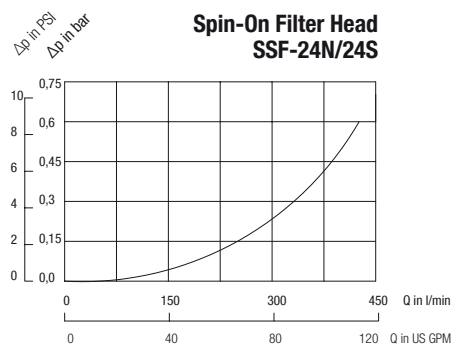

Dimensions in mm / in

Order Code

SSF - 24N - 25 - 0

1 2 3 4

1 Type

Double Spin-On Filter Head **SSF**

2 Connection Style

Connection	Thread	Code
NPT	1-1/2	24N
SAE	1-7/8-12	24S

3 Bypass Options


No bypass	00
0,2 bar / 3 PSI	03
0,35 bar / 5 PSI	05
1 bar / 15 PSI	15
1,7 bar / 25 PSI	25

4 Clogging Indicator Port Options

No clogging indicator port	0
Clogging indicator port drilled for return line application	1
Clogging indicator port drilled for suction line application	2
All clogging indicator ports drilled	4
Special	9

Note: Standard clogging indicator port is 1/8 NPT.

Dimensions

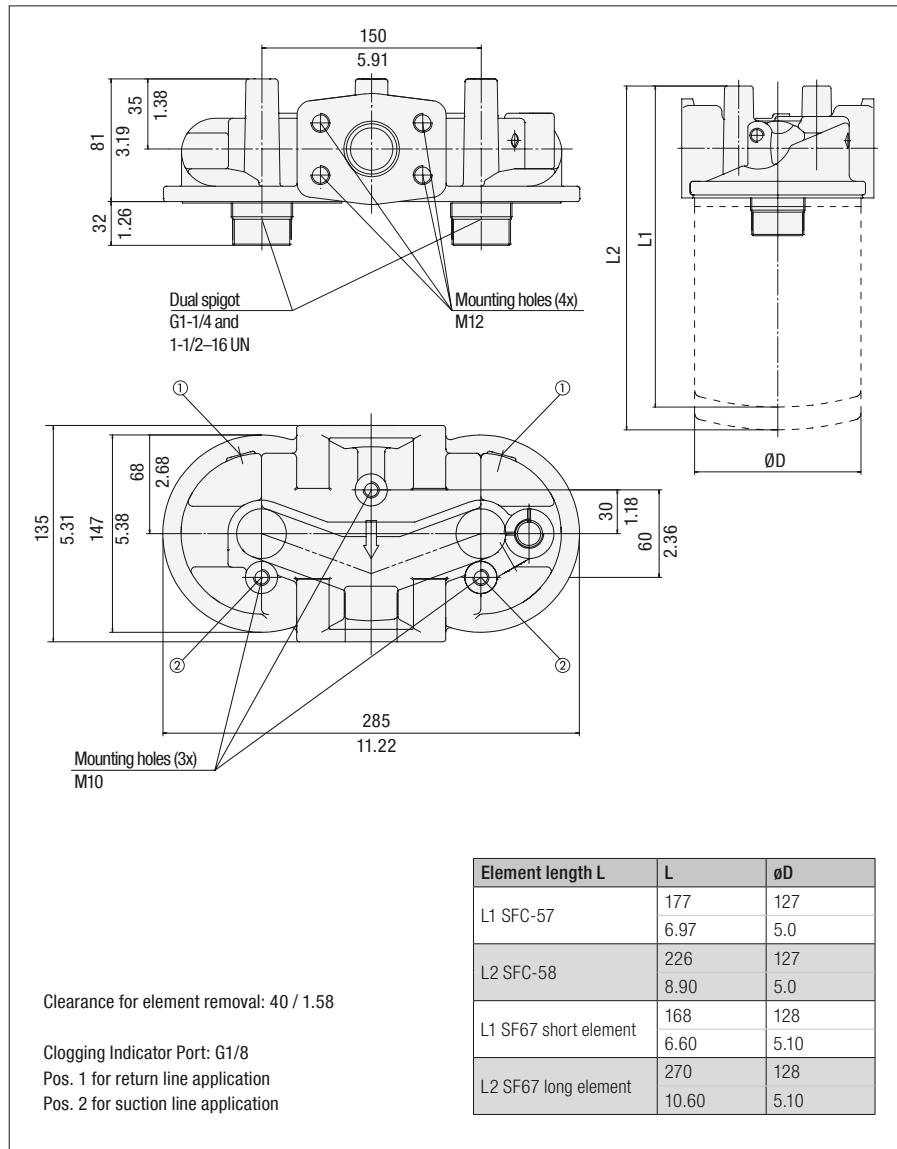

Dimensions in mm / in

Order Code

SSF - 25B - 25 - 4

1 Type

Double Spin-On Filter Head **SSF**

2 Connection Style

Connection	Thread	Code
BSP and SAE Flange	1-1/2 and 1-1/2 SAE Code 61 Flange	25B

3 Bypass Options

No bypass	00
0,2 bar / 3 PSI	03
1,7 bar / 25 PSI	25

Note: Other settings available on request.

4 Clogging Indicator Port Options

All clogging indicator ports drilled	4
Special	9

Note: Standard clogging indicator port is G1/8.

Double Spin-On Filter Heads ■ SSF-25B



Technical Data

Construction

- In-line Double Spin-On filter head

Material

- Aluminium

Port Connection

- BSP
- SAE flange

Flow Rate

- 454 l/min / 120 US GPM for return line application
- 132 l/min / 35 US GPM for suction line application

Operating Pressure

- Max. 12 bar / 174 PSI
- Max. 5 bar / 72.5 PSI differential pressure (for any application with no bypass valve)

Temperature Range

- -30 °C ... +100 °C / -22 °F ... +212 °F

Media Compatibility

- Mineral oils, other fluids on request

Options and Accessories



Filter Elements


- For use with SF67 and SFC-57/58 series elements
- For element types with seal contour type A and B
- For element types and flow characteristics see page C143 for SF67 and page C140 for SFC-57/58
- The element is not part of the scope of delivery

Valve

- Bypass valve (integrated in the head): Optional

Clogging Indicators

- Visual clogging indicator with coloured segments
 - Electrical clogging switch 0,35 ... 2,5 bar / 5 ... 35 PSI adjustable
- For clogging indicator types see page C147

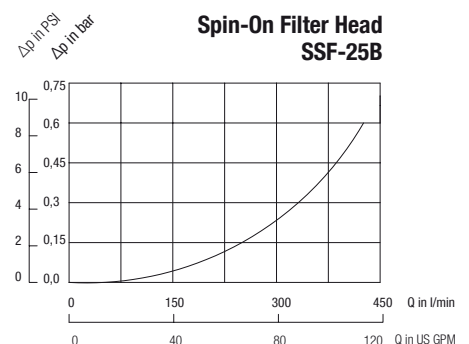

Double Spin-On Filter Heads ■ SSF-25

Dimensions



Technical Data

Construction

- In-line Double Spin-On filter head

Material

- Aluminium

Port Connection

- NPT
- SAE flange

Flow Rate

- 454 l/min / 120 US GPM for return line application
- 132 l/min / 35 US GPM for suction line application

Operating Pressure

- Max. 12 bar / 174 PSI
- Max. 5 bar / 72.5 PSI differential pressure (for any application with no bypass valve)

Temperature Range

- -30 °C ... +100 °C / -22 °F ... +212 °F

Media Compatibility

- Mineral oils, other fluids on request

Options and Accessories



Filter Elements



- For use with SF67 and SFC-57/58 series elements
- For element types with seal contour type A and B
- For element types and flow characteristics see page C143 for SF67 and page C140 for SFC-57/58
- The element is not part of the scope of delivery

Valve

- Bypass valve (integrated in the head): Optional

Clogging Indicators

- Visual clogging indicator with coloured segments
- Electrical clogging switch 0,35 ... 2,5 bar / 5 ... 35 PSI adjustable
- For clogging indicator types see page C147

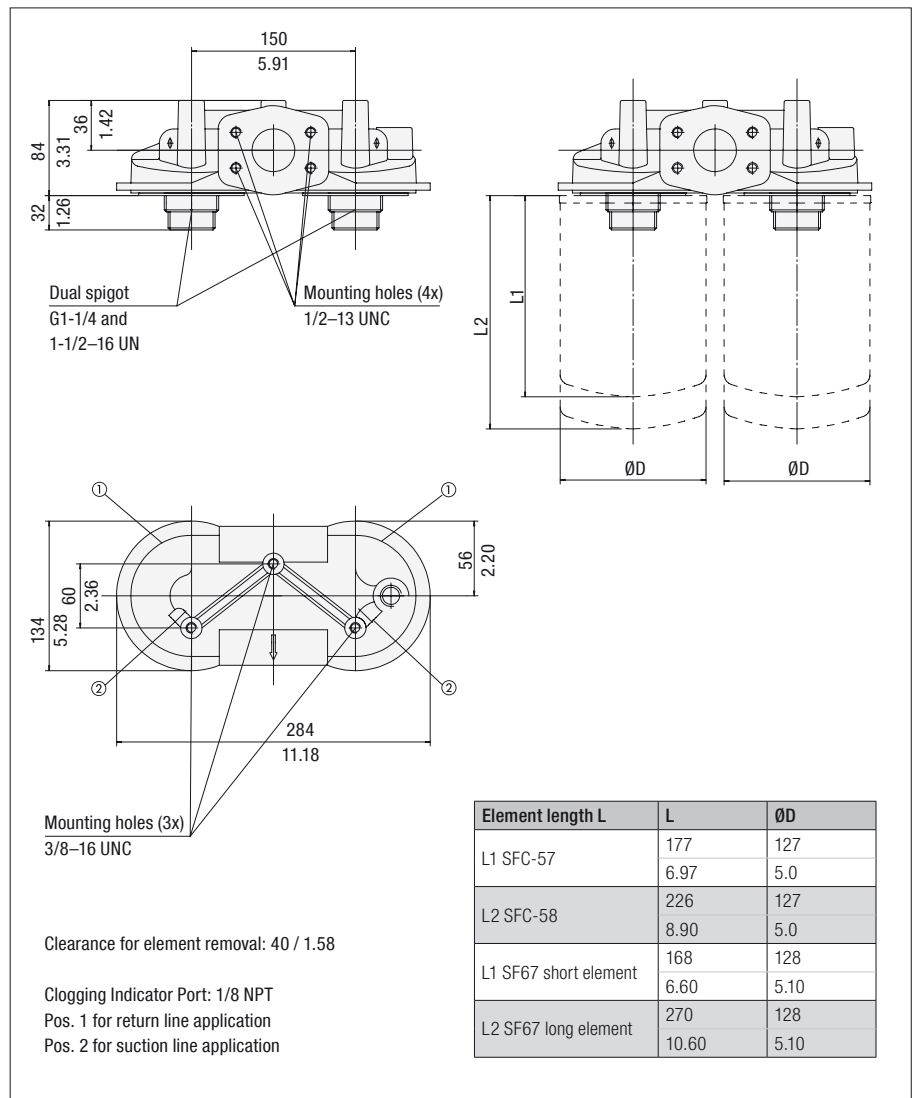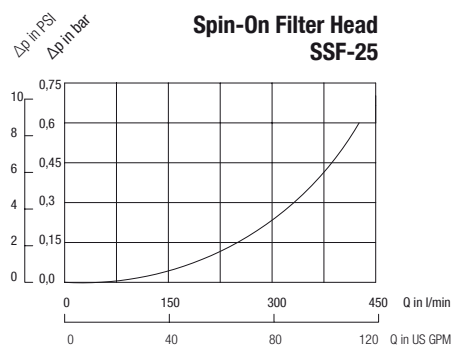

Dimensions in mm / in

Order Code

SSF-25-25-0

1 2 3 4

1 Type

Double Spin-On Filter Head **SSF**

2 Connection Style

Connection	Thread	Code
NPT and SAE Flange	1-1/2 and 2 SAE Code 61 Flange	25

3 Bypass Options

No bypass	00
0,2 bar / 3 PSI	03
0,35 bar / 5 PSI	05
1 bar / 15 PSI	15
1,7 bar / 25 PSI	25


4 Clogging Indicator Port Options

No clogging indicator port	0
Clogging indicator port drilled for return line application	1
Clogging indicator port drilled for suction line application	2
All clogging indicator ports drilled	4
Special	9

Note: Standard clogging indicator port is 1/8 NPT.

Tank Top Spin-On Filter Heads ■ SSFT-12B

Dimensions

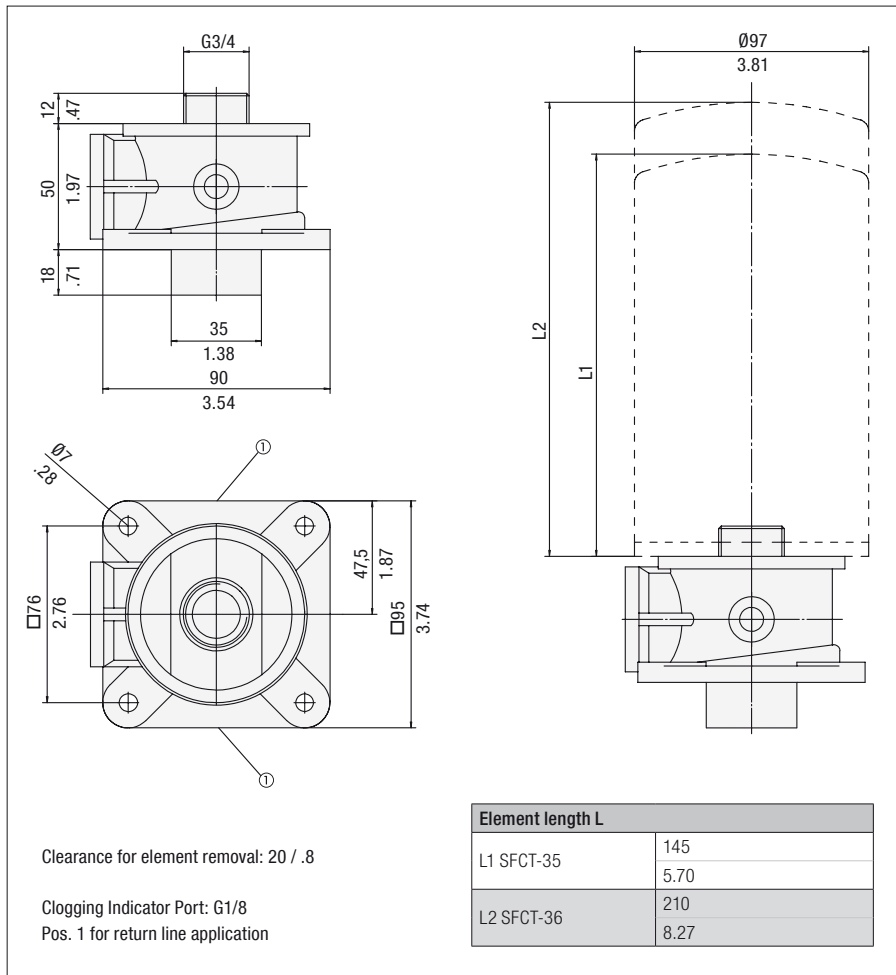

Dimensions in mm / in



Technical Data

Construction

- Tank Top Spin-On filter head

Material

- Aluminium

Port Connection

- BSP

Flow Rate

- 75 l/min / 20 US GPM

Operating Pressure

- Max. 7 bar / 100 PSI

Temperature Range

- 30 °C ... +100 °C / -22 °F ... +212 °F

Media Compatibility

- Mineral oils, other fluids on request

Options and Accessories



Filter Elements

- For use with SFCT-35/36 series elements
- For element types with seal contour type A and B
- For element types and flow characteristics see page C139.
- The element is not part of the scope of delivery

Valve

- Bypass valve 1,7 bar / 25 PSI integrated in the filter element

Clogging Indicators

- Visual clogging indicator with coloured segments
- Electrical clogging switch 0,35 ... 2,5 bar / 5 ... 35 PSI adjustable
- For clogging indicator types see page C147

Order Code

SSFT - 12B - 1
1 2 3

1 Type

Spin-On Filter Head **SSFT**

2 Connection Style


Connection	Thread	Code
BSP	3/4	12B

3 Clogging Indicator Port Options

No clogging indicator port	0
Clogging indicator port drilled for return line application	1
Special	9

Note: Standard clogging indicator port is G1/8.

Spin-On Filter Head SSFT-12B

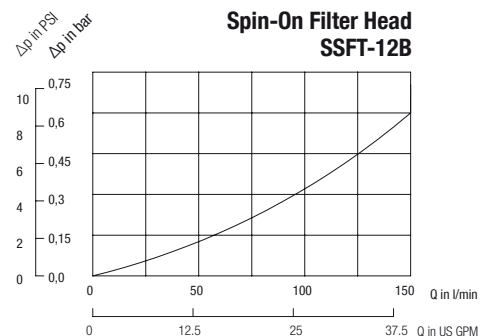

Tank Top Spin-On Filter Heads ■ SSFT-12

Dimensions



Technical Data

Construction

- Tank Top Spin-On filter head

Material

- Aluminium

Port Connection

- NPT

Flow Rate

- 75 l/min / 20 US GPM

Operating Pressure


- Max. 7 bar / 100 PSI

Temperature Range

- -30 °C ... +100 °C / -22 °F ... +212 °F

Media Compatibility

- Mineral oils, other fluids on request

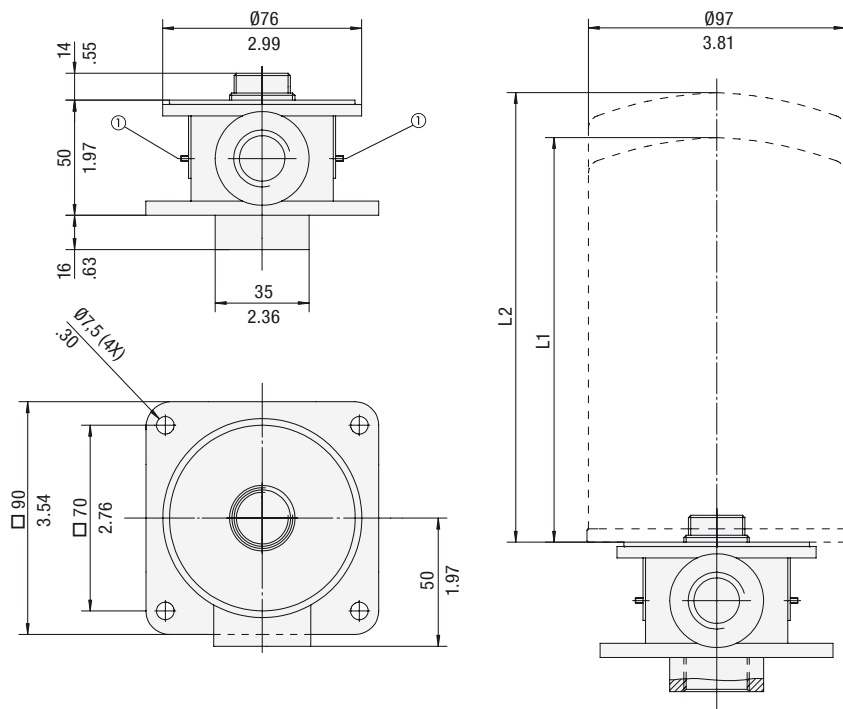

Clearance for element removal: 20 / .8

Clogging Indicator Port: 1/8 NPT

Pos. 1 for return line application

Element length L	
L1 SFCT-35	145
	5.70
L2 SFCT-36	210
	8.27

Dimensions in mm / in

Options and Accessories



Filter Elements

- For use with SFCT-35/36 series elements
- For element types with seal contour type A and B
- For element types and flow characteristics see page C139
- The element is not part of the scope of delivery

Valve

- Bypass valve 1,7 bar / 25 PSI integrated in the filter element

Clogging Indicators

- Visual clogging indicator with coloured segments
- Electrical clogging switch 0,35 ... 2,5 bar / 5 ... 35 PSI adjustable
- For clogging indicator types see page C147

Order Code

SSFT - 12 - 1

1

2

3

1 Type

Spin-On Filter Head **SSFT**


2 Connection Style

Connection	Thread	Code
NPT	3/4	12

3 Clogging Indicator Port Options


No clogging indicator port	0
Clogging indicator port drilled for return line application	1
Special	9

Note: Standard clogging indicator port is 1/8 NPT.

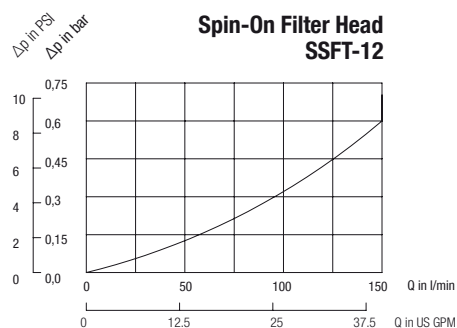

Tank Top Spin-On Filter Heads ■ SSFT-20B

Dimensions

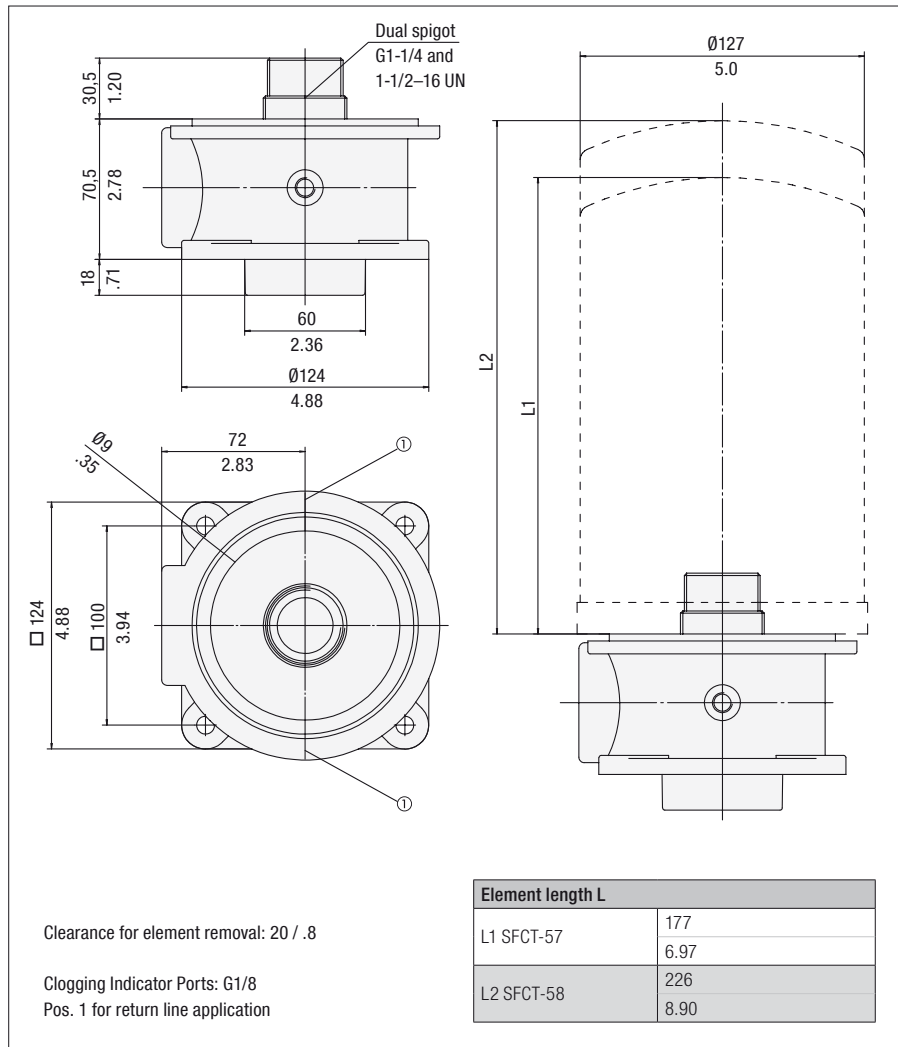

Dimensions in mm / in

Order Code

SSFT - 20B - 1

1

2

3

1 Type

Spin-On Filter Head **SSFT**

2 Connection Style

Connection	Thread	Code
BSP	1-1/2	20B

3 Clogging Indicator Port Options

Clogging indicator port drilled for return line application	1
Special	9

Note: Standard clogging indicator port is G1/8.



Technical Data

Construction

- Tank Top Spin-On filter head

Material

- Aluminium

Port Connection

- BSP

Flow Rate

- 200 l/min / 53 US GPM

Operating Pressure

- Max. 7 bar / 100 PSI

Temperature Range

- 30 °C ... +100 °C / -22 °F ... +212 °F

Media Compatibility

- Mineral oils, other fluids on request

Options and Accessories



Filter Elements


- For use with SFCT-57/58 series elements
- For element types with seal contour type A
- For element types and flow characteristics see page C140
- The element is not part of the scope of delivery

Valve

- Bypass valve 1,7 bar / 25 PSI integrated in the filter element

Clogging Indicators

- Visual clogging indicator with coloured segments
- Electrical clogging switch 0,35 ... 2,5 bar / 5 ... 35 PSI adjustable
- For clogging indicator types see page C147

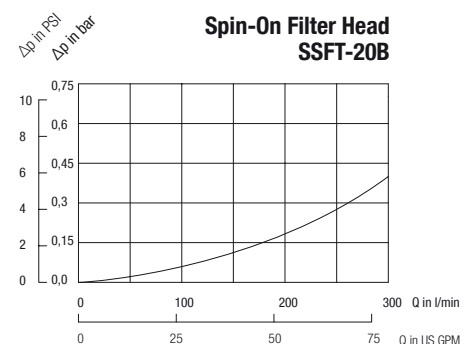

Tank Top Spin-On Filter Heads ■ SSFT-20

Dimensions



Technical Data

Construction

- Tank Top Spin-On filter head

Material

- Aluminium

Port Connection

- NPT

Flow Rate

- 200 l/min / 53 US GPM

Operating Pressure


- Max. 7 bar / 100 PSI

Temperature Range

- -30 °C ... +100 °C / -22 °F ... +212 °F

Media Compatibility

- Mineral oils, other fluids on request

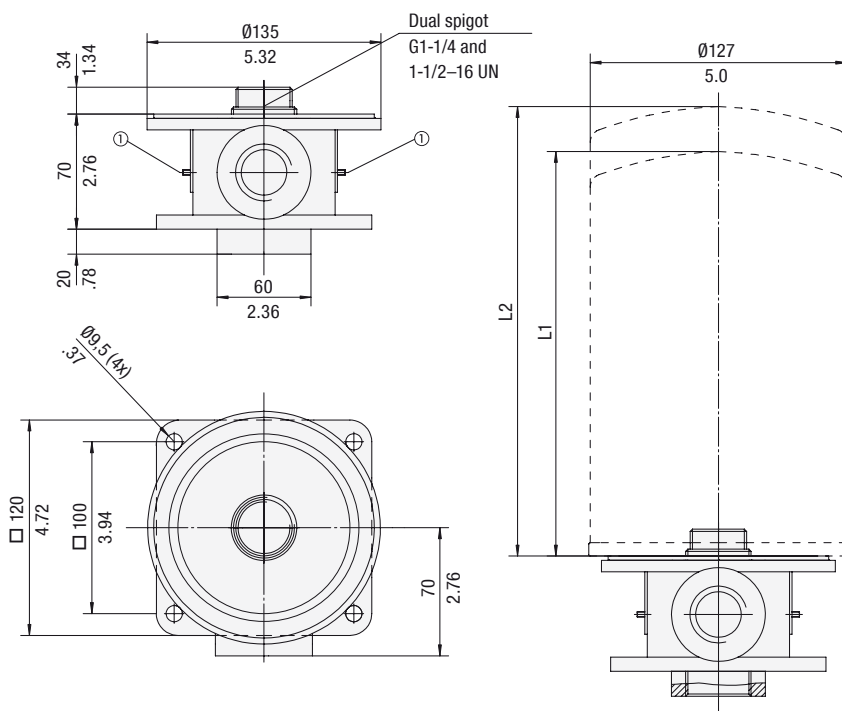

Clearance for element removal: 20 / .8

Clogging Indicator Ports: 1/8 NPT

Pos. 1 for return line application

Element length L	
L1 SFCT-57	177
	6.97
L2 SFCT-58	226
	8.90

Dimensions in mm / in

Options and Accessories



Filter Elements

- For use with SFCT-57/58 series elements
- For element types with seal contour type A
- For element types and flow characteristics see page C140
- The element is not part of the scope of delivery

Valve

- Bypass valve 1,7 bar / 25 PSI integrated in the filter element

Clogging Indicators

- Visual clogging indicator with coloured segments
- Electrical clogging switch 0,35 ... 2,5 bar / 5 ... 35 PSI adjustable
- For clogging indicator types see page C147

Order Code

SSFT-20-1

1 2 3

1 Type

Spin-On Filter Head **SSFT**


2 Connection Style

Connection	Thread	Code
NPT	1-1/2	20


3 Clogging Indicator Port Options

No clogging indicator port	0
Clogging indicator port drilled for return line application	1
Special	9

Note: Standard clogging indicator port is 1/8 NPT.

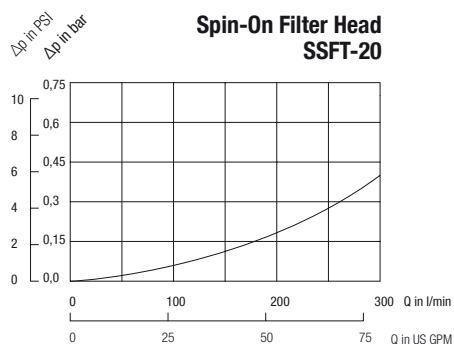

Spin-On Elements ▪ Type SFC-35 / 36 and SFCT-35 / 36

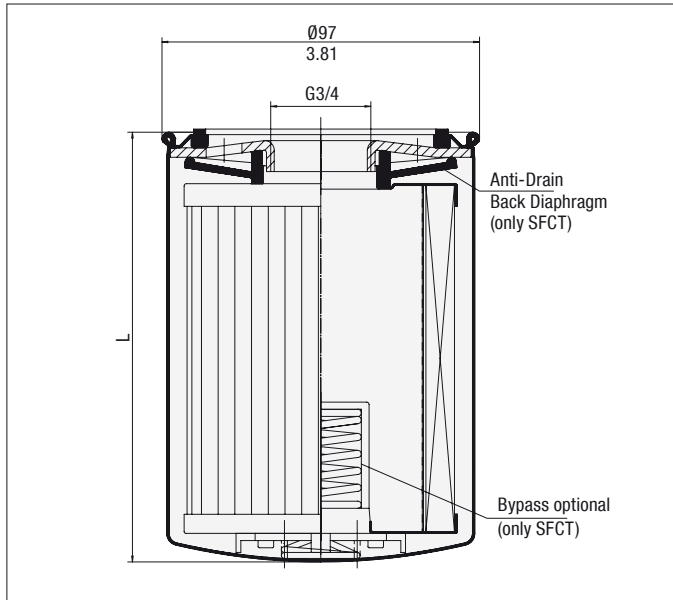

Dimensions in mm / in



Product Description

STAUFF SFC-35/36 series Spin-On Elements are used with the STAUFF SSF-12 Spin-On Filters with G3/4 threaded ports.

STAUFF SFCT-35/36 series Spin-On Elements have an internal 1,7 bar / 25 PSI bypass and anti-drain back diaphragm for use with STAUFF SSF-12 Tank Top Spin-On Filters.

Technical Data

Connection Thread

- G3/4

Operating Pressure

- Max. 12 bar / 174 PSI

Burst Pressure

- Min. 20 bar / 290 PSI

Temperature Range

- -32 °C ... +100 °C / -25 °F ... +212 °F

Seal Contour

- Type A (see page C123)

Differential Pressure

- Paper: Max. 5 bar / 72.5 PSI
- Glass Fibre / Wire Mesh: Max. 10 bar / 145 PSI
- (for any application with no bypass valve)

Bypass Pressure

- 1,7 bar / 25 PSI (only SFCT-series)

Media Compatibility

- Mineral oils, other fluids on request

Dimensions

Order Code	Filter Paper				Inorganic Glass Fibre					
Element without bypass valve	SFC-3510E	SFC-3610E	SFC-3525E	SFC-3625E	SFC-3503AE	SFC-3603AE	SFC-3510AE	SFC-3610AE	SFC-3525AE	SFC-3625AE
Element with bypass valve	SFCT-3510E	SFCT-3610E	SFCT-3525E	SFCT-3625E			SFCT-3510AE	SFCT-3610AE	SFCT-3525AE	SFCT-3625AE
Length L (mm/in)	145 5.7	210 8.27	145 5.7	210 8.27	145 5.7	210 8.27	145 5.7	210 8.27	145 5.7	210 8.27
β-Ratio	$\beta_{10} \geq 2$	$\beta_{10} \geq 2$	$\beta_{25} \geq 2$	$\beta_{25} \geq 2$	$\beta_3 \geq 200$	$\beta_3 \geq 200$	$\beta_{10} \geq 200$	$\beta_{10} \geq 200$	$\beta_{25} \geq 200$	$\beta_{25} \geq 200$
Carton Quantity	1	1	1	1	1	1	1	1	1	1
Carton Weight (kg/lbs)	0,9 2	1,3 2,6	0,9 2	1,3 2,6	0,9 2	1,3 2,6	0,9 2	1,3 2,6	0,9 2	1,3 2,6

Order Code	Wire Mesh		Brass Mesh	
Element without bypass valve	SFC-3560E	SFC-3660E	SFC-35125E	SFC-36125E
Element with bypass valve	SFCT-3560E	SFCT-3660E	SFCT-35125E	SFCT-36125E
Length L (mm/in)	145 5.7	210 8.27	145 5.7	210 8.27
β-Ratio	n/a	n/a	n/a	n/a
Carton Quantity	1	1	1	1
Carton Weight (kg/lbs)	0,9 2	1,3 2,6	0,9 2	1,3 2,6


Spin-On Elements ▪ Type SFC-57 / 58 and SFCT-57 / 58



Product Description

STAUFF Spin-On Filter Elements of the SFC-/SFCT-57/58 series are used with the STAUFF SSF-20/24/25/100/120/130 and 160 series Spin-On Filters with G1-1/4 threaded ports.

STAUFF SFCT-57/58 series Spin-On Elements have an internal 1,7 bar / 25 PSI bypass and anti-drain back diaphragm for use with STAUFF SSF-20 Tank Top Spin-On Filters.

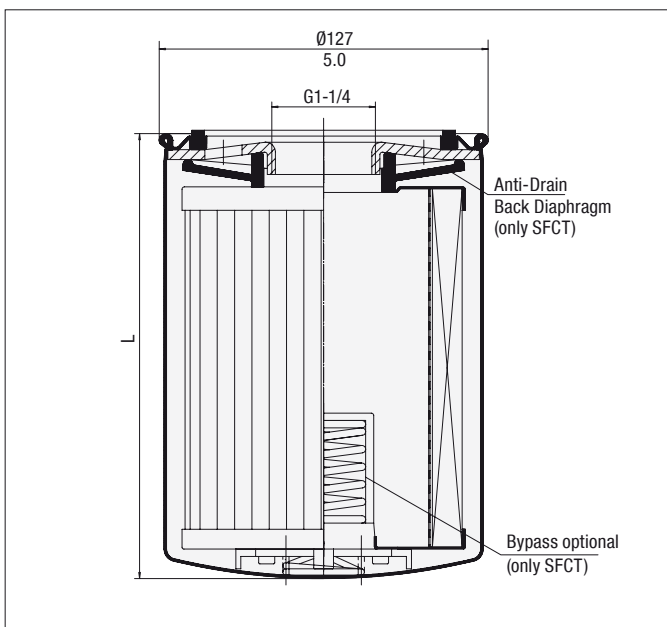

Dimensions in mm / in

Technical Data

Connection Thread

- G1-1/4

Operating Pressure

- Max. 12 bar / 174 PSI

Burst Pressure

- Min. 17 bar / 247 PSI

Temperature Range

- -32 °C ... +100 °C / -25 °F ... +212 °F

Seal Contour

- Type A (see page C123)

Differential Pressure

- Paper: Max. 5 bar / 72.5 PSI
Glass Fibre / Wire Mesh: Max. 10 bar / 145 PSI
(for any application with no bypass valve)











Bypass Pressure





- 1,7 bar / 25 PSI
(only SFCT-series)

Media Compatibility


- Mineral oils, other fluids on request

Dimensions

Order Code	Filter Paper				Inorganic Glass Fibre					
Element without bypass valve	SFC-5710E	SFC-5810E	SFC-5725E	SFC-5825E	SFC-5703AE	SFC-5803AE	SFC-5710AE	SFC-5810AE	SFC-5725AE	SFC-5825AE
Element with bypass valve	SFCT-5710E	SFCT-5810E	SFCT-5725E	SFCT-5825E	SFCT-5703AE	SFCT-5803AE	SFCT-5710AE	SFCT-5810AE	SFCT-5725AE	SFCT-5825AE
										
Length L (mm/in)	177 6.97	226 8.9	177 6.97	226 8.9	177 6.97	226 8.9	177 6.97	226 8.9	177 6.97	226 8.9
β-Ratio	β ₁₀ ≥ 2	β ₁₀ ≥ 2	β ₂₅ ≥ 2	β ₂₅ ≥ 2	β ₃ ≥ 200	β ₃ ≥ 200	β ₁₀ ≥ 200	β ₁₀ ≥ 200	β ₂₅ ≥ 200	β ₂₅ ≥ 200
Carton Quantity	1	1	1	1	1	1	1	1	1	1
Carton Weight (kg/lbs)	1,4 3	1,85 4	1,4 3	1,85 4	1,4 3	1,85 4	1,4 3	1,85 4	1,4 3	1,85 4

Order Code	Wire Mesh		Brass Mesh	
Element without bypass valve	SFC-5760E	SFC-5860E	SFC-57125E	SFC-58125E
Element with bypass valve	SFCT-5760E	SFCT-5860E	SFCT-57125E	SFCT-58125E
				
Length L (mm/in)	177 6.97	226 8.9	177 6.97	226 8.9
β-Ratio	n/a	n/a	n/a	n/a
Carton Quantity	1	1	1	1
Carton Weight (kg/lbs)	0,9 2	1,3 2,6	0,9 2	1,3 2,6

Spin-On Elements ▪ Type SF63

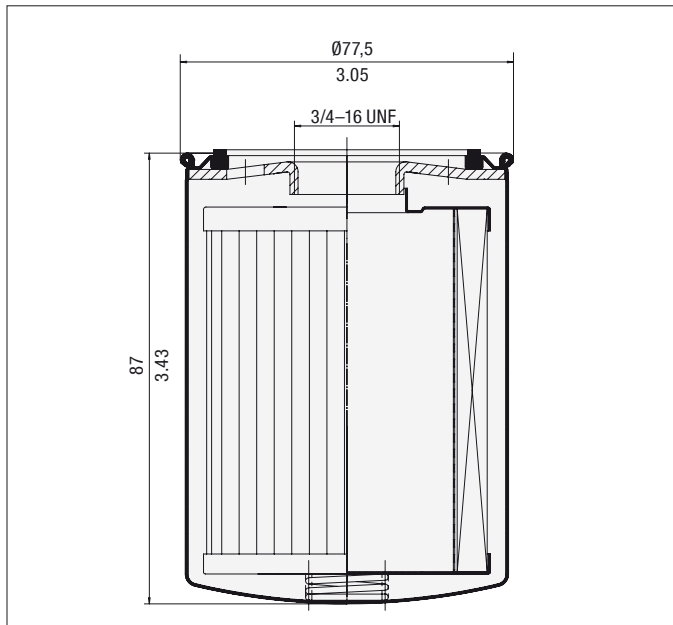

Dimensions in mm / in



Product Description

STAUFF SF63-series Spin-On Elements are used with the STAUFF SLF Spin-On Filters.

Technical Data

Connection Thread

- 3/4-16 UNF

Seal Contour

- Type A (see page C123)

Sealing Material

- NBR (Buna-N®)

Operating Pressure

- Max. 14 bar / 200 PSI

Differential Pressure

- Max. 5,5 bar / 80 PSI
(for any application with no bypass valve)

Burst Pressure

- Min. 20 bar / 290 PSI

Bypass Pressure

- SF6310-18 1,24 bar / 18 PSI
- SF6325-10 0,70 bar / 10 PSI



Temperature Range

- -32 °C ... +100 °C / -25 °F ... +212 °F

Media Compatibility

- Mineral oils, other fluids on request

Dimensions


Order Code	Filter Paper	
	SF6310-18	SF6325-10
	 10µm	 25µm
B-Ratio	$\beta_{10} \geq 2$	$\beta_{25} \geq 2$
Dirt Holding Capacity (g)	6	6
Carton Quantity	12	12
Carton Weight (kg/lbs)	3,6	3,6
	8	8

Spin-On Elements ▪ Type SF65



Product Description

STAUFF SF65-series Spin-On Elements are used with the STAUFF SAF series Spin-On Filters.

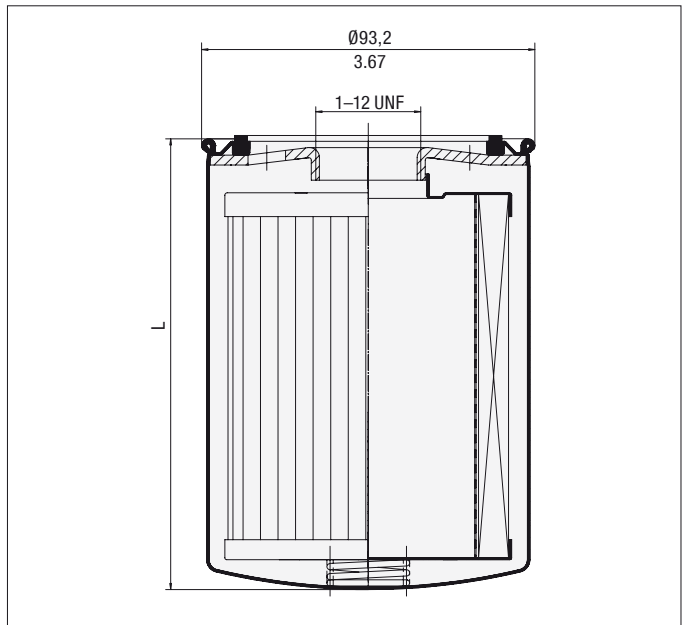

Dimensions in mm / in

Technical Data

Connection Thread

- 1-12 UNF

Sealing Material

- NBR (Buna-N®)

Differential Pressure

- Max. 5,5 bar / 80 PSI
(for any application with no bypass valve)

Temperature Range

- -32 °C ... +100 °C / -25 °F ... +212 °F

Seal Contour

- Type A (see page C123)

Operating Pressure

- Max. 14 bar / 200 PSI
- SF6520-W: Max. 7 bar / 101.5 PSI









Burst Pressure

- Min. 20 bar / 290 PSI


Media Compatibility

- Mineral oils, other fluids on request

Dimensions

Order Code	Filter Paper				Inorganic Glass Fibre			Water Absorbing
	SF6520	SF6521	SF6510	SF6511	SF6549	SF6505	SF6504	SF6520-W
								
Length L (mm/in)	147 5.76	204 8.00	147 5.76	204 8.00	147 5.76	147 5.76	147 5.76	133 5.25
β-Ratio	β ₁₀ ≥ 2	β ₁₀ ≥ 2	β ₂₅ ≥ 2	β ₂₅ ≥ 2	β ₃ ≥ 200	β ₁₂ ≥ 200	β ₂₅ ≥ 200	β ₁₀ ≥ 2
Dirt Holding Capacity ACFTD (g)	14.4	22	20.4	31.2	19	11	26	Water holding capacity 162 ml 5.5 oz
Carton Quantity	12	12	12	12	12	12	12	12
Carton Weight (kg/lbs)	6,3	8,4	6,4	8,8	8,6	8,6	8,6	8,6
	13.9	18.5	14.2	19.4	19	19	19	19

Spin-On Elements ■ Type SF67

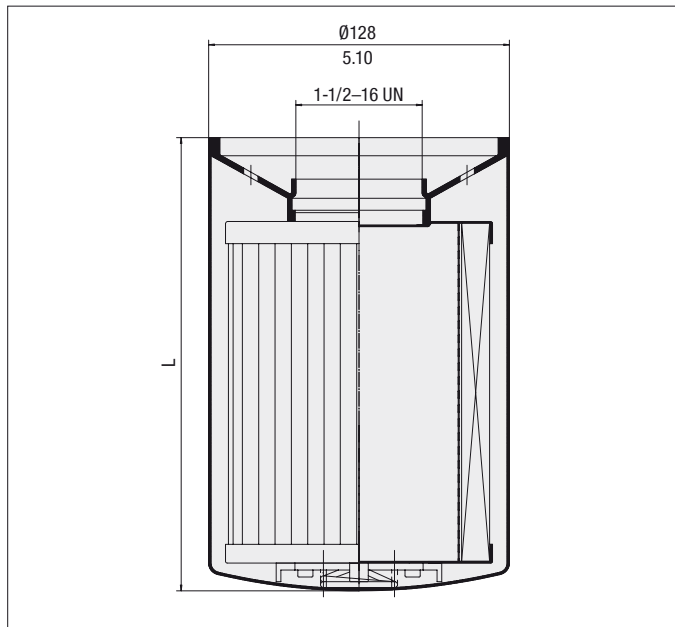

Dimensions in mm / in



Product Description

STAUFF SF67-series Spin-On Elements are used with the STAUFF SSF20/24/25/100/120/130/160/150 and 180 Spin-On Filters.

Technical Data

Connection Thread

- 1-1/2-16 UN

Sealing Material

- NBR (Buna-N®)

Differential Pressure

- Max. 5,5 bar / 80 PSI
(for any application with no bypass valve)

Temperature Range

- 32 °C ... +100 °C / -25 °F ... +212 °F

Seal Contour

- Type B (see page C123)

Operating Pressure

- Max. 14 bar / 200 PSI
- SF6721-W: Max. 7 bar / 101.5 PSI

Burst Pressure

- Min. 20 bar / 290 PSI

Media Compatibility

- Mineral oils, other fluids on request






Dimensions

	Inorganic Glass Fibre								
Order Code	SF6702-MG	SF6703-MG	SF6704-MG	SF6706-MG	SF6707-MG	SF6730-MG	SF6731-MG	SF6728-MG	SF6726-MG
Length L (mm/in)	270 10.6	168 6.6	270 10.6	168 6.6	270 10.6	168 6.6	270 10.6	168 6.6	270 10.6
β-Ratio	β ₁ ≥ 200	β ₃ ≥ 200	β ₃ ≥ 200	β ₆ ≥ 200	β ₆ ≥ 200	β ₁₂ ≥ 200	β ₁₂ ≥ 200	β ₂₅ ≥ 200	β ₂₅ ≥ 200
Dirt Holding Capacity ACFTD (g)	30	31	47	35	54	38	59	50	76
Carton Quantity	6	6	6	6	6	6	6	6	6
Carton Weight (kg/lbs)	11,8 26.1	8,2 18	11,8 26.1	8,2 18	11,8 26.1	8,2 18	11,8 26.1	8,2 18	11,8 26.1

	Filter Paper				Stainless Wire Mesh		Water Absorbing
Order Code	SF6720	SF6721	SF6710	SF6711	SF6790	SF6791	SF6721-W
Length L (mm/in)	168 6.6	270 10.6	168 6.6	270 10.6	168 6.6	270 10.6	270 10.6
β-Ratio	β ₁₀ ≥ 2	β ₁₀ ≥ 2	β ₂₅ ≥ 2	β ₂₅ ≥ 2	n/a	n/a	β ₁₀ ≥ 2
Dirt Holding Capacity ACFTD (g)	34	62	34	62	n/a	n/a	Water holding capacity 444 ml / 15 oz
Carton Quantity	6	6	6	6	6	6	6
Carton Weight (kg/lbs)	6,6 14.6	7,9 17.5	6,7 14.9	9,3 20.6	8,2 18	11,8 26.1	11,8 26.1








Spin-On Elements ▪ Type SFC/SFCT-35/36, SFC/SFCT-57/58 and SF63

The following characteristics are valid for mineral oils with a density of 0,85 kg/dm³ and the kinematic viscosity of 30 mm²/s (30 cSt). The characteristics have been determined in accordance to ISO 3968. SFC-35/36 series Spin-On Elements are used with STAUFF SSF-12 Spin-On Filters, SFCT-35/36 series Spin-On Elements are used with STAUFF SSFT-12 Spin-On Filters, SFC-57/58 series Spin-On Elements are used with STAUFF SSF-20/24/25/100/120/130/160 Spin-On Filters, SFCT-57/58 series Spin-On Elements are used with STAUFF SSFT-20 Spin-On Filters and SF63 series Spin-On Elements are used with STAUFF SLF-02/03/04 Spin-On Filters.

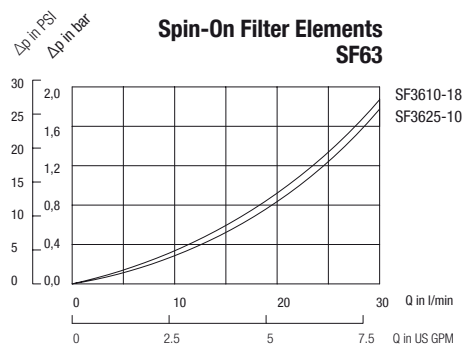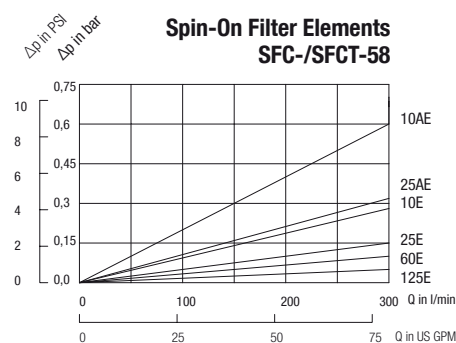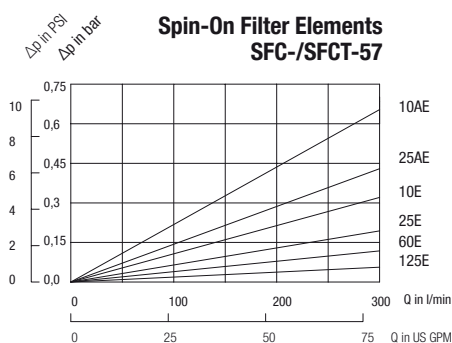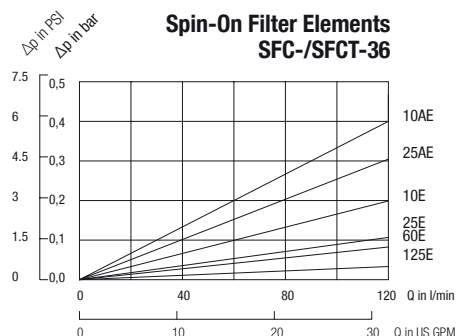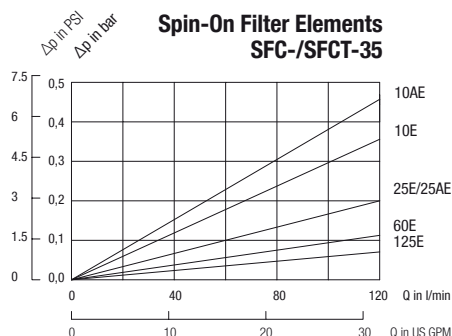

Spin-On Elements ▪ Type SF65


The following characteristics are valid for mineral oils with a density of 0,85 kg/dm³ and the kinematic viscosity of 30 mm²/s (30 cSt). The characteristics have been determined in accordance to ISO 3968. SF65 Spin-On Elements are used with the STAUFF SAF-05/06/07/10/11/13 Spin-On Filters.

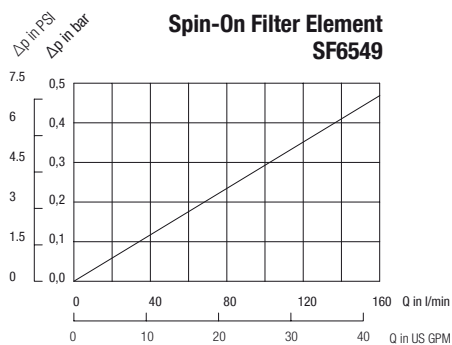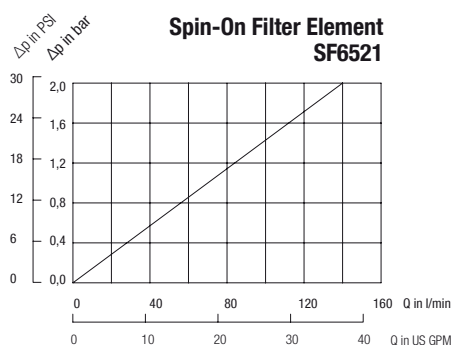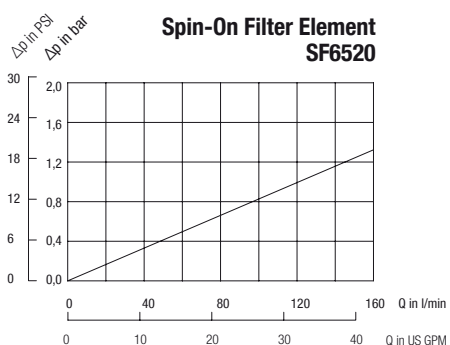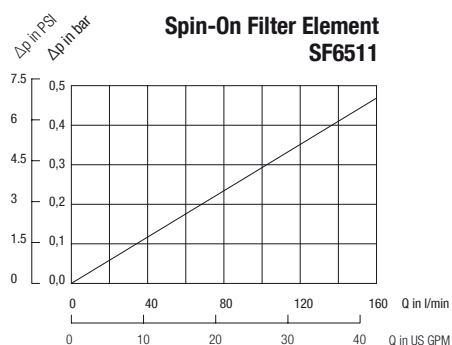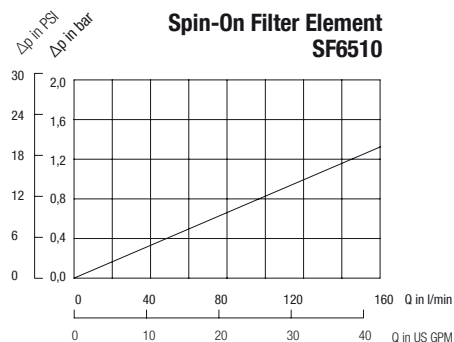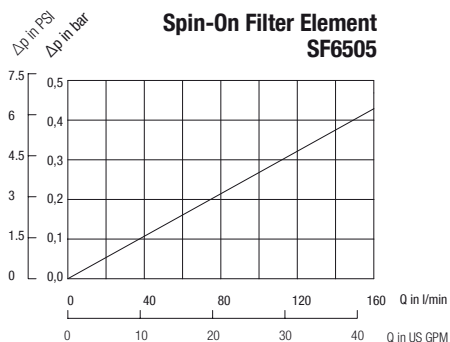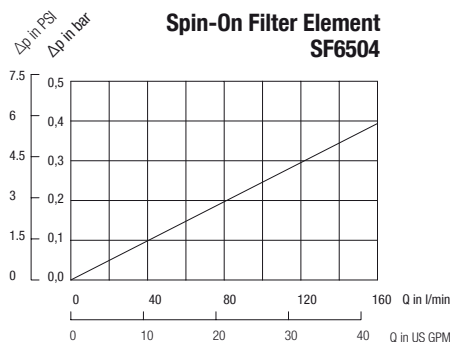


Spin-On Elements ▪ Type SF67

The following characteristics are valid for mineral oils with a density of $0,85 \text{ kg/dm}^3$ and the kinematic viscosity of $30 \text{ mm}^2/\text{s}$ (30 cSt). The characteristics have been determined in accordance to ISO 3968. SF67 Spin-On Elements are used with the STAUFF SSF-20/24/25/100/120/130/160/150/180 Spin-On Filters.


**Spin-On Filter Element
SF6702-MG**

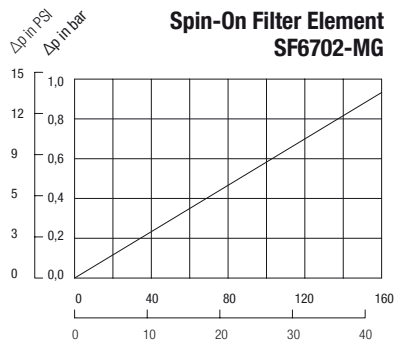


**Spin-On Filter Element
SF6703-MG**

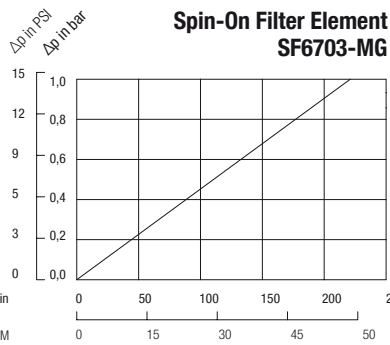


**Spin-On Filter Element
SF6704-MG**

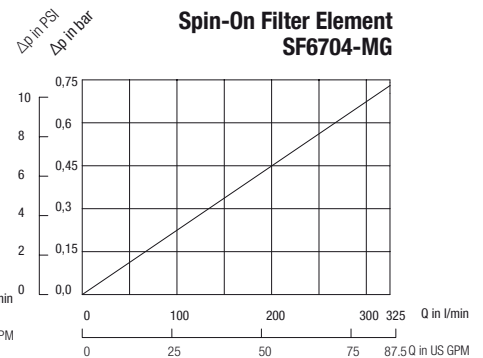


**Spin-On Filter Element
SF6706-MG**

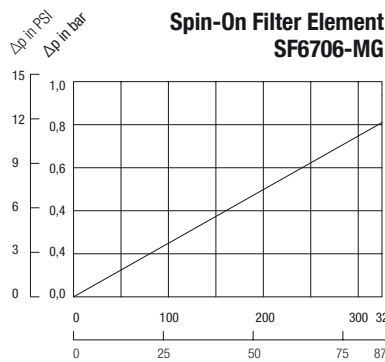


**Spin-On Filter Element
SF6707-MG**

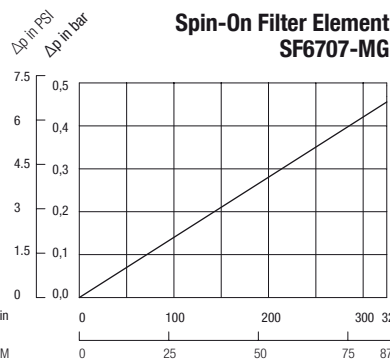


**Spin-On Filter Element
SF6710**

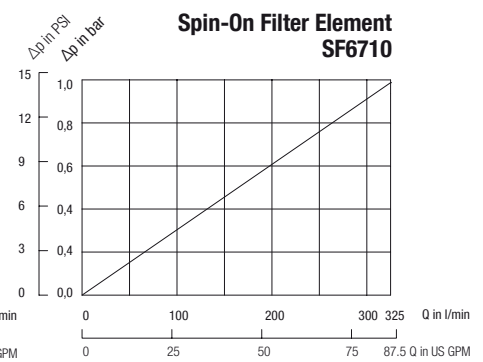


**Spin-On Filter Element
SF6711**

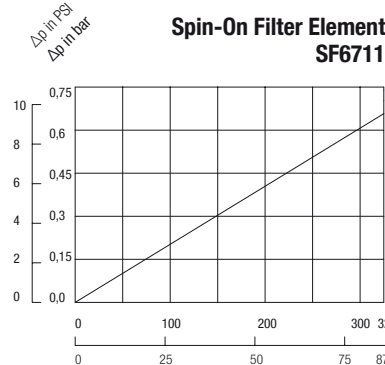


**Spin-On Filter Element
SF6720**

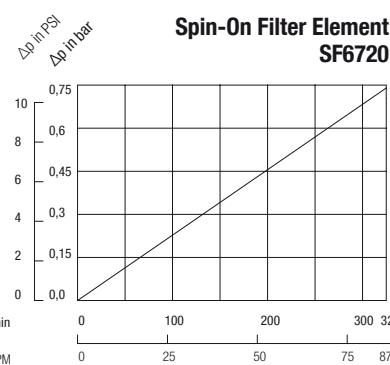


**Spin-On Filter Element
SF6721**

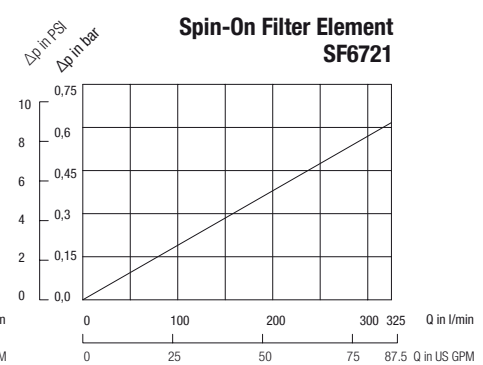


**Spin-On Filter Element
SF6726 -MG**

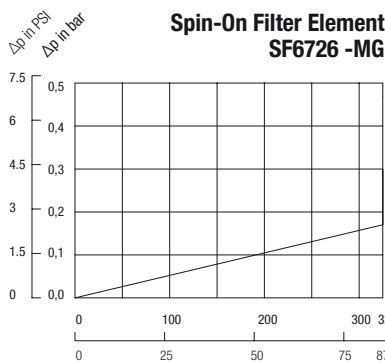


**Spin-On Filter Element
SF6728-MG**

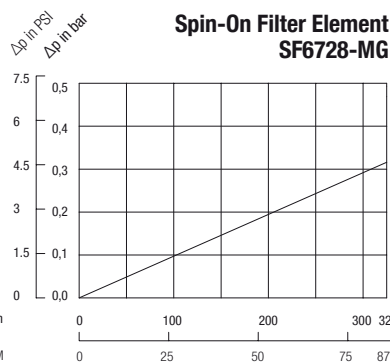


**Spin-On Filter Element
SF6730-MG**

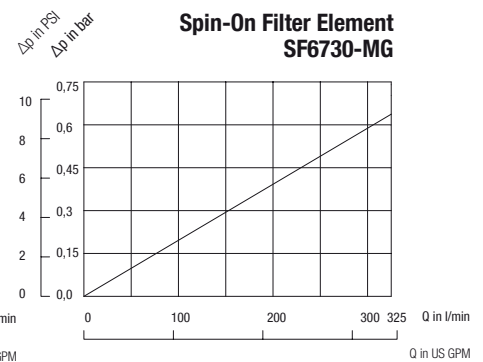

**Spin-On Filter Element
SF6731-MG**

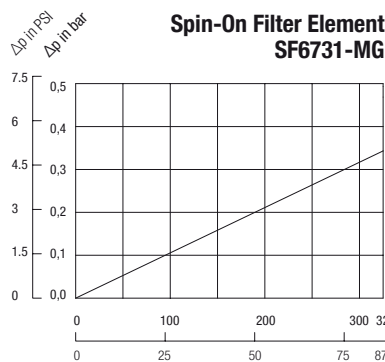

**Spin-On Filter Element
SF6790/91**

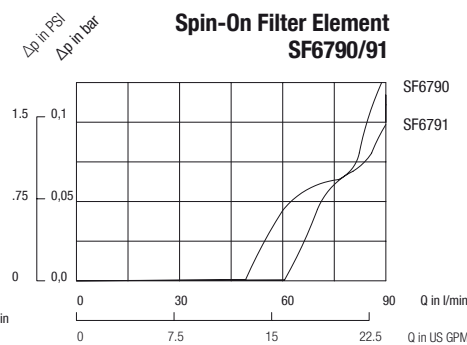

Clogging Indicators

Visual Clogging Indicators



SIS



GV

Visual Vacuum Clogging Indicators (for Spin-On Filter in suction line applications)

	Type	Thread Connection G	Unit of scale	Range of scale	Coloured Segments			Valve setting Spin-On Filter
					Green	Yellow	Red	
BSP	SIS	1/8	cm Hg	-76 ... 0	-13 ... 0	-18 ... -13	-76 ... -18	0,2 bar/ 3 PSI
	GV-5	1/8	in Hg	-30 ... 0	-4 ... 0	-6 ... -4	-30 ... -6	0,2 bar/ 3 PSI
NPT	GV-10	1/8	in Hg	-30 ... 0	-9 ... 0	-11 ... -9	-30 ... -11	0,35 bar/ 5 PSI



SIM



CI

Visual Pressure Clogging Indicators (for Spin-On Filter in return line applications)

	Type	Thread Connection G	Unit of scale	Range of scale	Coloured Segments			Valve setting Spin-On Filter
					Green	Yellow	Red	
BSP	SIM-02	1/8	bar	0 ... 2,5	0 ... 1,2	1,2 ... 1,5	1,5 ... 2,5	1,7 bar / 25 PSI
	SIM-04	1/8	bar	0 ... 4	0 ... 2,5	2,5 ... 3	3 ... 4	1,7 bar/ 25 PSI
	SIM-12	1/8	bar	0 ... 12	without coloured segments			1,7 bar/ 25 PSI
NPT	CI-12	1/8	PSI	0 ... 100	0 ... 13	13 ... 15	15 ... 100	1 bar/ 15 PSI
	CI-20	1/8	PSI	0 ... 100	0 ... 21	21 ... 25	25 ... 100	1,7 bar/ 25 PSI

Electrical Clogging Indicators



SIE-NO/NC



EPS/EVS

Electrical Clogging Indicators (for Spin-On Filter in return line or suction line applications)

	Type	Thread Connection G	Unit of scale	Adjustable range / Actuating pressure	Max. over pressure	Spin-On filter application	Valve setting Spin-On Filter
BSP	SIE-NO	1/8	bar	1,3 (normally open)	80 bar / 1160 PSI	Return line application	1,7 bar / 25 PSI
	SIE-NC	1/8	bar	1,3 (normally closed)	80 bar / 1160 PSI	Return line application	1,7 bar / 25 PSI
	EPS-1B	1/8	bar	0,35 ... 2,5	25 bar / 362 PSI	Return line application	1,7 bar / 25 PSI
	EVS-1B	1/8	mbar	-1000 ... -150	25 bar / 362 PSI	Suction line application	0,2 bar / 3 PSI
NPT	EPS-1	1/8	PSI	5 ... 35	24 bar / 350 PSI	Return line application	1,7 bar / 25 PSI
	EVS-1	1/8	in Hg	-30 ... -5	24 bar / 350 PSI	Suction line application	0,2 bar / 3 PSI


Technical Data SIE / EPS / EVS

	Type EPS-1 / 1B	Type EVS-1 / 1B
Electrical data	6 Amp 125/250 V AC	
Protection	DIN 43650 IP65	
Temperature Range	-5 °C ... +90 °C / +23 °F ... +194 °F (ambient and media)	
Diaphragm Material	NBR (Buna-N®)	NBR (Buna-N®)
Housing Material	Brass	Steel
Adjustable Range	0,35 bar ... 2,0 bar / 5 ... 30 PSI	150 ... 1000 mbar / 5 ... 30 in Hg
Dead Band	20% F.S.	25% F.S.
Weight	0,1 kg / .22 lbs	0,1 kg / .22 lbs
Repeatability	± 2%	
Hirschmann Connector With Strain Relief		


	Type SIE (electrical switch)
Electrical data	48V
Protection	DIN 43650 IP54
Temperature Range	-5 °C ... +60 °C / +23 °F ... +140 °F (ambient and media)
Diaphragm Material	NBR (Buna-N®)
Housing Material	Brass
Actuating Pressure	1,3 bar / 19 PSI
Max. current (res.)	0,5 A
Max. current (ind.)	0,2 A
Available as "normally open" (closes contact at actuating pressure) and as "normally closed" (opens contact at actuating pressure)	

Dimensions


Type SIM / SIS

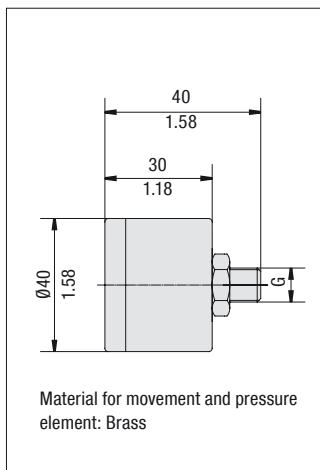


Type GV / CI

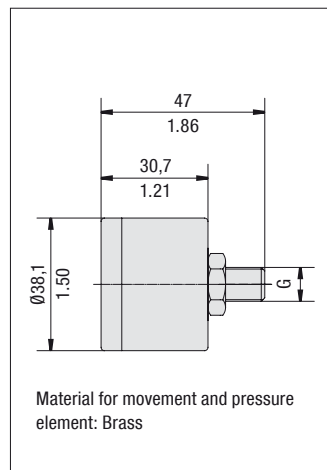


Type SIE

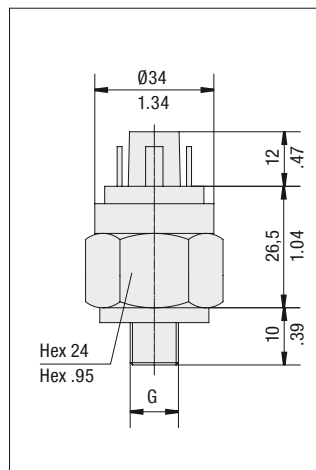

Type EPS / EVS

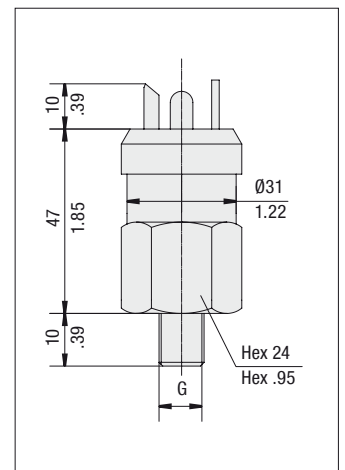

Note: The customer / user carries the responsibility for the electrical connection.

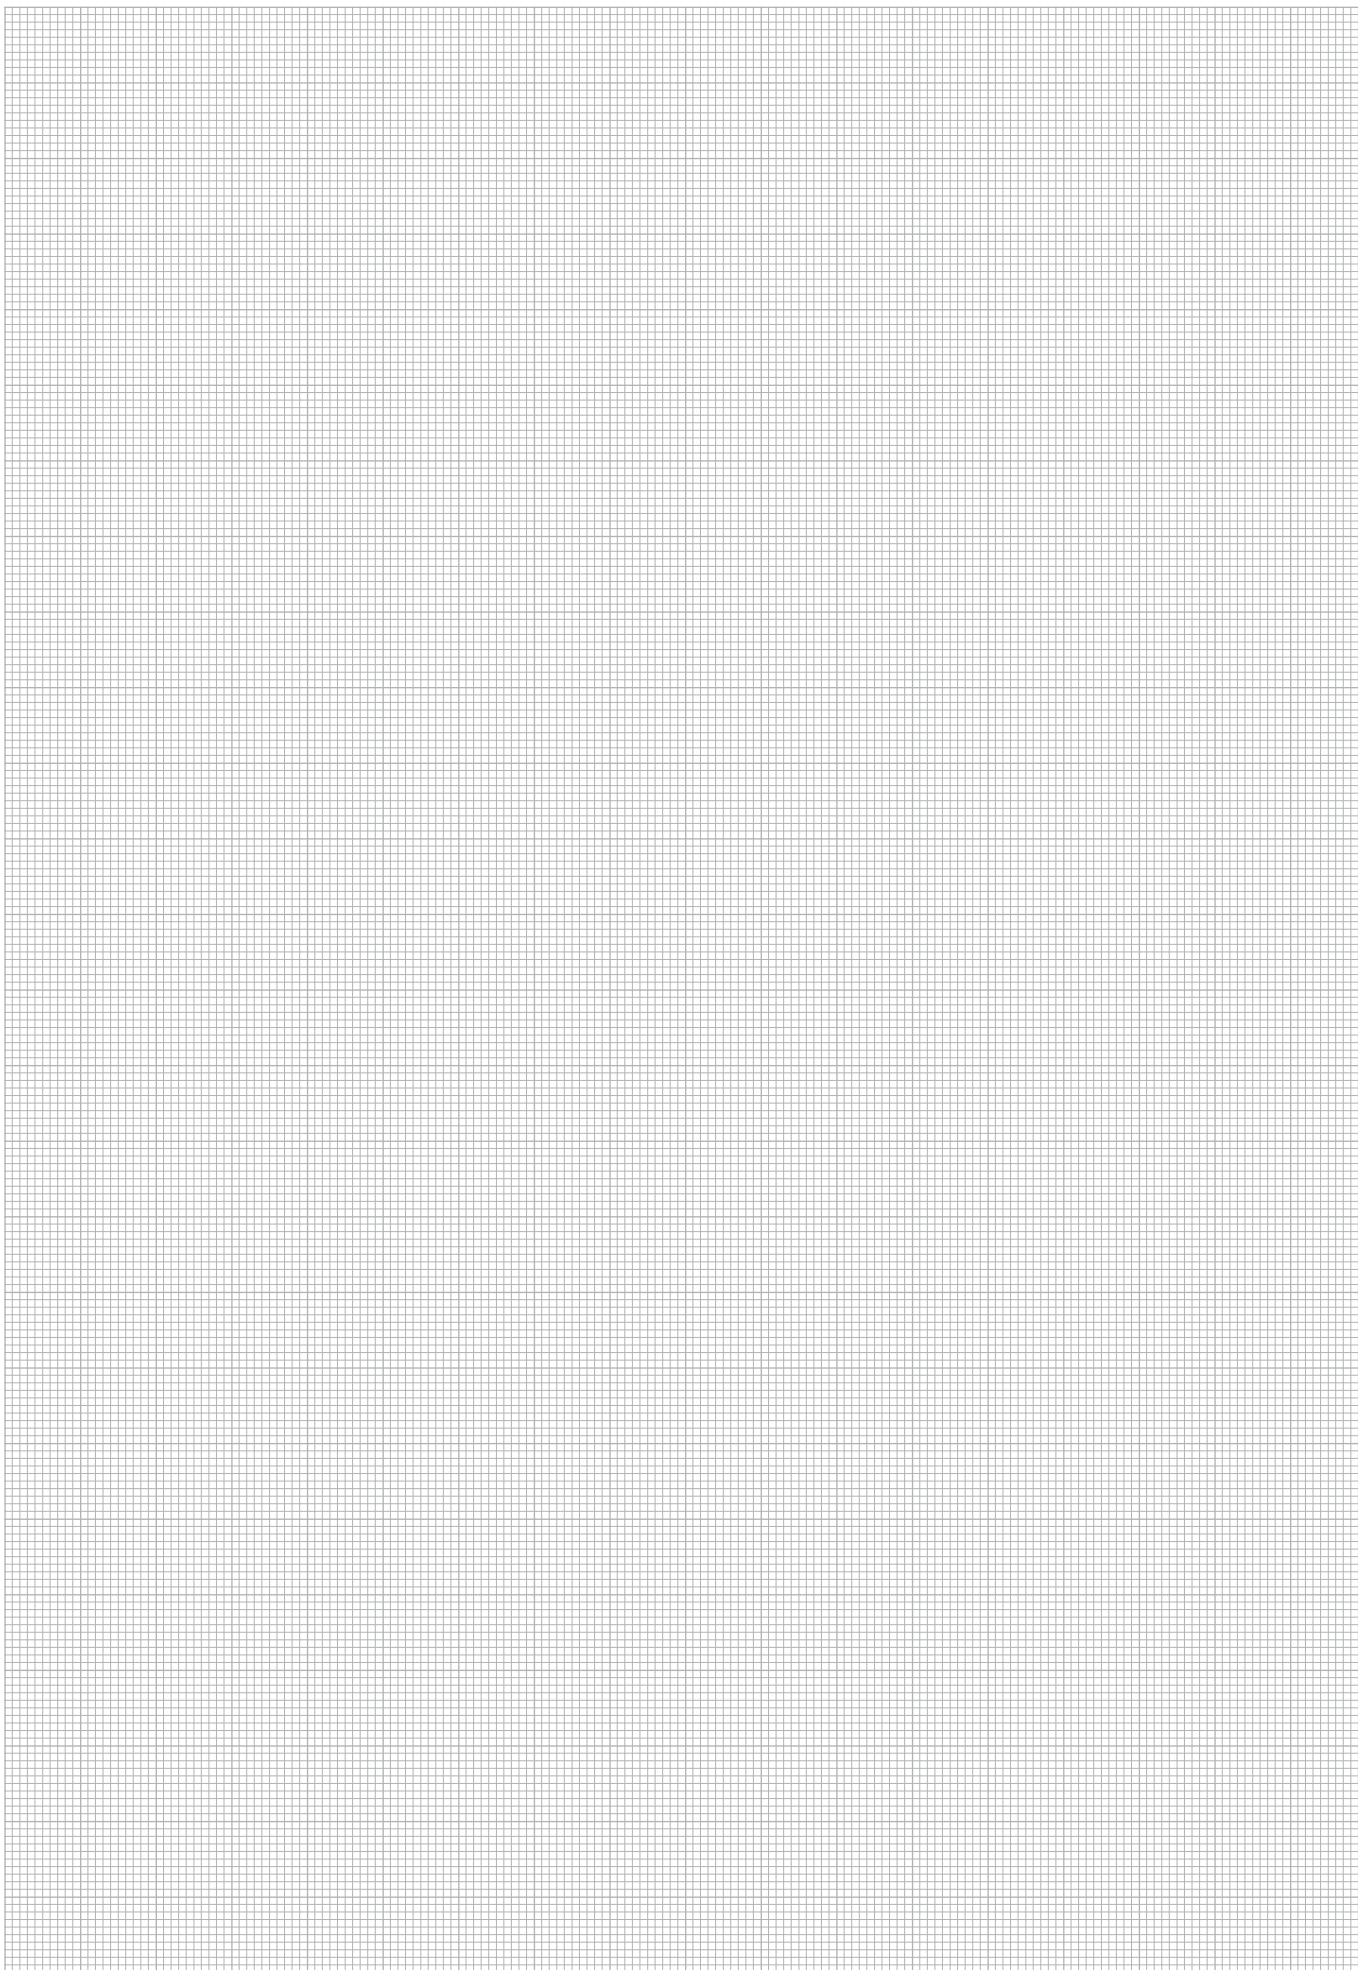

Product Description

STAUFF Offline and Bypass Filter Systems are designed to keep hydraulic and lubrication systems free of particles and water contamination. STAUFF OLS and BPS Units utilize the STAUFF Systems concept for the removal of contamination from hydraulic and lubrication systems. Desiccant Air Breathers, which clean and dry the air entering the reservoir, are also part of this contamination removal system.

STAUFF Systems will provide optimal system cleanliness for today's sophisticated hydraulic and lubrication systems.



Technical Data

Construction

- OLS: Offline Filter System with integrated motor / pump unit
- BPS: Bypass Filter System

Materials

- Housing: Anodized Aluminium
- Sealings: NBR (Buna-N®)

Port Connection

- OLS: G3/8, G1/2, G3/4 and 18 L
- BPS: G1/4 and G1/2

Differential Pressure

- Max. 6,2 bar / 90 PSI

Nominal Flow

- 2,1 ... 17 l/min / .55 ... 4.5 US GPM

Max. System Volume

- Up to 10800 l / 2853 gal

Temperature Range

- Max. +80 °C / +176 °F media temperature

Media Compatibility

- Mineral and lubrication oils, other fluids on request

Options and Accessories

Valve

- Bypass valve: Setting 6,2 bar / 90 PSI integrated in filter head

Clogging Indicator

- Visual clogging indicator


Motor Types (only OLS)

- Several motor types available
for more information please have a look at page C156

The STAUFF System



Filter Element SRM-30

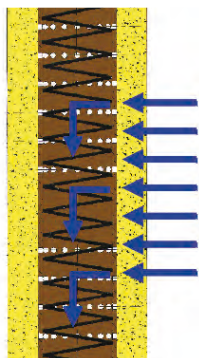

Filter Element Design



Air Conditioners SDB / SVDB

System Contamination

In today's hydraulic market it is an accepted fact that contamination causes 70 % of all mechanical failures. This contamination results from the presence of solid particles such as metal, sand and rubber.

Changes in temperature cause water vapour to condense, resulting in unwanted water in the oil, the presence of this water accelerates the deterioration of the oil.

Mainstream filters are incapable of removing particles, smaller than 2 micron (better known as silt). Fluctuations in pressure and flow result in changing conditions preventing these filters from carrying out fine filtration; most of the silt remains in the system affecting the chemical composition of the oil.

All these problems lead to reduced oil life and increased component wear, maintenance costs and machine down time.

Removing silt and preventing the formation of free water will combat these problems.

Micro Filtration

At the heart of the STAUFF Offline and Bypass Filter Unit is the unique microfilter element. This filter is designed with a radial flow path.

The element is constructed with 0,5 micron media and is therefore able to remove the smallest particles (silt) from the oil.

The filter material is composed primarily of cellulose, which is applied by a special wrapping method. Glass fibre and water absorbing elements are available on request.

The cellulose material is capable of retaining solid particles and absorbing water. This helps to prevent chemical deterioration of the oil and the formation of various acids and sludge.

Hydraulic cylinder extension for example, can draw air, solid contamination particles and water vapour into the oil reservoir.

The water vapour condenses due to temperature changes and causes not only oxidation of the oil, but can also lead to serious mechanical wear in the system.

Air Conditioning

Standard air filters remove a certain amount of solid particle contamination from the air but allow water vapour, to pass through.

The STAUFF "Air conditioners" type SDB and SVDB ensure that incoming air is first dried and then filtered. The SDB and SVDB units should be used in conjunction with the OLS / BPS Systems in order to provide a more complete filtering system. See Hydraulic Accessories section of this catalog, pages E30 to E33 for more details.

Advantages

- Less malfunction
- Protection of expensive main stream filters
- Less frequent oil changes
- Extended Usable life of the oil
- Less machine downtimes

Characteristics

- A filter fineness of 0,5 micron $B_{0,5} \geq 200$, $B_2 \geq 2330$
- Large particle collection capacity
- High filtration capacity due to depth effect
- Large water adsorption capacity
- Do not adversely affect viscosity or additives
- Do not remove additives
- Reduce the oxidation process
- Reduce the forming of acids
- With two measuring points for particle counter or oil sampling
- Save Cost

Applications

- | | |
|---|---|
| <ul style="list-style-type: none"> ▪ Mining ▪ Harvesting ▪ Forestry ▪ Agricultural ▪ Off-road ▪ Fishing ▪ Road construction ▪ Cranes ▪ Airport equipment ▪ Flight simulators ▪ Pulp and paper ▪ Food processing | <ul style="list-style-type: none"> ▪ Presses ▪ Automotive industry ▪ Timber plants ▪ Plastic and rubber ▪ Metal industry ▪ Cement and concrete ▪ Material handling ▪ Bridges/Hydraulic locks/Water works ▪ Petrochemical industry ▪ Power stations ▪ Marine ▪ Steel |
|---|---|

Offline Filters ■ Type OLS
Product Description

STAUFF Offline Filter Units can be applied to every imaginable industrial application where hydraulic or lubrication systems are present.

An integrated motor/pump unit draws fluid out of the tank, filters it and pumps clean oil back into the system. Offline Filter Units can continue to work even when the main system is not in use. The standard range offers filter units for reservoirs with a capacity of up to 10800 l / 2853 gal.

Over the years, STAUFF Systems have developed considerable experience in the hydraulic and lubrication market cleaning systems to levels not previously possible with conventional methods.

With its integrated motor/pump unit STAUFF OLS Filter Systems are specially designed for Offline filtration of a hydraulic main system. This allows continuous filtration of the fluid even when the main system has been shut down.

The OLS is available with one, two or four filter housings and in two different lengths. The maximum flow for the Offline Unit goes from 2,1 ... 17 l/min / .55 ... 4.5 US GPM at a viscosity between 20 ... 160 cSt. For the OLS you can choose several different motor/pump units, for more information please see page C156 (Order code).

**All Offline Filter Systems are available with air driven motors.
These units are ideal for areas where electric power is unavailable
or for hazardous locations.**

Single Length (see page C152 / C153)

OLS - 1A - 30 - H - B

OLS - 2A - 30 - H - B

OLS - 4A - 30 - H - B

Double Length (see page C154 / C155)


OLS - 1B - 30 - H - B

OLS - 2B - 30 - H - B


OLS - 4B - 30 - H - B


Offline Filters ■ Type OLS


Dimensions OLS - 1A - 30 - H - B

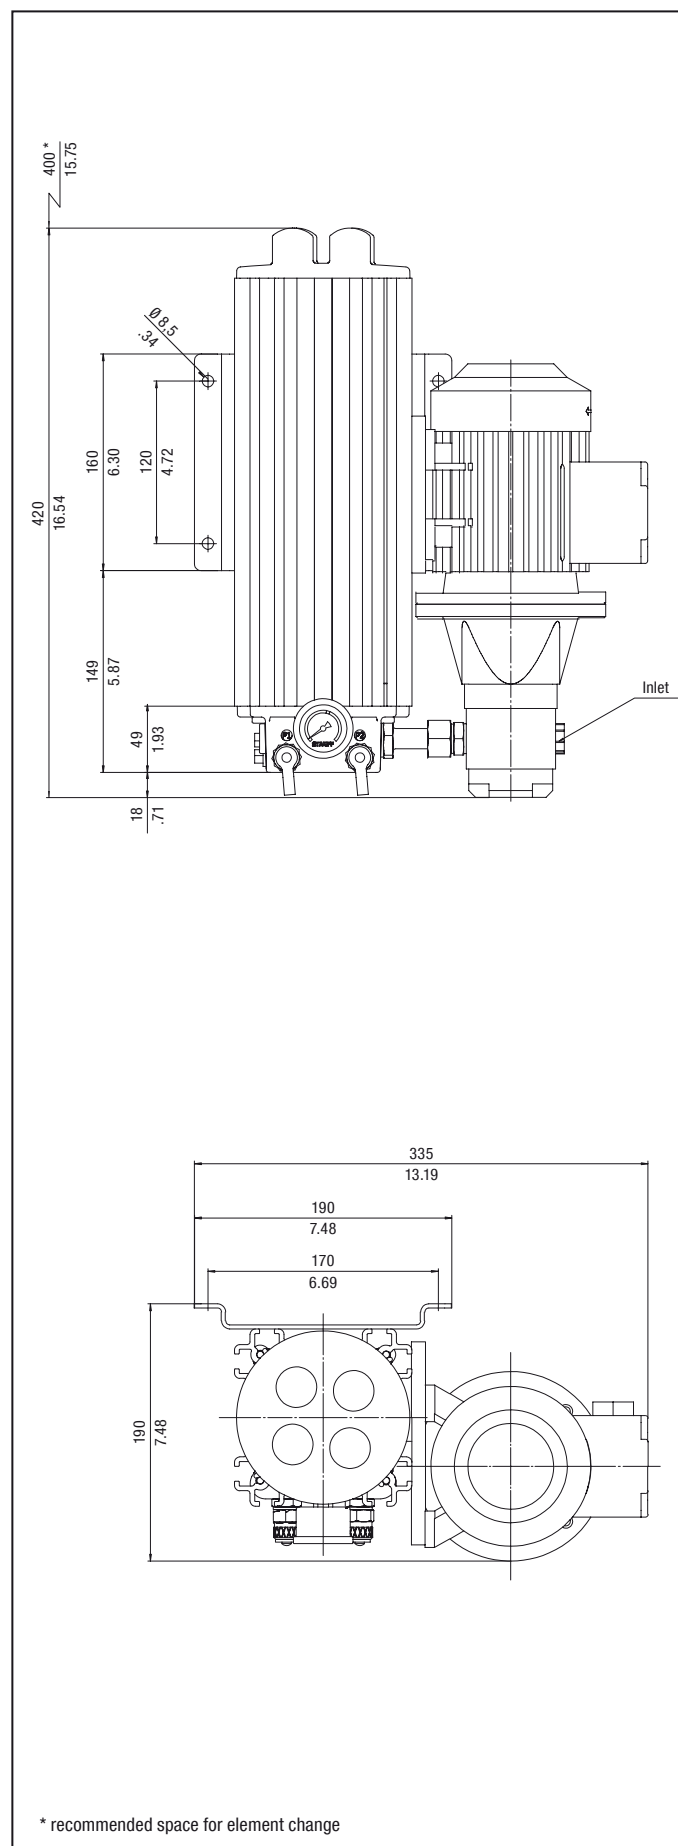

Dimensions OLS - 2A - 30 - H - B

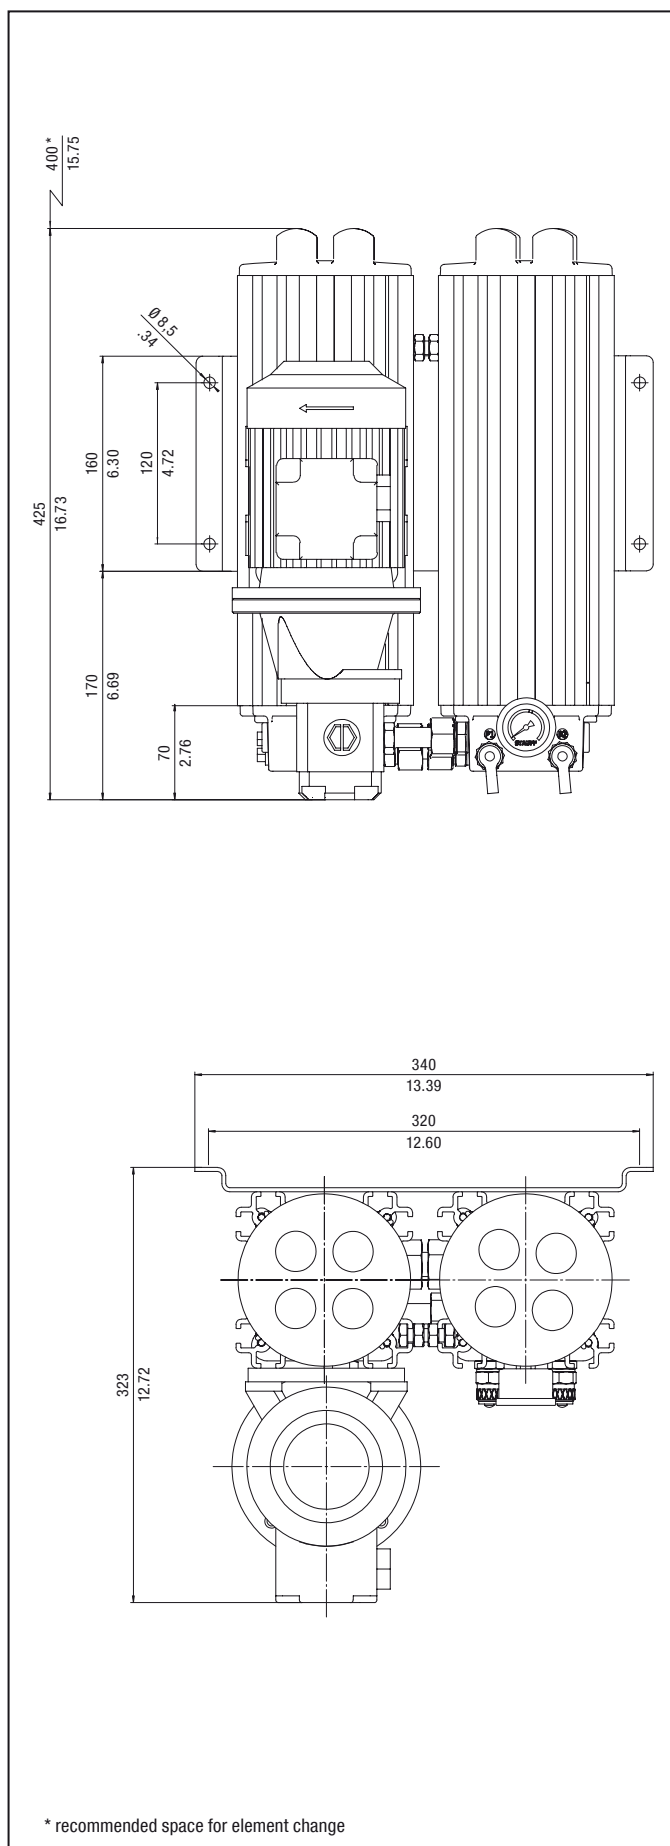

All dimensions in mm / in

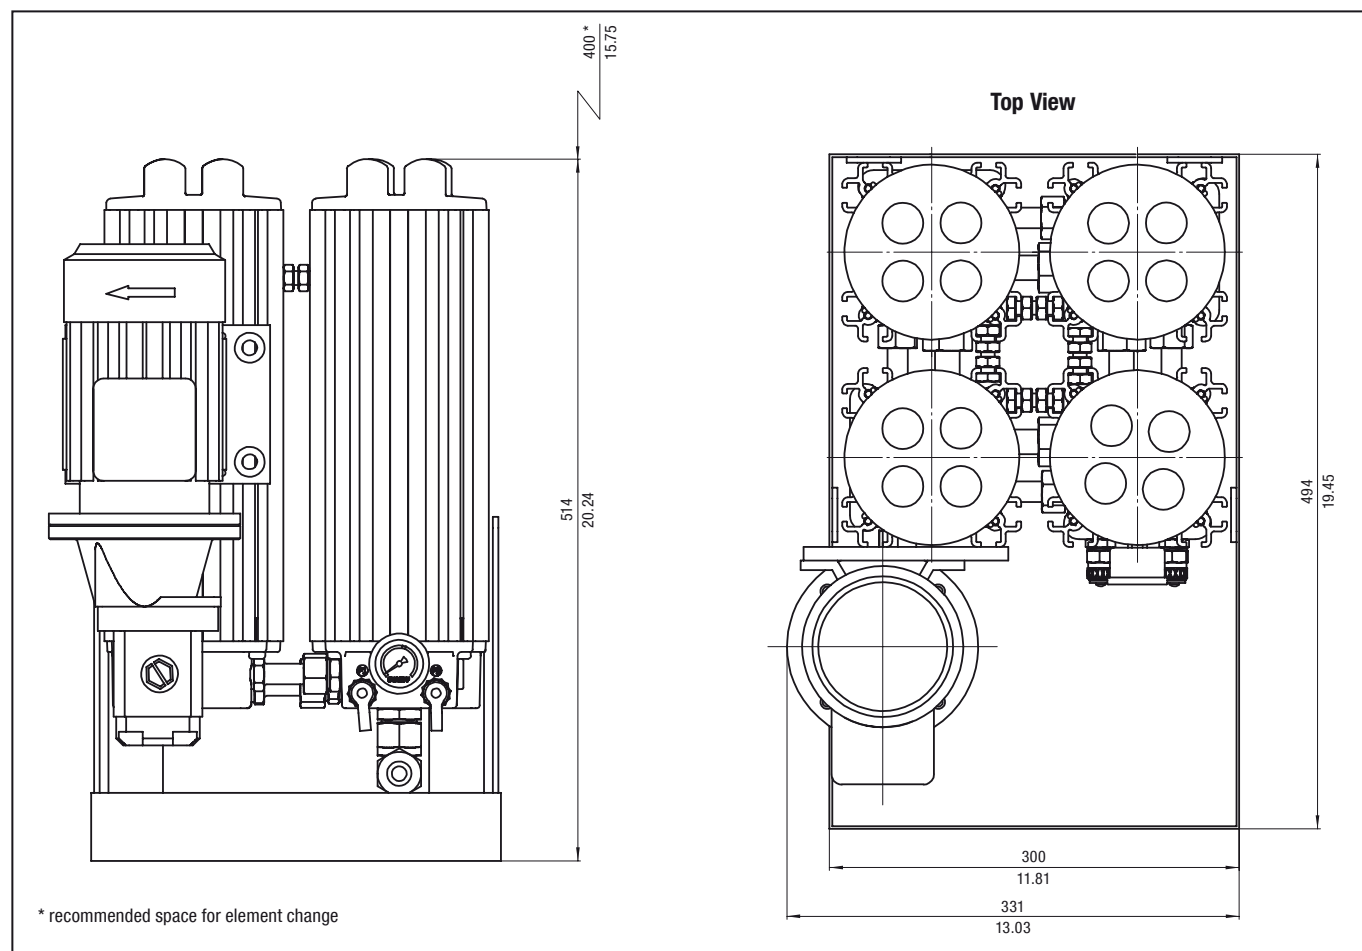Offline Filters ■ Type OLS
Dimensions OLS - 4A - 30 - H - B


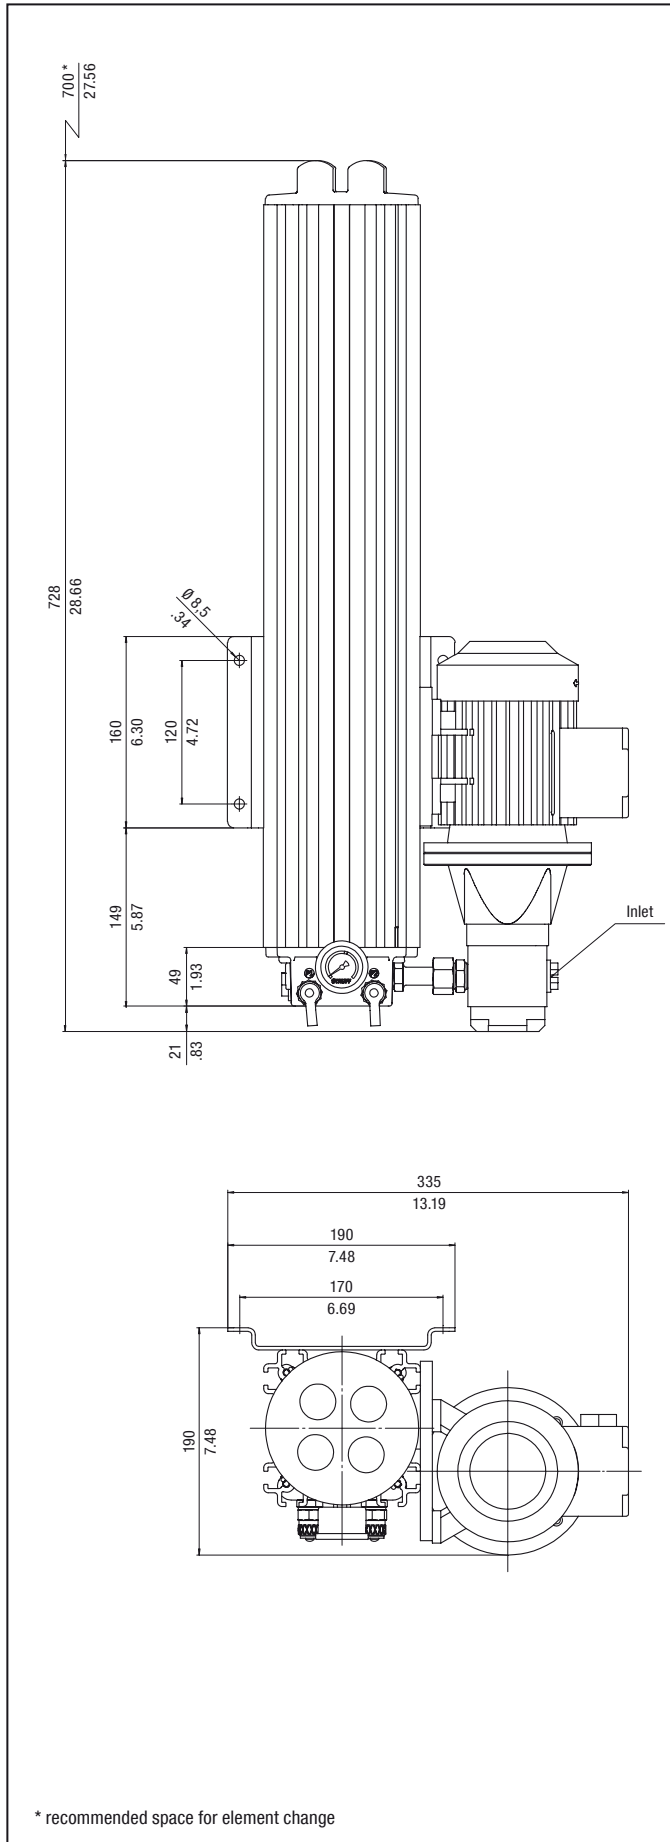
All dimensions in mm / in

Technical Data


	OLS-1A-30-H-B	OLS-2A-30-H-B	OLS-4A-30-H-B
Number of Filter Housings	1	2	4
Nominal Flow	2,1 l/min .55 US GPM	4,2 l/min 1.1 US GPM	8,4 l/min 2.22 US GPM
Max. Differential Pressure	Max. 6,2 bar 90 PSI over the filter element without backpressure		
Max. Fluid Temperature	+80 °C +176 °F		
Max. Housing Pressure	20 bar 290 PSI		
Viscosity Range	20 ... 160 cSt 100 ... 750 SUS		
Connection Suction Side	G3/8	G1/2	
Connection Return Line Side	G1/2		EW 18L-3/4
Hose Diameter	1/2 in (inner diameter) flexible hose		3/4 in (inner diameter) flexible hose
Weight (Including Element)	14 kg 30.9 lbs	21 kg 46.3 lbs	39 kg 86 lbs
Max. System Volume	1350 l 356 gal	2700 l 713 gal	5400 l 1426 gal
Dimensions HxWxD	420 x 335 x 190 mm 16.54 x 13.19 x 7.48 in	425 x 340 x 323 mm 16.73 x 13.39 x 12.72 in	514 x 494 x 331 mm 20.24 x 19.45 x 13.03 in
Connection for Online Particle Counter	STAUFF Test (M16 x 2)		
Pump	Gear pump		
Motor	See page C156 for electric motor details		

Offline Filters ■ Type OLS


Dimensions OLS - 1B - 30 - H - B



Dimensions OLS - 2B - 30 - H - B

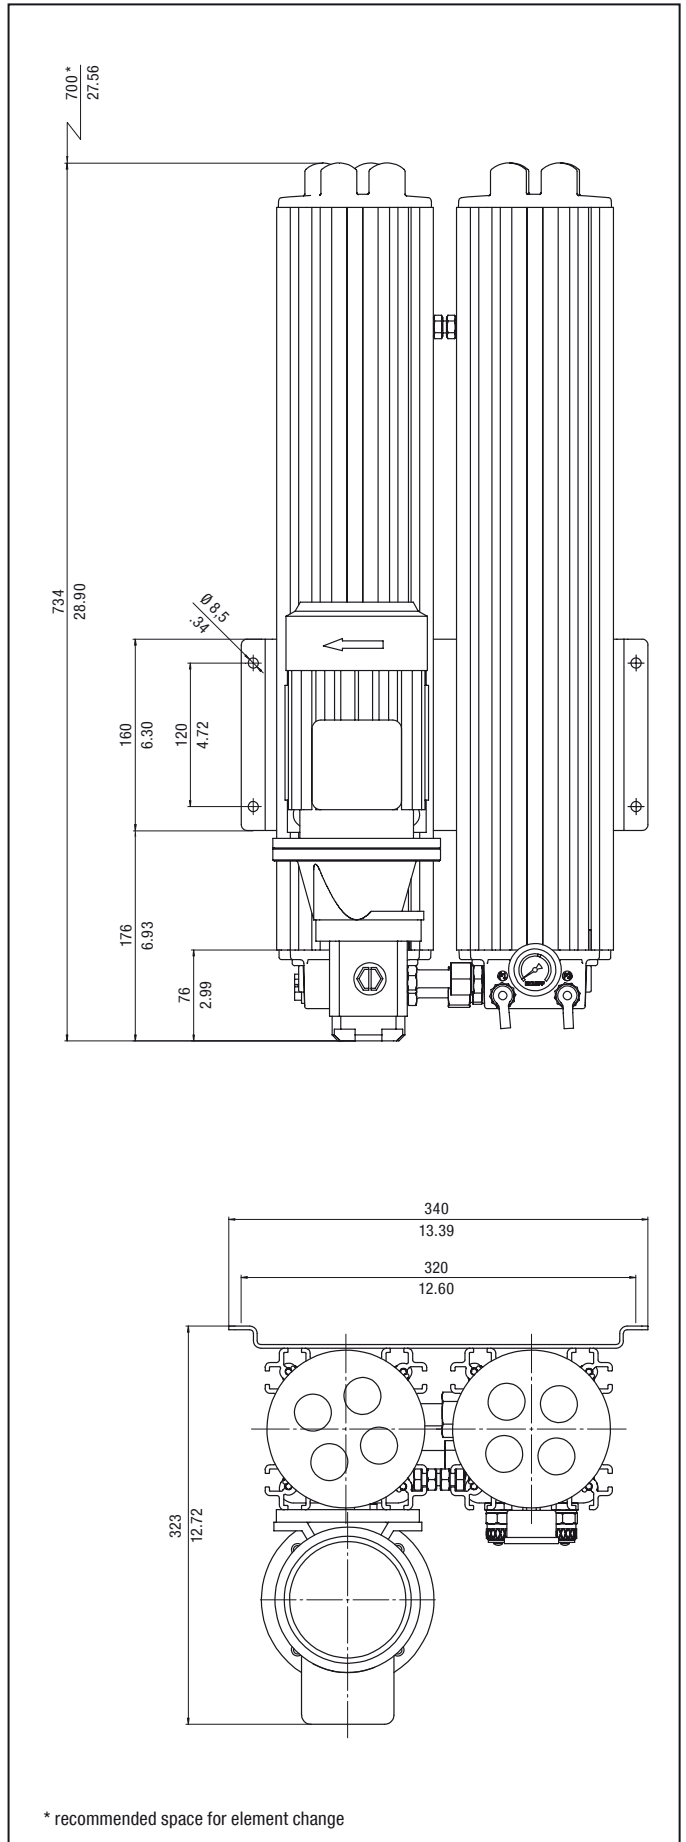

All dimensions in mm / in

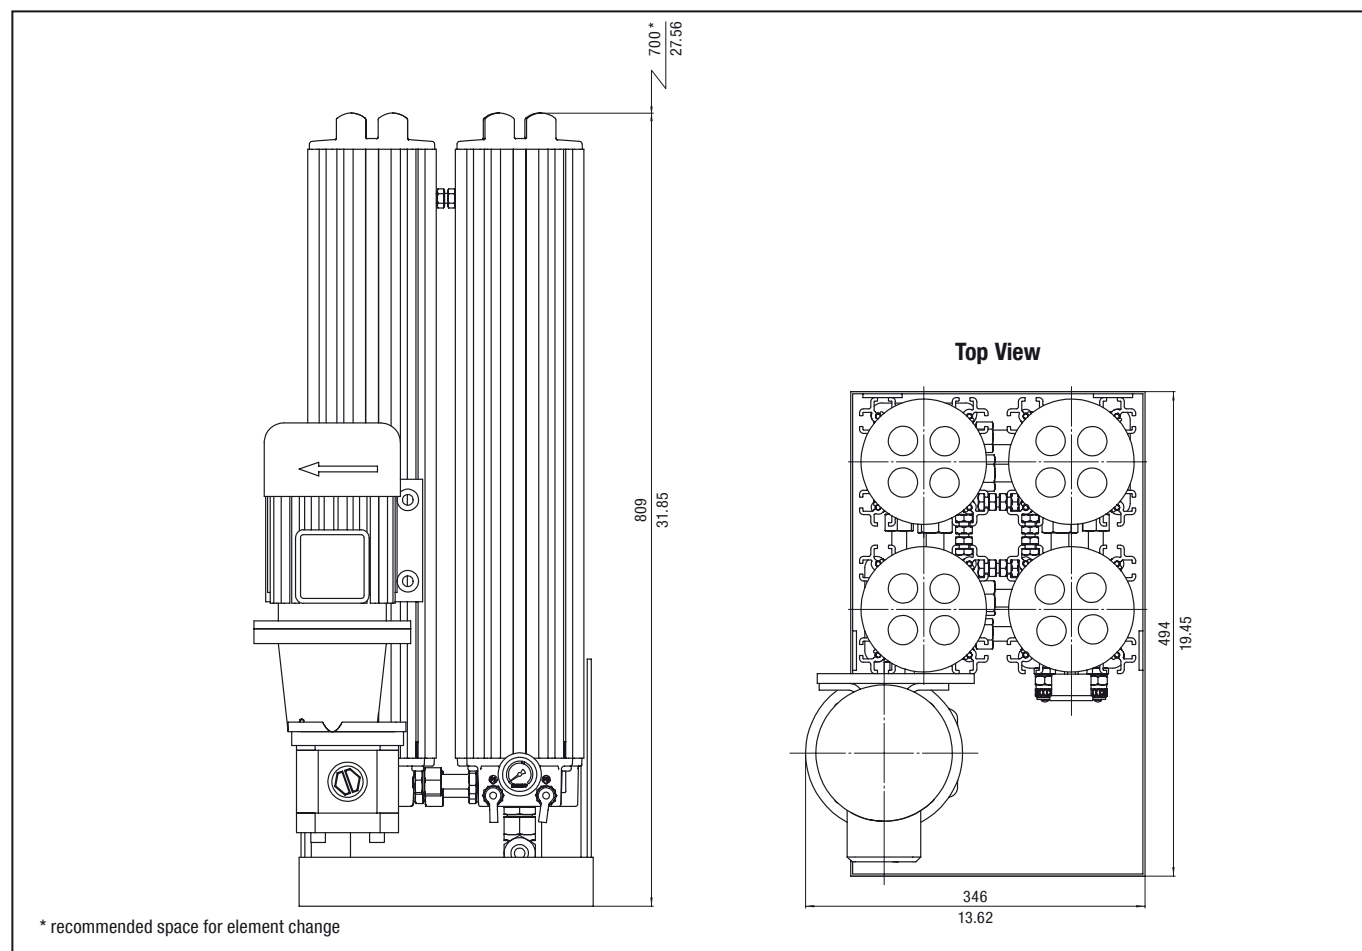Offline Filters ■ Type OLS
Dimensions OLS - 4B - 30 - H - B


All dimensions in mm / in

Technical Data

	OLS-1B-30-H-B	OLS-2B-30-H-B	OLS-4B-30-H-B
Number of Filter Housings	1	2	4
Nominal Flow	4,2 l/min 1.1 US GPM	8,4 l/min 2.22 US GPM	17 l/min 4.5 US GPM
Max. Differential Pressure	Max. 6,2 bar 90 PSI over the filter element without backpressure		
Max. Fluid Temperature	+80 °C +176 °F		
Max. Housing Pressure	20 bar 290 PSI		
Viscosity Range	20 ... 160 cSt 100 ... 750 SUS		
Connection Suction Side	G1/2	G1/2	G3/4
Connection Return Line Side	G1/2		EW 18L-3/4 in
Hose Diameter	1/2 in (inner diameter) flexible hose		3/4 in (inner diameter) flexible hose
Weight (Including Element)	18 kg 39.7 lbs	30 kg 66.1 lbs	61 kg 134.5 lbs
Max. System Volume	2700 l 713 gal	5400 l 1426 gal	10800 l 2853 gal
Dimensions	728 x 335 x 190 mm	734 x 340 x 323 mm	809 x 494 x 346 mm
HxWxD	28.66 x 13.19 x 7.48 in	28.90 x 13.39 x 12.72 in	31.85 x 19.45 x 13.62 in
Connection for Online Particle Counter	STAUFF Test (M16 x 2)		
Pump	Gear pump		
Motor	See page C156 for electric motor details		

Offline Filter Housings / Complete Filters ■ Type OLS

OLS - 1A - 30 - H - B - 0 - 01 - 0 - 0

1 2 3 4 5 6 7 8 9

1 Type

Offline Filter Unit **OLS**
(for industrial applications)

2 Housing Configuration

Single Length	Max. Reservoir Size	Quantity of Elements	Code
Single housing	1350 l / 356 gal	1x1	1A
Twin housing	2700 l / 713 gal	2x1	2A
Quadruple housing	5400 l / 1426 gal	4x1	4A

Double Length	Max. Reservoir Size	Quantity of Elements	Code
Single housing	2700 l / 713 gal	1x2	1B
Twin housing	5400 l / 1426 gal	2x2	2B
Quadruple housing	10800 l / 2853 gal	4x2	4B

3 Filter Element Length

300 mm / 11.81 in **30**

4 Filter Material and Micron Rating

Material	Micron rating µm	Code
Cellulose (standard)	0,5	H
Inorg. glass fibre	1	E01
Inorg. glass fibre	3	E03
Inorg. glass fibre	5	E05
Inorg. glass fibre	10	E10
Inorg. glass fibre	20	E20
Inorg. glass fibre and polymer (water absorption)	5	WA

5 Sealing Material

NBR (Buna-N®) (standard) **B**
FPM (Viton®) **V**

6 E-motor Options

Motor Type	Code
230/400 V AC, 50 Hz, three phases, 1360 r/min 255/460 V AC, 60 Hz, three phases, 1630 r/min (50 Hz and 60 Hz standard)	0
230 V AC, 50 Hz, single phase, 1360 r/min	A
24 V DC	B
110 V AC, 50 Hz, single phase	C
110 V AC, 60 Hz, single phase	D
230 V AC, 60 Hz, single phase, 1630 r/min	F

Note: Special motors on request.

7 Pump Options

50 Hz Motor	Standard in	Code
1,6 cc/rev.	OLS-1A	00
3,15 cc/rev.	OLS-2A/1B	10
6,1 cc/rev.	OLS-4A/2B	20
8,2 cc/rev.		30
11,3 cc/rev.	OLS-4B	40
0,8 cc/rev.		50

60 Hz motor	Standard in	Code
1,25 cc/rev.	OLS-1A	01
2,5 cc/rev.	OLS-2A/1B	11
5,0 cc/rev.	OLS-4A/2B	21
6,3 cc/rev.		31
10 cc/rev.	OLS-4B	41

8 Clogging Indicator

Visual clogging indicator **0**

9 Mounting Options

No options (standard) **0**
Motor / pump right side mounted **1**
Motor / pump left side mounted **2**
Motor / pump horizontal front **3**

Filter Elements ■ Type SRM

SRM - 30 - H - B - 1

1 2 3 4 5

1 Type

Filter Element Series **SRM**

2 Filter Element Length

300 mm / 11.81 in **30**

3 Filter Material and Micron Rating

Material	Micron rating µm	Code
Cellulose (standard)	0,5	H
Inorg. glass fibre	1	E01
Inorg. glass fibre	3	E03
Inorg. glass fibre	5	E05
Inorg. glass fibre	10	E10
Inorg. glass fibre	20	E20
Inorg. glass fibre and polymer (water absorption)	5	WA

4 Sealing Material

NBR (Buna-N®) (standard) **B**
FPM (Viton®) **V**

5 Quantity

One piece filter element **1**
Box with 15 pieces filter element **15**

Technical Data on Electric Motors used for OLS Filters (For air driven motors contact STAUFF)

E-motor	Standard Configuration	Description	Power in kW	Power in HP	Voltage 50 Hz	Amp 50 Hz	RPM 50 Hz	Voltage 60 Hz	Amp 60 Hz	RPM 60 Hz
C, D	OLS-1A OLS-2A OLS-1B	M63 B3/B5 4P 110V MULTIVOLT	0,18	0.24	110 V AC	3,30		110 V AC	2,70	
A, F	OLS-1A OLS-2A OLS-1B	M63 B3/B5 4P 230 MULTIVOLT	0,18	0.24	230 V AC	1,57		230 V AC	1,34	
0	OLS-1A OLS-2A OLS-1B	M63 B3/B5 4P 3PH MULTIVOLT	0,18	0.24	230/400 V AC	1,03 / 0,60		254/440 V AC	0,90 / 0,52	
0	OLS-2B OLS-4A	M63 B3/B5 4P 3PH MULTIVOLT	0,29	0.39	230/400 V AC	1,65 / 0,95	1460	254/440 V AC	1,47 / 0,85	1740
C, D	OLS-2B OLS-4A OLS-4B	M71 B3/B5 4P 110V MULTIVOLT	0,37	0.50	110 V AC	6,10		110 V AC	5,20	
A, F	OLS-2B OLS-4A OLS-4B	M71 B3/B5 4P 230V MULTIVOLT	0,37	0.50	230 V AC	3,00		230 V AC	2,65	
0	OLS-4B	M71 B3/B5 4P 3PH MULTIVOLT	0,37	0.50	230/400 V AC	1,90 / 1,10		254/440 V AC	1,60 / 0,93	

Water Absorbing Offline Filter ■ Type OLSW

Product Description

STAUFF Systems Units are characterized by their extremely efficient filter elements which are rated to 0,5 micron. Specially designed for industrial hydraulic installations the STAUFF Offline Filters are available in single or double length configurations. The Offline Filter Units can easily be mounted to new and existing hydraulic installations. By means of an integrated motor/pump unit and an Offline Filter, the oil is pumped from the reservoir through the filter unit and after filtering the oil is then returned to the tank.

Economical

The hydraulic market accepts that 70 % of mechanical failures are caused by contamination in the system. The STAUFF Water Absorbing Offline Filters attack this contamination at source and in addition to solid particles, these filters are also capable of removing large quantities of water from the oil. This prevents the catalytic reaction of water and solid particle contamination, resulting in extended useable oil life.

The application of STAUFF Filters results in lower component failure rates, less down time and less system maintenance.

Water Absorbing

STAUFF Water Absorbing Filters are Offline Units that use special water absorbing Spin-On Filter Elements as a pre-filter. The fluid is pumped through the pre-filter which removes most water and larger solid contamination, in the second stage the fluid passes through the STAUFF Micro Filter where final water removal takes place as well as solid removal down to 0,5 micron.

In recent years STAUFF Systems have developed a great deal of experience in cleaning and drying hydraulic and lubrication systems in the following markets:

- Steel industry
- Maritime industry
- Petrochemical industry
- Paper industry


Advantages

- Extremely clean oil due to the high filtration efficiency $\beta_2 > 2330$
- Prevention of channel forming by radial filtration direction
- Increased flow capacity
- Increased dirt-hold capacity
- Large water holding capacity
- Compact and easy-maintenance design
- Longer usage life for oil and components




Water Absorbing Offline Filter ▪ Type OLSW



Dimensions OLSW - 1A - 30

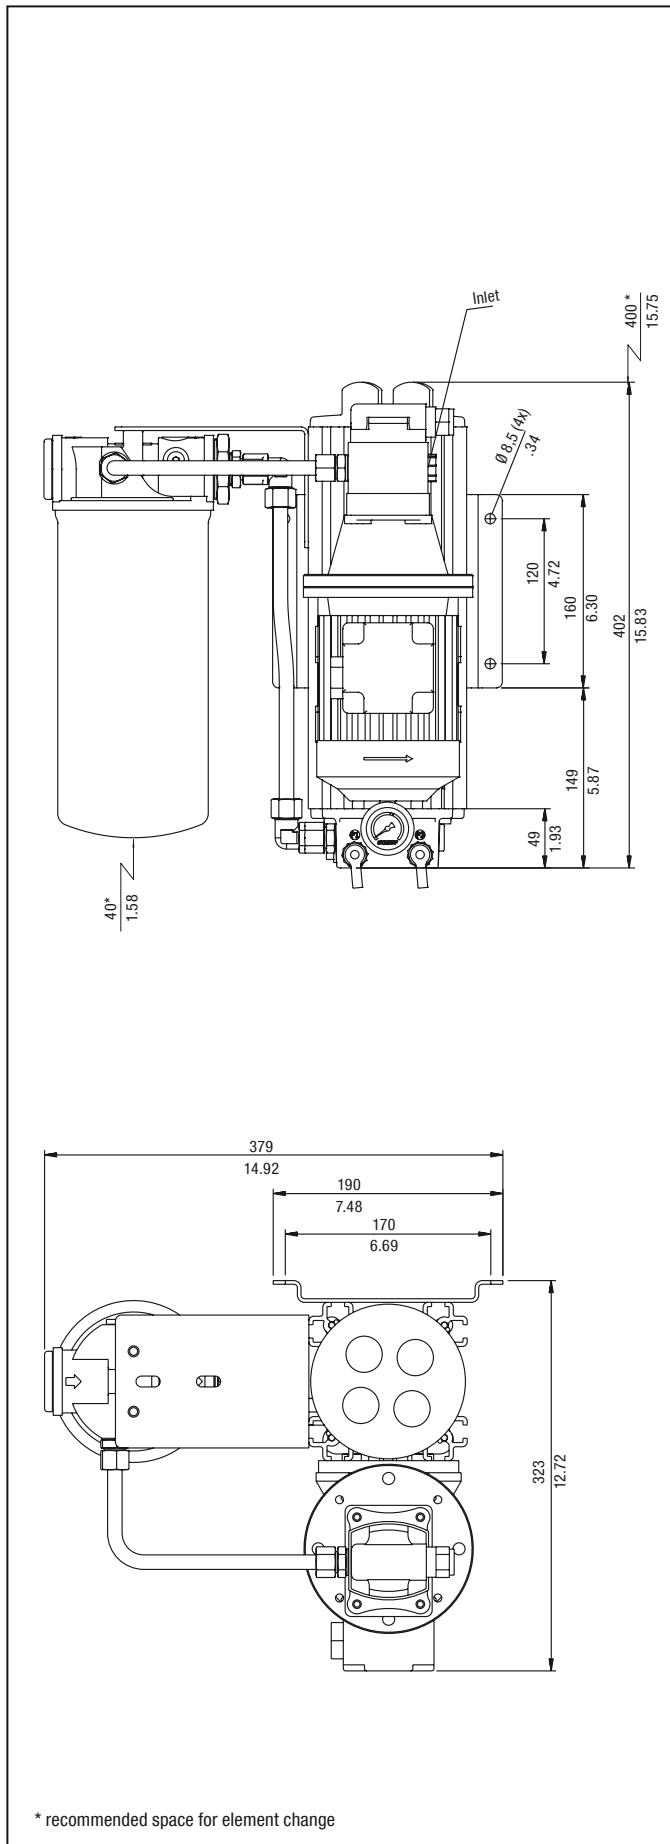

Dimensions OLSW - 1B - 30

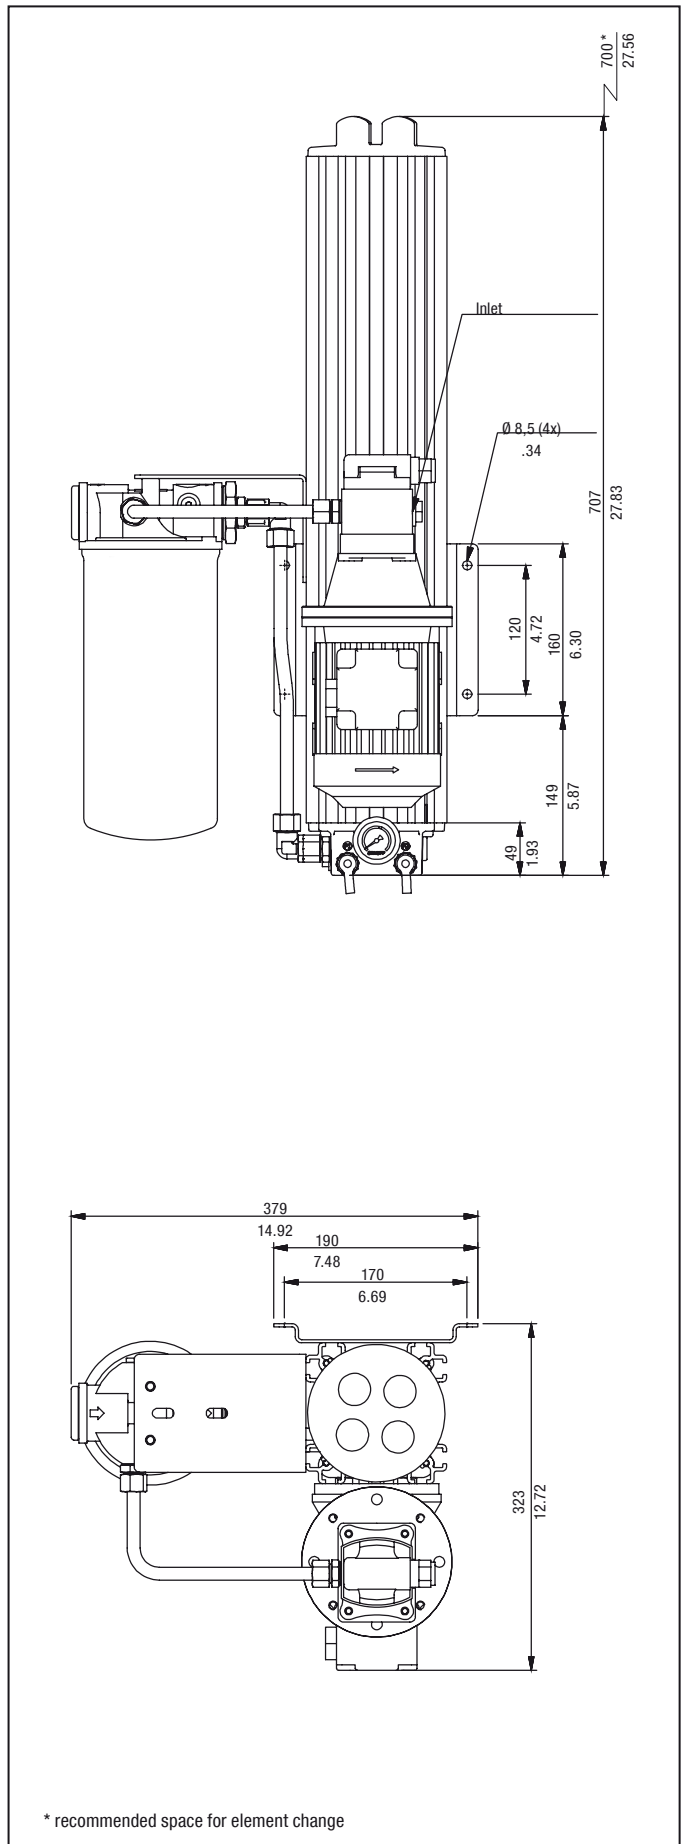


All dimensions in mm / in

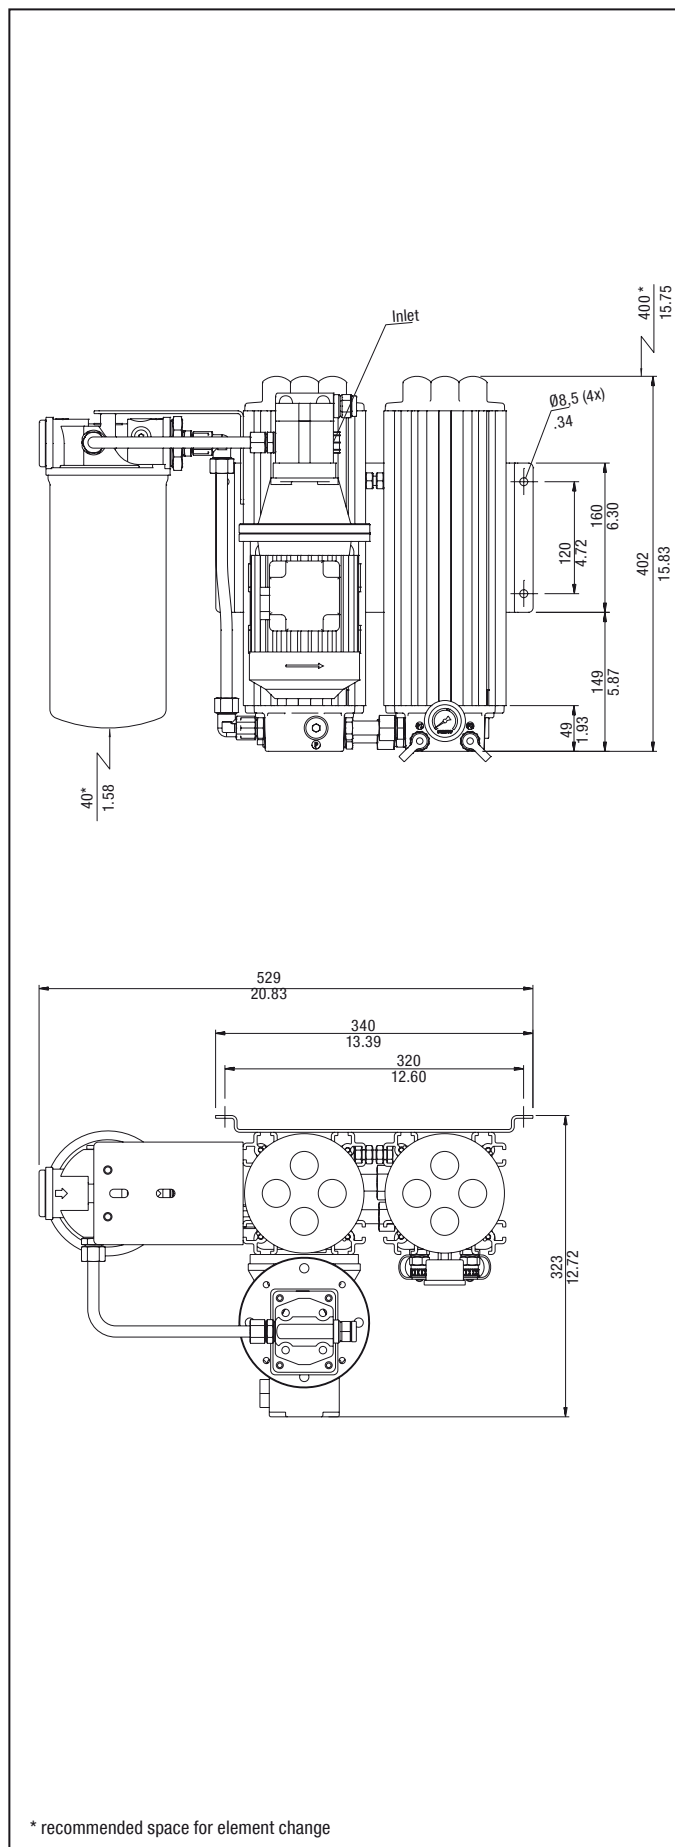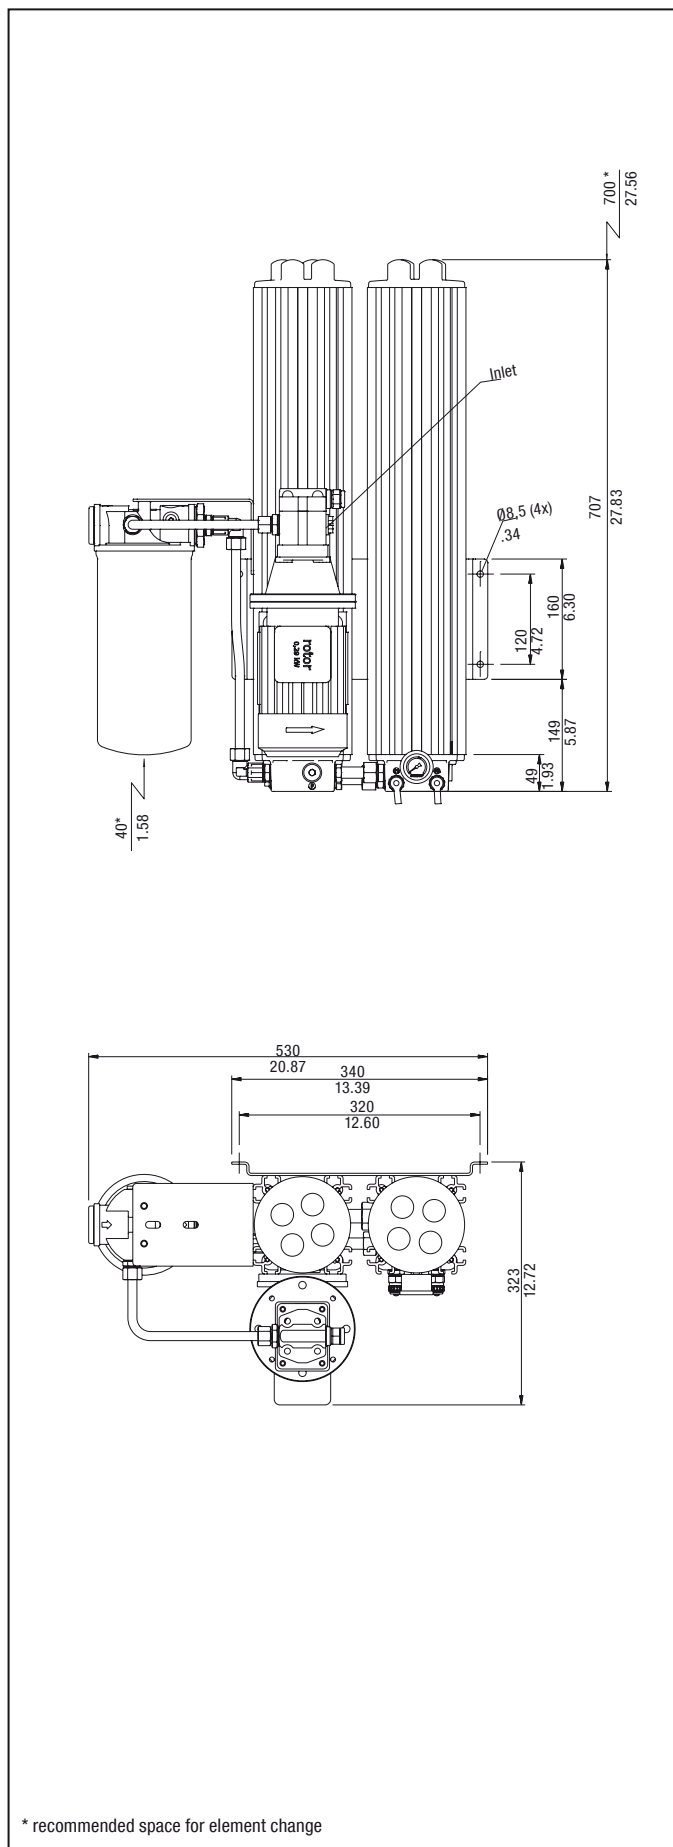Water Absorbing Offline Filter ■ Type OLSW
Dimensions OLSW - 2A - 30

Dimensions OLSW - 2B - 30


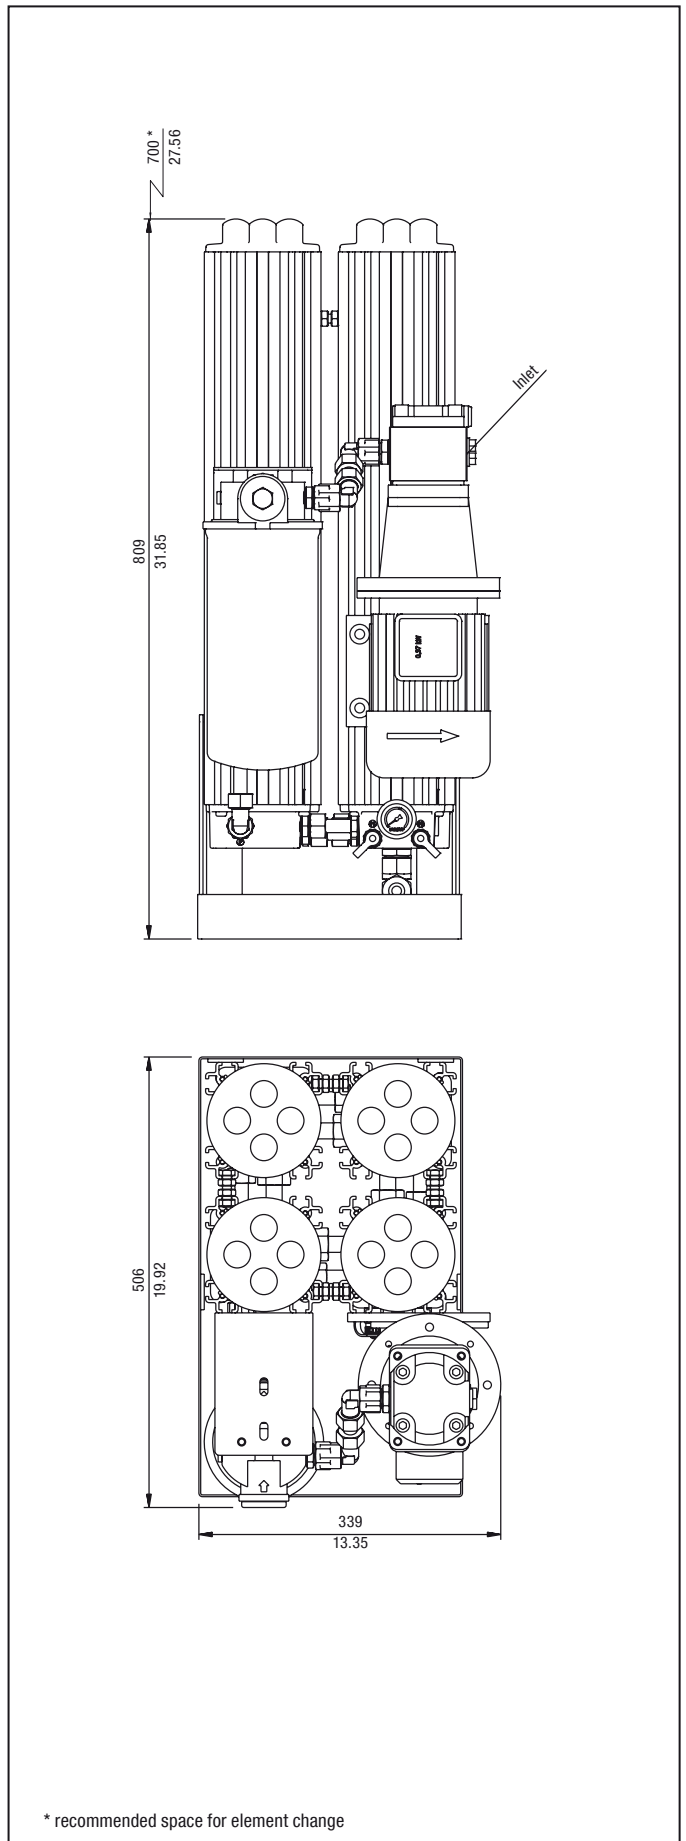
All dimensions in mm / in

Water Absorbing Offline Filter ▪ Type OLSW

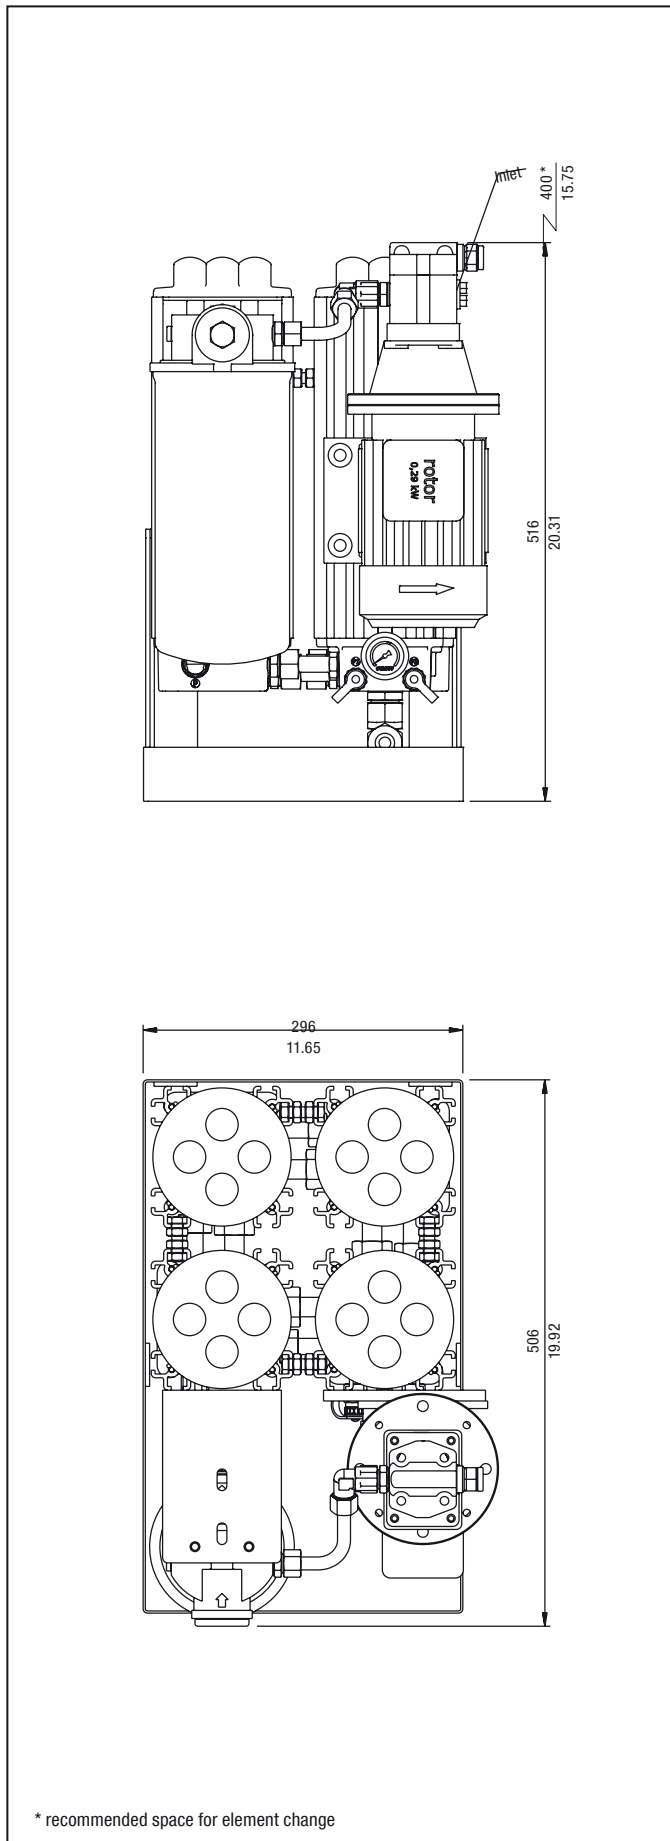Dimensions OLSW - 4A - 30





Dimensions OLSW - 4B - 30



All dimensions in mm / in

Water Absorbing Offline Filter ■ Type OLSW
Technical Data OLSW

Type Filter	OLSW - 1A - 30 - H - B	OLSW - 1B - 30 - H - B	OLSW - 2A - 30 - H - B	OLSW - 2B - 30 - H - B	OLSW - 4A - 30 - H - B	OLSW - 4B - 30 - H - B
Number of Filter Housings	1	1	2	2	4	4
Material Filter Housings	Anodized Aluminum					
Sealing Material	NBR (Buna-N®, standard)					
Nominal Flow	2,1 l/min .6 US GPM	4,2 l/min 1.1 US GPM	4,2 l/min 1.1 US GPM	8,4 l/min 2.2 US GPM	8,4 l/min 2.2 US GPM	16,8 l/min 4.4 US GPM
Bypass Opening Pressure (over the filter element without backpressure)	6,2 bar 90 PSI					
Number of Standard Filter Elements	1	2	2	4	4	8
Number of Pre-Filter Elements	1	1	1	1	1	1
Water Absorbing Capacity	690 ml 23 oz.	840 ml 28 oz.	840 ml 28 oz.	840 ml 28 oz.	840 ml 28 oz.	1740 ml 58 oz.
Max. Pressure Filter Housing	20 bar 290 PSI					
Max. Oil Temperature	+80 °C +176 °F					
Max. Viscosity	20 ... 160 cSt 100 ... 750 SUS					
Indicator Type	Visual clogging indicator					
Connection Pump Suction	G1/2 female					G3/4 female
Diameter Hose Suction Side	1/2 in					3/4 in
Filter Return Connection	G1/2 female				EW 18L - 3/4 in	
Diameter Hose Return Side	1/2 in				3/4 in or 1 in (with long hoses)	
Dimensions	402 x 379 x 323 mm	707 x 379 x 323 mm	402 x 529 x 323 mm	707 x 530 x 323 mm	518 x 296 x 506 mm	809 x 339 x 506 mm
H x B x L	15.83 x 14.92 x 12.72 in	27.84 x 14.29 x 12.72 in	15.83 x 20.83 x 12.72 in	27.83 x 20.87 x 12.72 in	20.39 x 11.65 x 19.92 in	31.85 x 13.35 x 19.92 in
Pump type	Gear pump					
Power Supply E-Motor	Various electrical power supplies possible					
Weight (including Element)	18 kg 39.7 lbs	22 kg 48.5 lbs	25 kg 55.1 lbs	34 kg 75.0 lbs	43 kg 94.8 lbs	65 kg 143.3 lbs
Max. System Volume	1350 l 356 gal	2700 l 713 gal	2700 l 713 gal	5400 l 1427 gal	5400 l 1427 gal	10,800 l 2853 gal
Standard Units for larger system volumes are also available						
Connection Oil-Analysis: P1 filter inlet side P2 filter outlet side	Test connector (M16 x 2) Red Test connector (M16 x 2) Red					

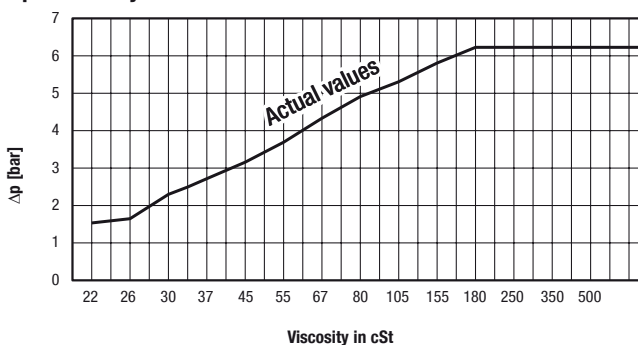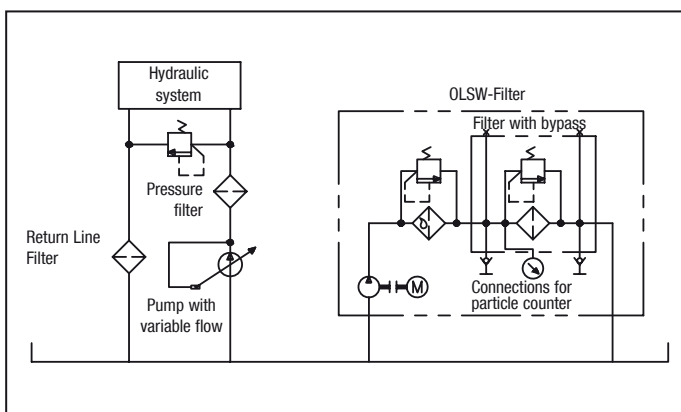
Water absorbing spin-on filter element
 Δp / Viscosity for OLSW-Filter

System Example
Schematic Offline Filtration incl. Water Absorption


Water Absorbing Offline Filter Housings / Complete Filters ■ Type OLSW

OLSW - 1A - 30 - H - B - 0 - 01 - 0 - 0 - A

1 2 3 4 5 6 7 8 9 10

1 Type

Offline Filter Unit incl. water absorption **OLSW**
(for industrial applications)

2 Housing Configuration

Length	Suitable for Reservoir Size	Quantity of Elements Standard	Pre-filter	Code
Single housing Single length	1350 l / 356 gal	1	1	1A
Single housing Double length	2700 l / 713 gal	2	1	1B
Double housing Single length	2700 l / 713 gal	2	1	2A
Double housing Double length	5400 l / 1427 gal	4	1	2B
Quadruple housing Single length	5400 l / 1427 gal	4	1	4A
Quadruple housing Double length	10800 l / 2853 gal	8	1	4B

3 Filter Element Length

300 mm / 11.81 in **30**

4 Filter Material and Micron Rating

Material	Micron rating µm	Code
Cellulose (standard)	0,5	H
Inorg. glass fibre	1	E01
Inorg. glass fibre	3	E03
Inorg. glass fibre	5	E05
Inorg. glass fibre	10	E10
Inorg. glass fibre	20	E20
Inorg. glass fibre and polymer (water absorption)	5	WA

5 Sealing Material

NBR (Buna-N®) (standard) **B**
FPM (Viton®) **V**

6 E-motor Options

Motor Type	Code
230/400 V AC, 50 Hz, three phases, 1360 r/min 255/460 V AC, 60 Hz, three phases, 1630 r/min (50 Hz and 60 Hz standard)	0
230 V AC, 50 Hz, single phase, 1360 r/min	A
24 V DC	B
110 V AC, 50 Hz, single phase	C
110 V AC, 60 Hz, single phase	D

Note: Other motors on request, technical data see page C156.

7 Pump Options

50 Hz Motor	Standard in	Code
1,6 cc/rev.	OLSW-1A	00
3,15 cc/rev.	OLSW-1B/2A	10
6,1 cc/rev.	OLSW-2B/4A	20
11,3 cc/rev.	OLSW-4B	40

60 Hz Motor	Standard in	Code
1,25 cc/rev.	OLSW-1A	01
2,5 cc/rev.	OLSW-1B/2A	11
5,0 cc/rev.	OLSW-2B/4A	21
10 cc/rev.	OLSW-4B	41

8 Clogging Indicator

Visual clogging indicator **0**

9 Mounting Options

No options (standard) **0**

10 Pre-Filter Elements

Water absorption element	
SF6721-W (10 micron water absorbing, capacity 540 ml water)	A
Pre-filter elements (particles)	
without pre-filter element	0
SF6702-MG (inorganic glass fibre, 1 micron)	B
SF6704-MG (inorganic glass fibre, 3 micron)	C
SF6707-MG (inorganic glass fibre, 6 micron)	D
SF6731-MG (inorganic glass fibre, 12 micron)	E
SF6726-MG (inorganic glass fibre, 25 micron)	F
SF6721 (filter paper, 10 micron)	G
SF6711 (filter paper, 25 micron)	H
SF6791 (wire mesh, 125 micron)	J

Filter Elements ■ Type SRM

SRM - 30 - H - B - 1

1 2 3 4 5

1 Type

Filter Element Series **SRM**

2 Filter Element Length

300 mm / 11.81 in **30**

3 Filter Material and Micron Rating

Material	Micron rating µm	Code
Cellulose (standard)	0,5	H
Inorg. glass fibre	1	E01
Inorg. glass fibre	3	E03
Inorg. glass fibre	5	E05
Inorg. glass fibre	10	E10
Inorg. glass fibre	20	E20
Inorg. glass fibre and polymer (water absorption)	5	WA

4 Sealing Material

NBR (Buna-N®) (standard) **B**
FPM (Viton®) **V**

5 Quantity

One piece filter element **1**
Box with 15 pieces filter element **15**

Pre-Filter Elements ■ Type SF67

SF6721 - W

1

1 Pre-Filter Elements

SF6721-W	Spin-on filter element, water absorbing, 10 micron
SF6702-MG	Spin-on filter element, inorganic glass fibre, 1 micron
SF6704-MG	Spin-on filter element, inorganic glass fibre, 3 micron
SF6707-MG	Spin-on filter element, inorganic glass fibre, 6 micron
SF6731-MG	Spin-on filter element, inorganic glass fibre, 12 micron
SF6726-MG	Spin-on filter element, inorganic glass fibre, 25 micron
SF6721	Spin-on filter element, filter paper, 10 micron
SF6711	Spin-on filter element, filter paper, 25 micron
SF6791	Spin-on filter element, wire mesh, 125 micron

Heated Offline Filters ■ Type OLSH

Product Description

STAUFF System Units are characterized by their pre-heating unit and extremely efficient filter elements with a fineness of 0,5 micron.

Specially designed for industrial hydraulic installations, the STAUFF Offline Filters are available in single or multiple housing configurations. The Offline Filter Units can easily be mounted to new and existing hydraulic installations.

By means of an integrated motor/pump unit and an Offline Filter, the oil is pumped from the reservoir through the filter unit and after filtering the oil is then returned to the tank.

Economical

The hydraulic market accepts that 70 % of the mechanical failures are caused by contamination in the system. The STAUFF Offline Filters attack this contamination at the source. In addition to solid particles, these filters are also capable of removing water from the oil. This prevents the catalytic reaction of water and solid particle contamination, resulting in extended usable life.

The application of STAUFF Filters results in lower component failure rates, less down time and less system maintenance.

In recent years STAUFF Systems have developed a great deal of experience in cleaning and drying hydraulic and lubrication systems in the following markets:

- Steel industry
- Maritime industry
- Petrochemical industry
- Paper industry

Heated Offline Filters

The electric pre-heating ensures that the cold and/or high viscosity fluid is brought to a temperature with a suitable filtration viscosity. Offline Filters with pre-heating can be applied to new or existing installations. The integrated pump-motor combination draws fluid from the reservoir, pumps it through a heating element, filters the fluid and returns it to the reservoir.


Advantages

- Extremely clean oil due to the high filtration efficiency $\beta_{0,5} \geq 200$, $\beta_2 \geq 2330$
- Prevention of channel forming by radial filtration direction
- Increased flow capacity
- Increased dirt holding capacity
- Large water holding capacity
- Compact and easy maintenance design
- Longer usage life for oil and components




Heated Offline Filters ▪ Type OLSH

Dimensions OLSH - 1A

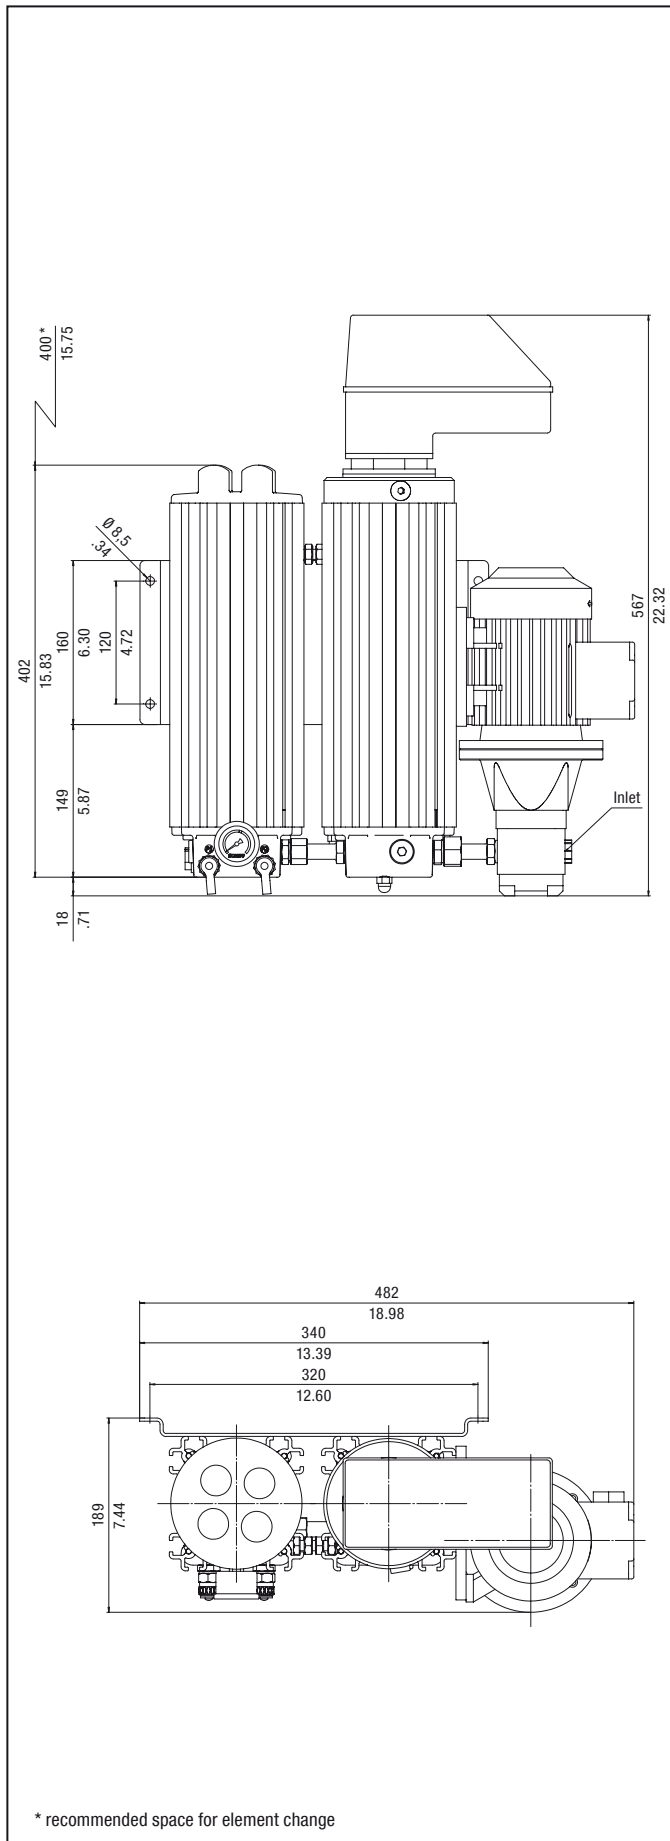

Dimensions OLSH - 1B

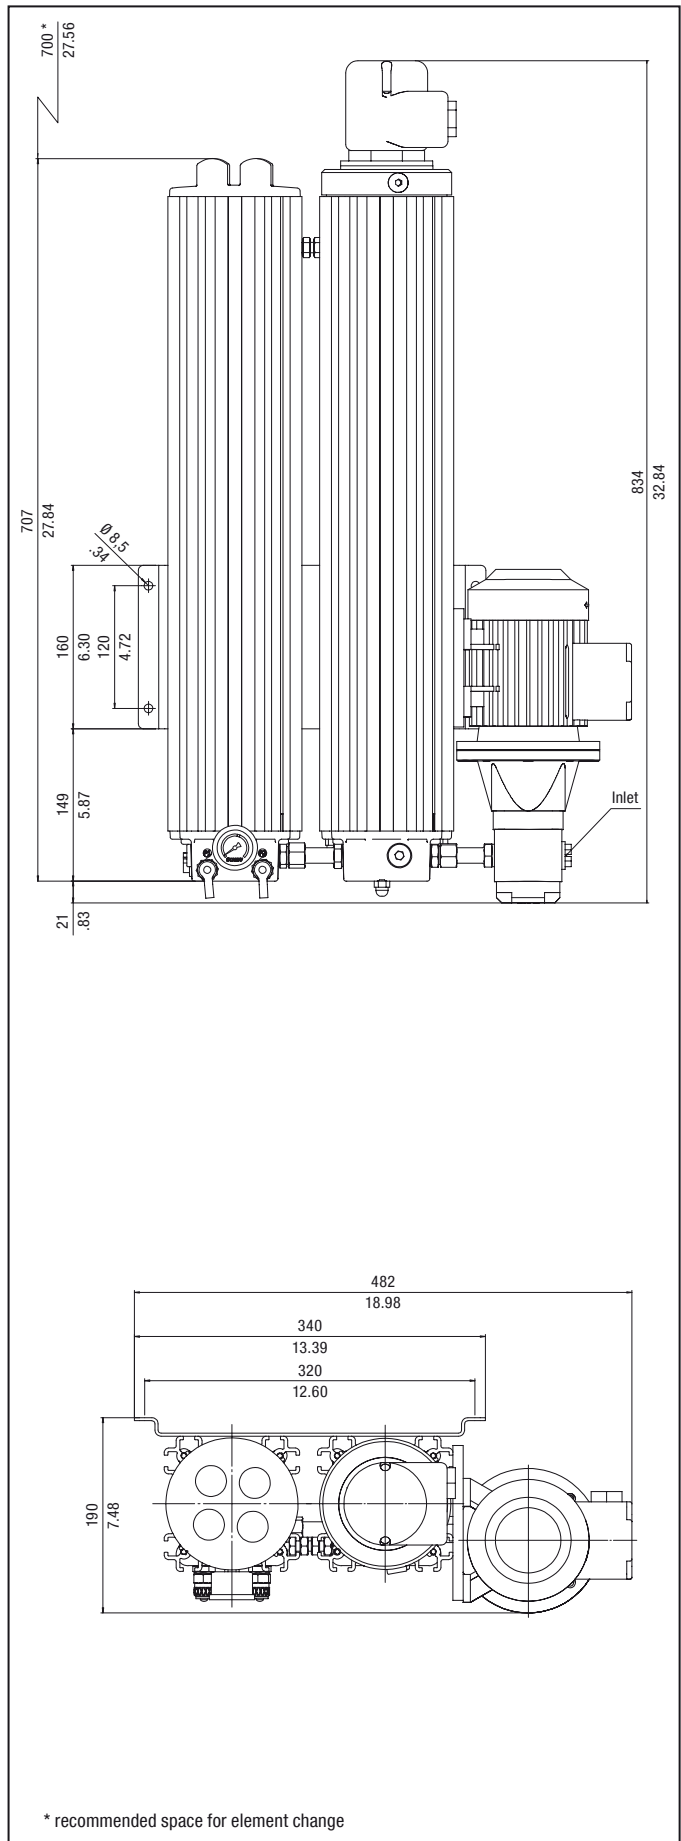


All dimensions in mm / in

Heated Offline Filters ■ Type OLSH


Technical Data Heated Offline Filters

	OLSH - 1A - 30	OLSH - 1B - 30
Number of Filter Housings	1	1
Nominal Flow Rate	2,1 l/min .6 US GPM	4,2 l/min 1.2 US GPM
Max. Differential Pressure	Max. 6,2 290 PSI over the filter element without back pressure	
Max. Fluid Temperature	+80 °C +176 °F	
Max. Housing Pressure	20 bar 290 PSI	
Heater Capacity	2 kW	
Connection Suction Side	G3/8	
Connection Return Side	G1/2	
Hose Diameter	1/2 in ... 3/4 in (inner diameter) flexible hose	
Weight (including Element)	24 kg 44 lbs	28 kg 62 lbs
Max. System Volume	1350 l 356 gal	2700 l 713 gal
Dimensions	567 x 482 x 189 mm	834 x 482 x 190 mm
H x W x D	22.32 x 18.98 x 7.44 in	32.84 x 18.98 x 7.48 in
Connection for On-Line Particle Counter	STAUFF Test (M16 x 2)	STAUFF Test (M16 x 2)
Pump	Gear Pump	
Motor	See page C164 for electric motor details	

STAUFF Heating Efficiency Curve

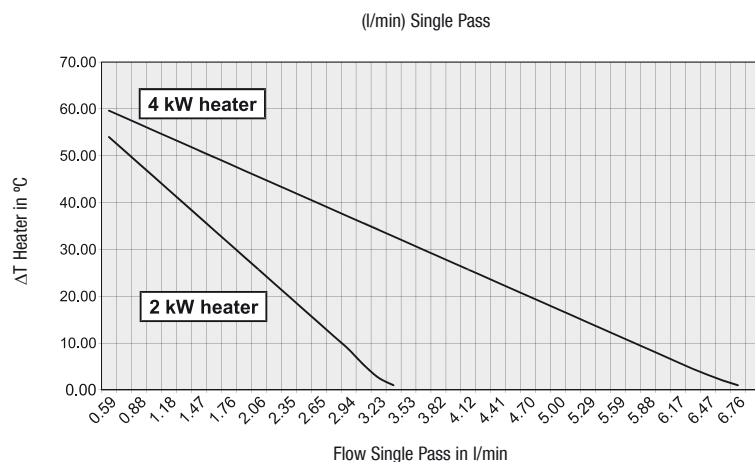

Heated Unit Hydraulic Schematic

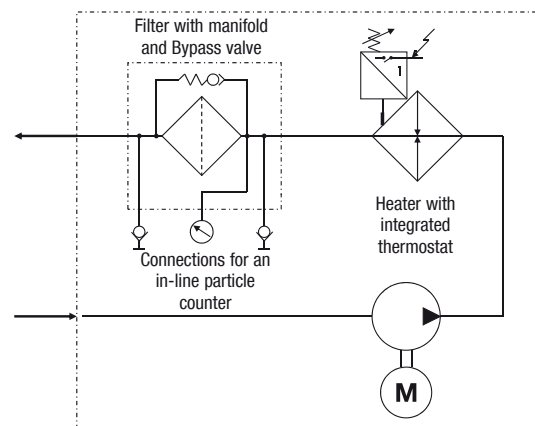

Heated Offline Filter Housings / Complete Filters ■ Type OLSH

OLSH - 1A - 30 - H - B - 0 - 00 - 0 - 0

1 2 3 4 5 6 7 8 9

1 Type

Heated Offline Filter Unit **OLSH**
(for industrial applications)

2 Housing Configuration

Length	Suitable for Reservoir Size	Quantity of Elements	Code
Single housing Single length	1350 l / 356 gal	1 pcs	1A
Single housing Double length	2700 l / 713 gal	2 pcs	1B

3 Filter Element Length

300 mm / 11.81 in **30**

4 Filter Material

Material	Micron Rating µm	Code
Cellulose (standard)	0,5	H
Inorg. glass fibre	1	E01
Inorg. glass fibre	3	E03
Inorg. glass fibre	5	E05
Inorg. glass fibre	10	E10
Inorg. glass fibre	20	E20
Inorg. glass fibre and polymer (water absorption)	5	WA

5 Sealing Material

NBR (Buna-N®) (standard) **B**
FPM (Viton®) **V**

6 E-Motor Options

Type	Code
230/400 V AC, 50 Hz, three phases, 1360 r/min 255/460 V AC, 60 Hz, three phases, 1630 r/min (50 Hz and 60 Hz standard)	0
230 V AC, 50 Hz, single phase	A
230/400 V AC, 50 Hz, three phases, IP65	E
230 V AC, 60 Hz, single phase, 1630 r/min	F

Note: Other motors on request, technical data see page C156.

7 Pump Options

Standard for 50 Hz Motor	Standard for	Code
1,6 cc/rev.	OLSH-1A	00
3,15 cc/rev.	OLSH-1B	10
1.0 cc / rev.		60

60 Hz Motor	Standard in	Code
1,25 cc / rev.	OLSH-1A	01
2,5 cc / rev.	OLSH-1B	11

8 Clogging Indicator

Visual clogging indicator **0**
With water sensor **1**

9 Mounting Options

No options (standard) **0**

Filter Elements ■ Type SRM

SRM - 30 - H - B - 1

1 2 3 4 5

1 Type

Filter Element Series **SRM**

2 Filter Element Length

300 mm / 11.81 in **30**

3 Filter Material and Micron Rating

Material	Micron rating µm	Code
Cellulose (standard)	0,5	H
Inorg. glass fibre	1	E01
Inorg. glass fibre	3	E03
Inorg. glass fibre	5	E05
Inorg. glass fibre	10	E10
Inorg. glass fibre	20	E20
Inorg. glass fibre and polymer (water absorption)	5	WA

4 Sealing Material

NBR (Buna-N®) (standard) **B**
FPM (Viton®) **V**

5 Quantity

One piece filter element **1**
Box with 15 pieces filter element **15**

Bypass Filters ■ Type BPS
Product Description

STAUFF BPS Bypass Filter can be used for OEM first fit applications as well as for retro-fitting. The filtration is done in a bypass configuration from the main hydraulic system. The STAUFF BPS Filter Systems are available with one filter housing (BPS-1A, maximum flow 2,1 l/min / .6 US GPM) or with two filter housings (BPS-2A, maximum flow 4,2 l/min / 1.1 US GPM) at a viscosity between 20 ... 160 cSt / 100 ... 750 SUS.

The STAUFF Filter Systems are especially designed for mobile applications in hydraulic and/or transmission systems.

In the absence of a pumped system, the oil is drawn from the main system by means of a specially designed and integrated flow valve. The amount of oil extracted at any one time is insignificant therefore ensuring that it will not affect the working of the main system.

Most commonly used biodegradable oils in the mobile sector are suitable for filtration with STAUFF Filter Elements.

STAUFF Systems have been applied on a wide range of mobile hydraulic machinery, cleaning fluids to levels not previously possible with conventional filtration methods, resulting in dramatic increases in component life.

Successful applications include:

- Excavators
- Wheel loaders
- Forestry machines
- Asphaltting machines
- Cement mixers
- Aircraft ground support machinery
- Agricultural machines




BPS - 1A - 30 - H - B



BPS - 2A - 30 - H - B


Bypass Filters ■ Type BPS

Dimensions BPS - 1A - 30 - H - B

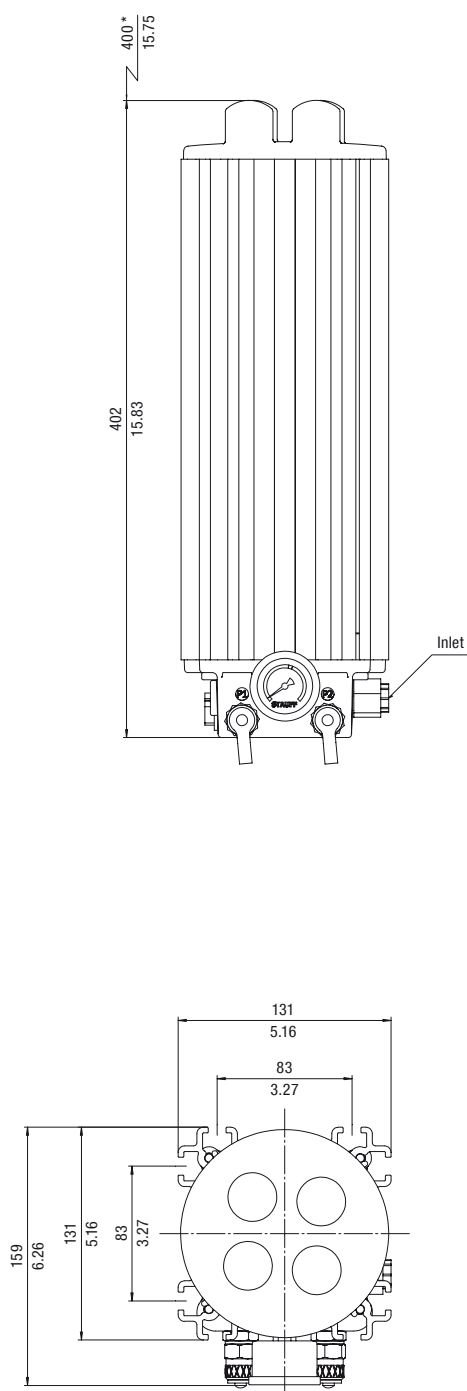

* recommended space for element change

Dimensions BPS - 2A - 30 - H - B

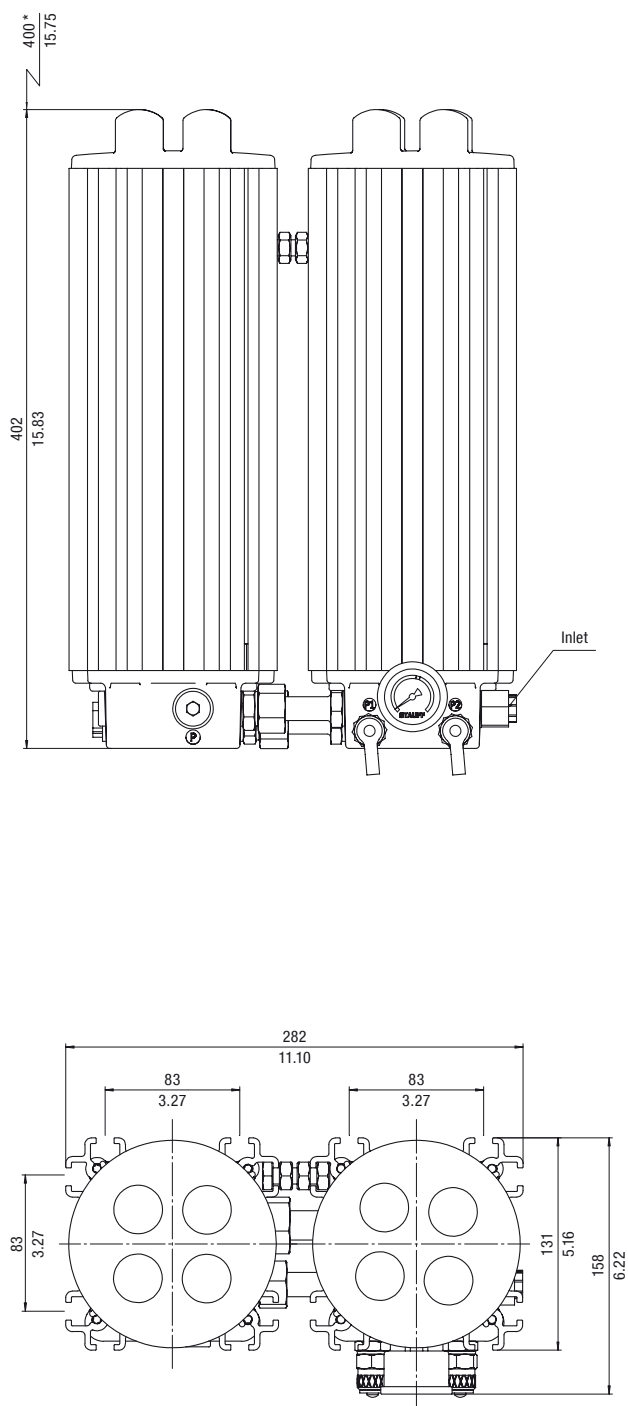

* recommended space for element change

All dimensions in mm / in

Bypass Filters ■ Type BPS
Technical Data BPS

	BPS - 1A - 30 - H - B	BPS - 2A - 30 - H - B
Number of Filter Housings	1	2
Nominal Flow	2,1 l/min .6 US GPM	4,2 l/min 1.1 US GPM
Max. Differential Pressure	Max. 6,2 90 PSI over the filter element without back pressure	
Max. Fluid Temperature	+80 °C +176 °F	
Max. Housing Pressure	20 bar 290 PSI	
Range of Viscosity	20 ... 160 cSt 100 ... 750 SUS	
Connection Pressure Side	G1/4	
Connection Return Line Side	G1/2	
Hose Diameter	3/8 ... 1/2 in (inner diameter) flexible hose	
Weight	6 kg 13.2 lbs	13 kg 28.7 lbs
Max. Volume of Tank	750 l 200 gal	1500 l 400 gal
Dimensions	402 x 131 x 159 mm	402 x 282 x 158 mm
H x W x D	15.83 x 5.16 x 6.26 in	15.83 x 11.10 x 6.22 in
Connection for On-Line Particle Counter	STAUFF Test (M16 x 2)	
Pressure Range	12 ... 420 bar 180 ... 6200 PSI	

Bypass Filter Housings / Complete Filters ■ Type BPS

BPS - 1A - 30 - H - B - 0 - 0 - 0																																			
1	2	3	4	5	6	7	8																												
1 Type Bypass Filter Unit (for mobile applications) BPS				4 Filter Material and Micron Rating				6 Clogging Indicator Visual clogging indicator 0																											
2 Housing Configuration				<table><tr><th>Material</th><th>Micron Rating µm</th><th>Code</th></tr><tr><td>Cellulose (standard)</td><td>0,5</td><td>H</td></tr><tr><td>Inorg. glass fibre</td><td>1</td><td>E01</td></tr><tr><td>Inorg. glass fibre</td><td>3</td><td>E03</td></tr><tr><td>Inorg. glass fibre</td><td>5</td><td>E05</td></tr><tr><td>Inorg. glass fibre</td><td>10</td><td>E10</td></tr><tr><td>Inorg. glass fibre</td><td>20</td><td>E20</td></tr><tr><td>Inorg. glass fibre and polymer (water absorption)</td><td>5</td><td>WA</td></tr></table>				Material	Micron Rating µm	Code	Cellulose (standard)	0,5	H	Inorg. glass fibre	1	E01	Inorg. glass fibre	3	E03	Inorg. glass fibre	5	E05	Inorg. glass fibre	10	E10	Inorg. glass fibre	20	E20	Inorg. glass fibre and polymer (water absorption)	5	WA	7 Valve Options With flow control valve (standard) 0 Without flow control valve 1			
Material	Micron Rating µm	Code																																	
Cellulose (standard)	0,5	H																																	
Inorg. glass fibre	1	E01																																	
Inorg. glass fibre	3	E03																																	
Inorg. glass fibre	5	E05																																	
Inorg. glass fibre	10	E10																																	
Inorg. glass fibre	20	E20																																	
Inorg. glass fibre and polymer (water absorption)	5	WA																																	
3 Filter Element Length 300 mm / 11.81 in 30				5 Sealing Material NBR (Buna-N®) (standard) B FPM (Viton®) V				8 Mounting Options No bracket (standard) 0 With standard foot / bulk head mounting bracket 1 With "bulk head mounting only" bracket 2 With standard 'OLS' wall mounting bracket 3																											
								Note: For details see page C170																											

Filter Elements ■ Type SRM

1

2

3

4

5

1

Type

Filter Element Series

SRM

2

Filter Element Length

300 mm / 11.81 in

30

3

Filter Material and Micron Rating

Material	Micron Rating µm	Code
Cellulose (standard)	0,5	H
Inorg. glass fibre	1	E01
Inorg. glass fibre	3	E03
Inorg. glass fibre	5	E05
Inorg. glass fibre	10	E10
Inorg. glass fibre	20	E20
Inorg. glass fibre and polymer (water absorption)	5	WA

4

Sealing Material

NBR (Buna-N®) (standard)

FPM (Viton®)

B

V

5

Quantity

One piece filter element


Box with 15 pieces filter element

1

15


Bypass Filters - Type BPS

With Standard Foot / Bulk Head Mounting Bracket (Code 1)

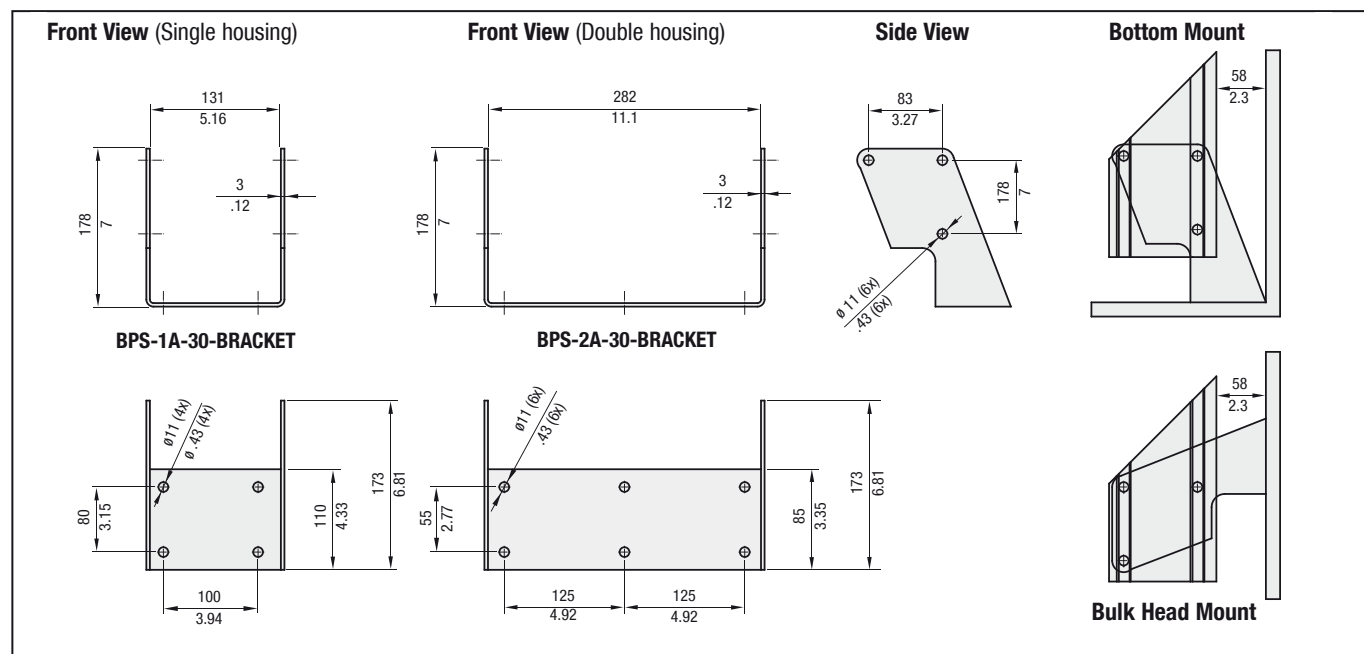


All dimensions in mm / in

With "Bulk Head Mounting Only" Bracket (Code 2)

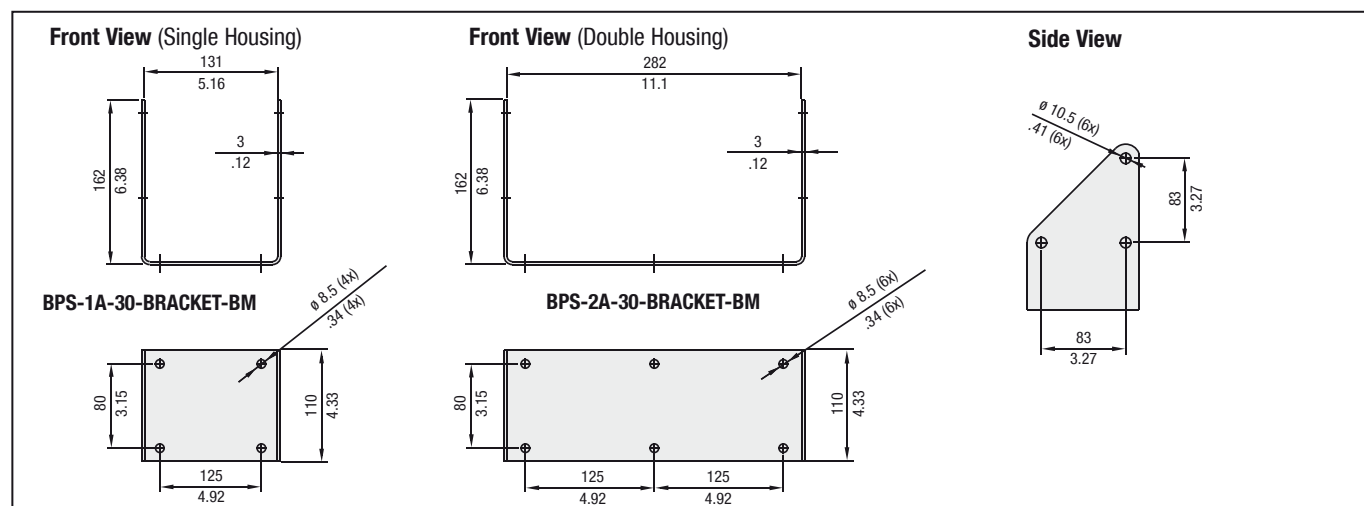

All dimensions in mm / in


Standard "OLS" Wall Mounting Bracket (Code 3)

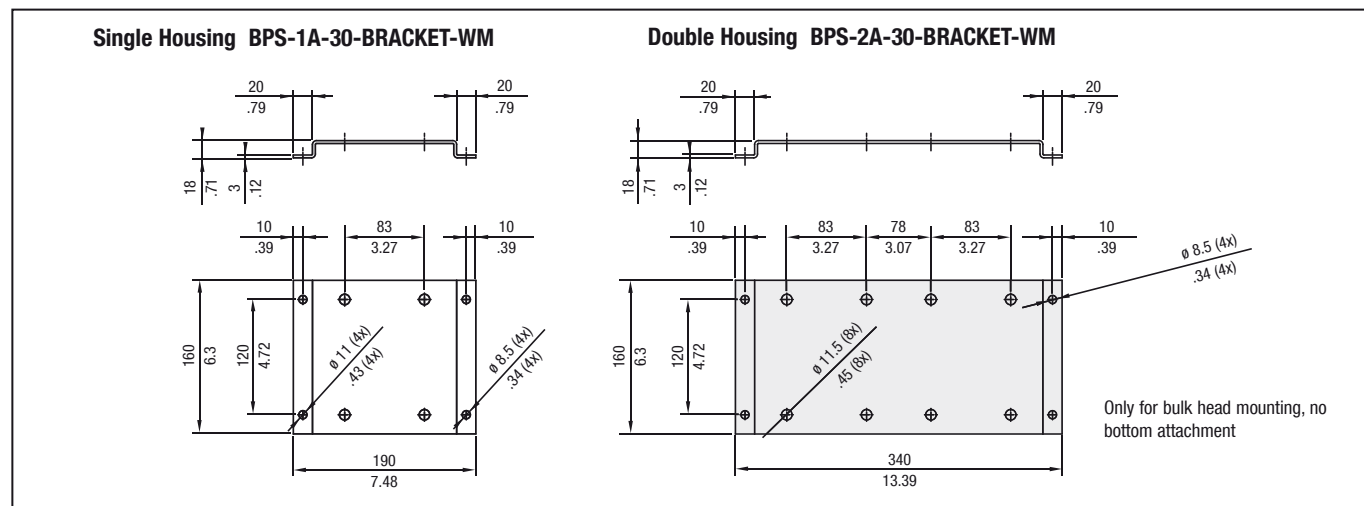


All dimensions in mm / in

Bypass and Offline Filters ■ Type OLS / BPS

Offline Filter OLS Hydraulic Symbol

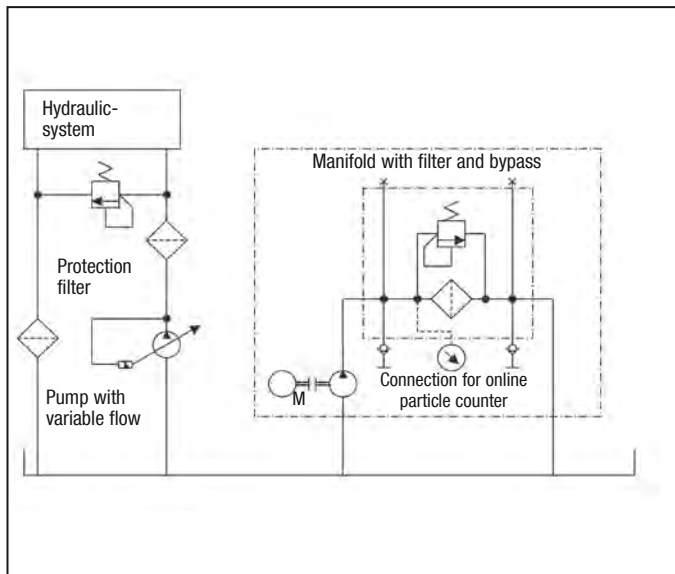


Bypass Filter BPS Hydraulic Symbol

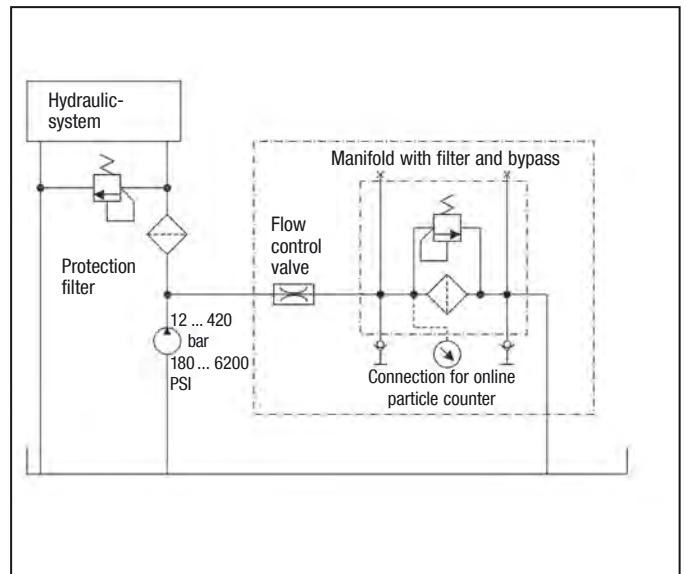


Filter Element SRM-30HB Δp / viscosity - graph


(at a flow of 2,1 l/min / .6 US GPM per element)

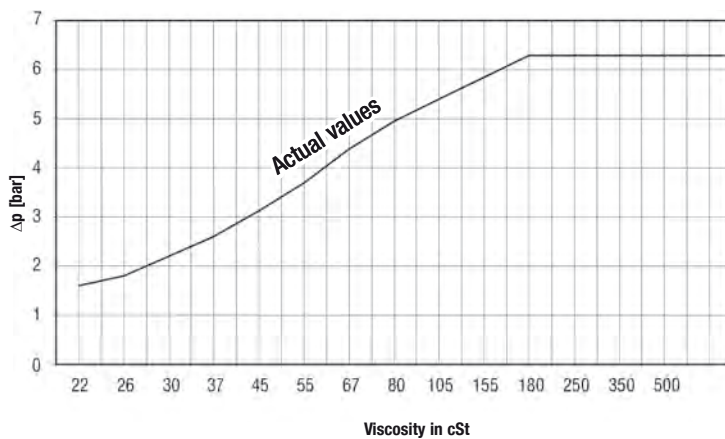


Flow Characteristics Offline Filter OLS with Filter Element SRM-30HB (at maximum viscosity)

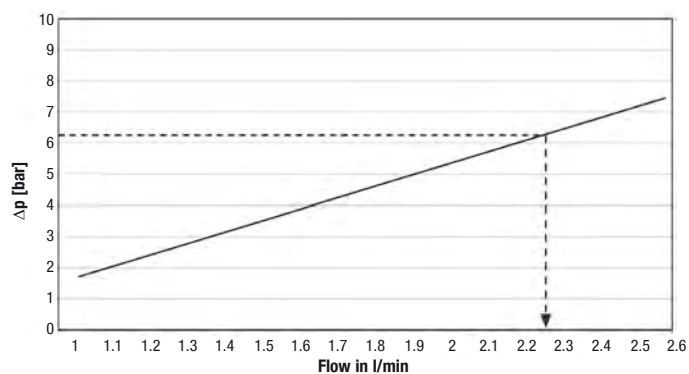

Flow Characteristics Bypass Filter BPS with Filter Element SRM-30HB (at maximum viscosity)

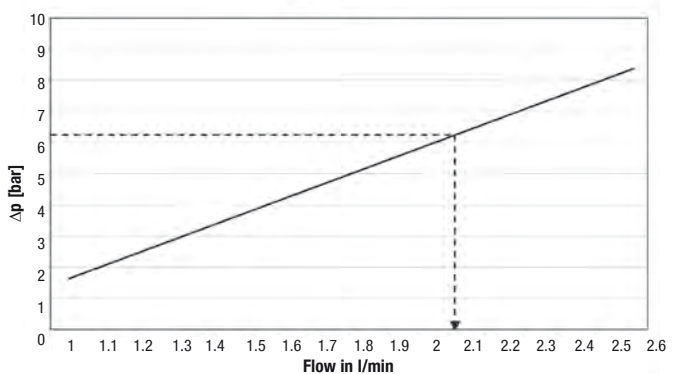

Bypass Lube-Oil Filter ■ Type BPLS

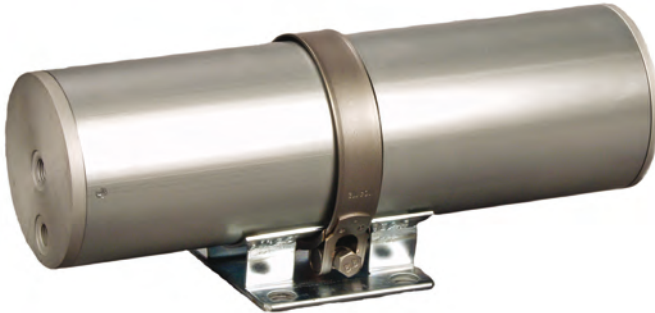


Product Description

Maintenance is essential for the efficient functioning of engine equipment. However, it is always a critical decision between the quality of the maintenance and the costs involved. Optimal maintenance efficiency combines maximum achievement of the maintenance goal (protection and prolonged usage life of the object) with minimal use of means (costs). The STAUFF Bypass Filter is unique in that it not only achieves the goal, but saves on costs.

The STAUFF Bypass Filter keeps the oil clean, resulting in significant technical, environmental and financial benefits thanks to reduced wear and tear on equipment and machines and prolonged oil life time.

STAUFF Systems BPLS Bypass Filters are used as an additional micro filter connected in bypass to the conventional main stream filters on engines (and automatic transmissions.) Most contamination is much smaller than 15 micron in size, but full flow filters generally do not filter below this level. This results in a lot of harmful contamination passing through these filters and remaining in the system. STAUFF Systems Bypass Filters are capable of filtering down as low as 0,5 micron without detriment to the lubrication circuit. (see schematic)

Whatever the application, the benefits of the STAUFF Systems Bypass Filters are all based on maintaining a higher quality and cleanliness level of the oil and thereby avoiding the multiple problems that can be caused by fluid contamination.

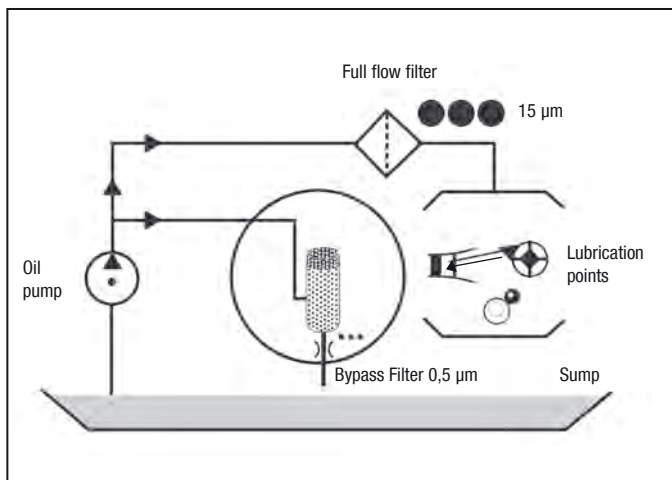

The benefits are many, and can be broken into three categories :

Technical benefits

- Less malfunctioning
- Greater reliability of operation
- Prolonged oil usage life
- Reduced down time
- Reduced wear on cylinder linings and pistons
- Less bore polishing
- Less formation of black sludge
- Improved engine compression
- Increased equipment life time

Environmental benefits

- Less oil consumption
- Therefore less waste oil
- Increased life time of additives
- Reduction of harmful emissions

Technical Data

Construction

- BPLS: Bypass Lube-Oil Filter

Materials

- Filter housing: Aluminium
- Sealings: NBR (Buna-N®)
FPM (Viton®)

Port Connection

- Inlet: G1/4
- Outlet: G1/4

Maximum Sump Size

- 35 l / 9.25 gal

Housing Volume

- 2,2 liter / .58 gal

Burst Pressure Housing

- > 20 bar / >290 PSI

Filter Element


- 0,5 micron cellulose element
- Glass fibre elements (pleated)
- Water absorbing elements

Financial benefits

- Savings in labour and materials (oil changes)
- Reduced costs for repairs and downtime
- Reduced waste processing costs

Applications

- Construction equipment
- Agricultural equipment
- Forestry equipment
- Diesel driven welding machines/generators
- Port equipment

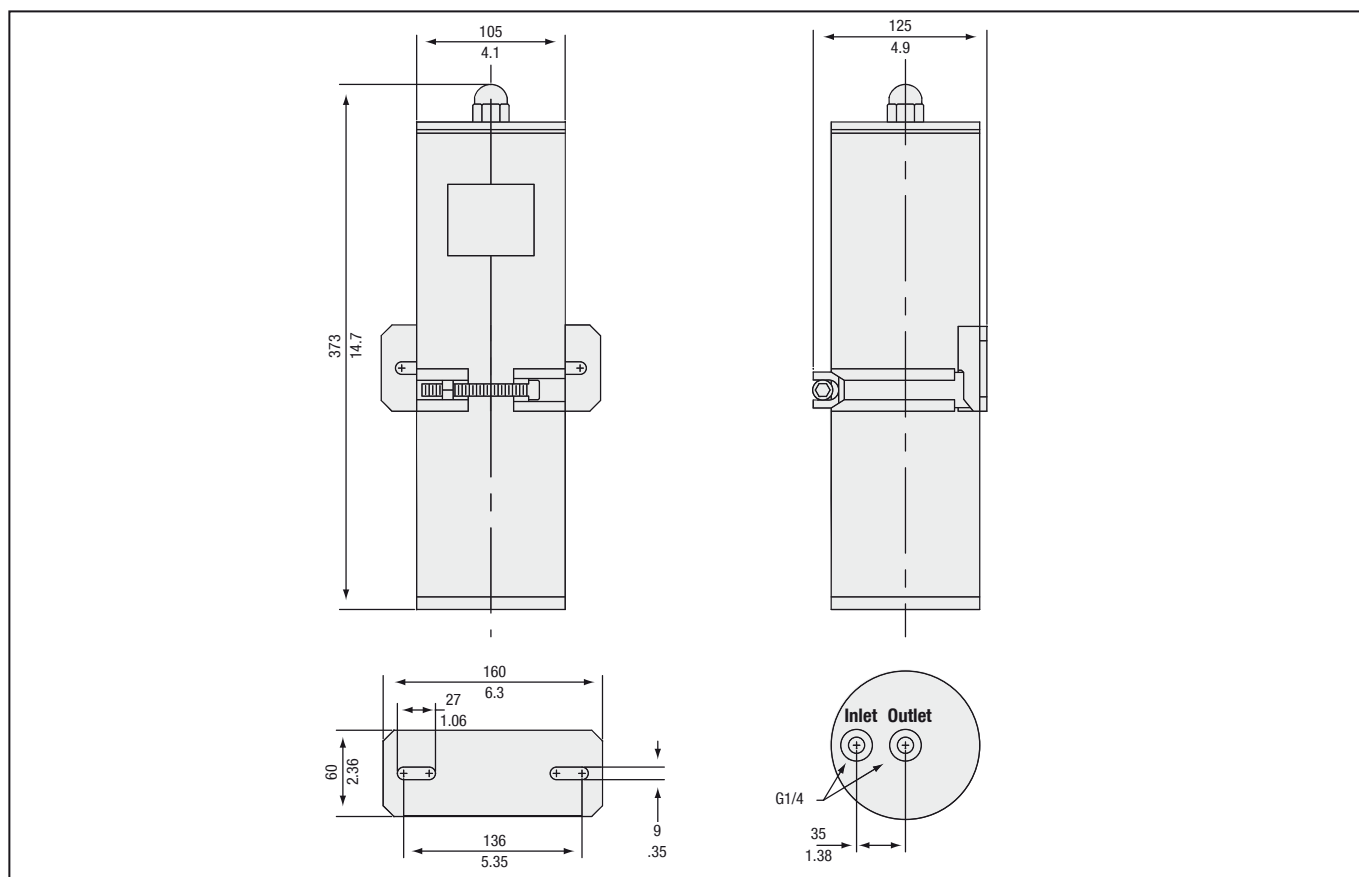Bypass Lube Oil Filter ■ Type BPLS
BPLS-Filter Dimensions


All dimensions in mm / in

Bypass Lube Oil Filter Housings / Complete Filters ■ Type BPLS
BPLS - 1A - 26 - H - B - 0 - 0 - 0

1 2 3 4 5 6 7 8

1 Type

Bypass Lube-Oil Filter **BPLS**
(for engines and transmission systems)

2 Housing Configuration

Length	Quantity of elements	Code
Single housing	1 pcs element - (281 mm)	1A

3 Filter Element Length

281 mm / 11.06 in **26**
4 Filter Material and Micron Rating

Material	Micron Rating µm	Code
Cellulose (standard)	0,5	H
Inorg. glass fibre	1	E01
Inorg. glass fibre	3	E03
Inorg. glass fibre	5	E05
Inorg. glass fibre	10	E10
Inorg. glass fibre	20	E20
Inorg. glass fibre and polymer (water absorption)	5	WA

5 Sealing Material

NBR (Buna-N®) (standard) **B**
FPM (Viton®) **V**
6 Housing Material

Aluminium (standard) **0**
7 Options

No options **0**
8 Bracket Options

No mounting bracket **0**
Standard mounting bracket (bulkhead) **1**
Filter Elements ■ Type SRM
SRM - 26 - H - B - 1

1 2 3 4 5

1 Type

Filter Element Series **SRM**
2 Filter Element Length

281 mm / 11.06 in **26**
3 Filter Material and Micron Rating


Material	Micron rating µm	Code
Cellulose (standard)	0,5	H
Inorg. glass fibre	1	E01
Inorg. glass fibre	3	E03
Inorg. glass fibre	5	E05
Inorg. glass fibre	10	E10
Inorg. glass fibre	20	E20
Inorg. glass fibre and polymer (water absorption)	5	WA

4 Sealing Material

NBR (Buna-N®) (standard) **B**
FPM (Viton®) **V**
5 Quantity

One piece filter element **1**
Box with 12 pieces filter element **12**

Mini Water Vac ▪ Type SMWV

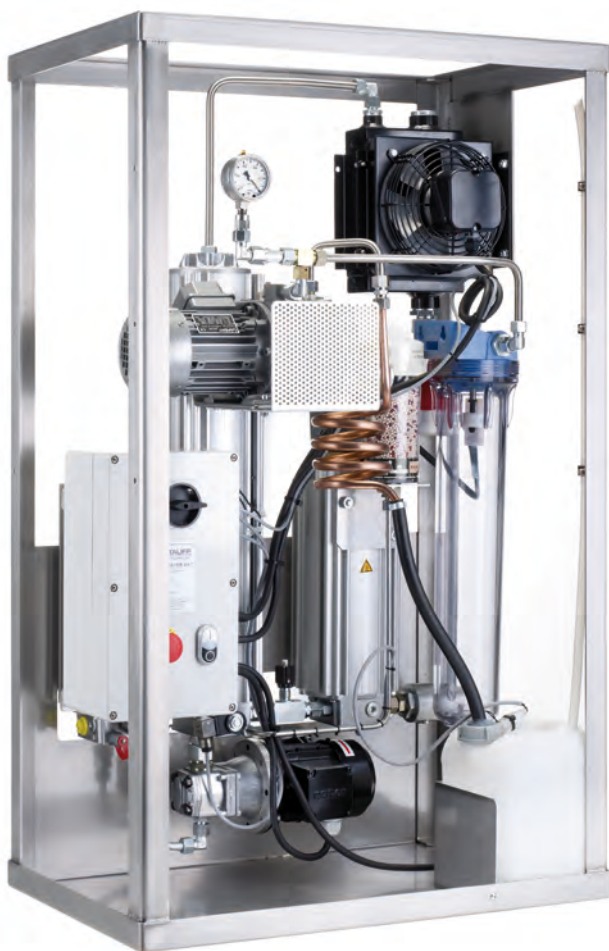

Product Description

The Mini Water Vac is a designated oil purification unit which can be applied directly to various types of machine reservoirs. It dehydrates and cleans most types of oils such as lubricating, hydraulic, transformer, and switch oils. The Mini Water Vac is a self-regulating filtration unit which removes particles, gas, and water. The purified oil satisfies the most stringent quality requirements.

The Mini Water Vac neither removes or alters oil additives. The water removal process is based on pure vacuum evaporation inside a vacuum chamber at a maximum temperature of +65 °C / +149 °F. Solid particle removal is achieved through a well proven STAUFF Systems Micro Filter.

Simple Operation

The Mini Water Vac does not require continuous supervision while operating. Once the unit is connected and commissioned, oil purification is a semi-automatic process. Desired oil temperature can be selected via the integrated heater thermostat. The dehydration and filtering process is fully automatic and is controlled via the PLC. The only manual action required is the emptying the pre-condenser bowl and the waste water container which are equipped with float switches to prevent overflow.

Water, Gas and Particle Removal

The Mini Water Vac removes liquid, gas, and solid particle contamination, which are corrosive and contribute to the reduction of machine life. Contamination greatly increases maintenance costs and contribute to breakdowns and total machine failures. The Mini Water Vac offers protection against malfunctions, breakdowns or total failures. The Mini Water Vac also protects the environment by reducing oil consumption and oil disposal.

Benefits

- Efficient water, gas and particle removal
- Extension of fluid life
- Reduces fluid disposal
- Minimizes corrosion
- Reduced failures and downtime
- Reduce operating costs

Technical Data

Construction

- SMWV-1A-30: Mini Water Vac Vacuum Dehydration Unit one filter housing

Materials

- Filter housing Eloxated Aluminium
- Vacuum chamber Eloxated Aluminium
- Heater chamber Eloxated Aluminium

Port Connection

- Inlet G1
- Outlet G1/2
- Online particle counter STAUFF Test (M16x2)

Max. System Volume

- 3000 l / 795 gal

Recirculating Flow Rate

- 90 l/h / 23.8 gal/hr

Max. Backpressure

- 1 bar / 14.5 PSI

Max. Heater Temperature

- +65 °C / +149 °F

Filter Element

- 1 micron inorganic glass fibre element $\beta_1 > 200$

Media Compatibility

- Viscosity between 20 ... 500 cSt
- Max. attainable water content 100 ppm

Removals

- 100% of free water, >80% of dissolved water
- 100% of free gases, >80% of dissolved gases

Dimensions

- 1200 x 740 x 450 mm / 47.3 x 29.1 x 17.7 in

Weight


- 130 kg / 287 lbs

Electrical Data

- Voltage 230/400 V AC, 50 Hz
255/460 V AC, 50 Hz
- Power supply 3 phases
- Heater section 2 kW
- Vacuum section 0,037 kW vacuum pump
- Max. current 3 Amps

Process Control

- PLC unit

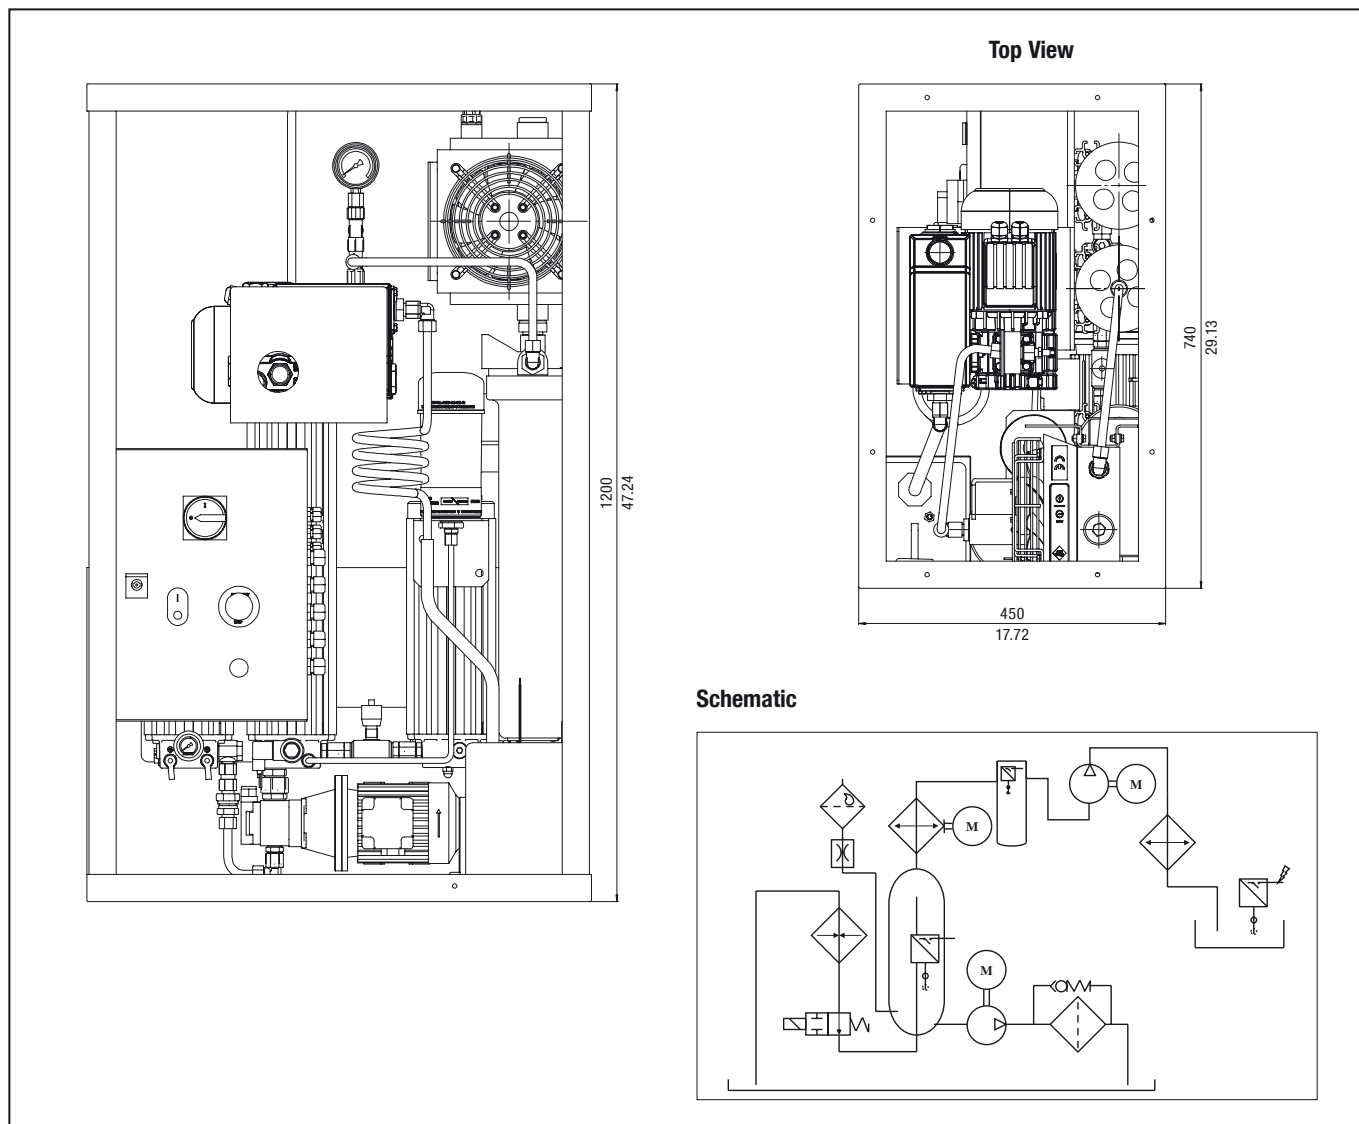Mini Water Vac ■ Type SMWV
Dimensions SMWV-1A

Mini Water Vac ■ Type SMWV

All dimensions in mm / in

SMWV - 1A - 30 - H - B - 0 - 60 - 0 - 0 - 0

1 2 3 4 5 6 7 8 9 10

1 Type

Mini Water Vac Oil Purifier (for industrial applications) **SMWV**
2 Housing Configuration

Length	Suitable for Reservoir Size	Quantity of Elements	Code
Single housing	3000 l / 795 gal	1 pcs	1A
Single length			

3 Filter Element Length

300 mm / 11.81 in **30**
4 Filter Material and Micron Rating

Material	Micron Rating µm	Code
Cellulose (standard)	0,5	H
Inorg. glass fibre	1	E01
Inorg. glass fibre	3	E03
Inorg. glass fibre	5	E05
Inorg. glass fibre	10	E10
Inorg. glass fibre	20	E20
Inorg. glass fibre and polymer (water absorption)	5	WA

5 Sealing Material

NBR (Buna-N®) (standard)	B
FPM (Viton®)	V

6 E-motor Options

Type	Code
230/400 V AC, 50 Hz, three phases, 1360 r/min	0
255/460 V AC, 60 Hz, three phases, 1630 r/min	

7 Pump Options

1 cc / rev **60**
8 Heating Element

2000 Watt (standard) **0**
9 Extra Functions

Without **0**
With water sensor **1**
10 Options

None **0**

Filter Elements ■ Type SRM



Product Description

STAUFF Systems distinguish themselves by their high efficiency filter elements which are capable of filtering silt particles down to 0,5 microns.

Two types of STAUFF Systems are available. The OLS Series uses an integral motor/pump combination to draw the hydraulic or lubrication fluid from the reservoir, filters it, and returns it to the reservoir. The other type of STAUFF System is the BPS Series which uses system pressure to draw a small oil flow from the system which is then filtered and returned to the reservoir.

The success of the STAUFF Offline Filtration System is due to the design of the element and housing. The element is constructed of 0,5 micron cellulose media applied with a special wrapping method, providing several hundred layers of filter media. The cellulose fibres also absorb and retain water, which slows down the oxidation process of the fluid. The construction of the housing allows only radial flow through the filter element. This design feature prevents channel forming and subsequent shortcircuiting of the media. The Offline design maintains a constant flow and pressure through the filter, which does not allow any particle unloading. These design characteristics enable the STAUFF Filtration System to maintain a rated filtration efficiency of $\beta_2 > 2330$. This allows the user to maintain fluid cleanliness levels which cannot be reached with conventional full flow filtration methods.

The unique STAUFF Filter

The principle of the STAUFF System is based on the unique original filter elements. With a filter fineness of 0,5 micron they have the capacity to remove even the smallest of dirt particles from the oil.

The micro filter works as a fine filter through which oil passes radially, from the outside to the inside. The filter elements are made entirely of cellulose and are specially designed for hydraulic and lubrication systems.

The use of cellulose as the filtration material has the added benefit that water can be absorbed. Water in oil creates a chemical reaction, which seriously deteriorates the oil.

Original Elements

The use of original STAUFF Systems filter elements will result in extreme fluid cleanliness and low water contamination levels in the fluid.

Through a carefully monitored quality control process excellent pressure drop curves, filter efficiency and dirt-hold capacity are ensured.

Cellulose Elements

The STAUFF Systems cellulose filter elements are unique in their design. They consist of several hundred layers of long fiber cellulose which are wound on a perforated center tube. The micro filter element works as a fine filter through which oil passes radially, from the outside to the inside, trapping solid particles throughout all the layers of cellulose. The long fiber cellulose is also capable of absorbing water, adding the benefit of moisture removal from the oil. STAUFF Systems cellulose elements are extremely efficient and have a large dirt-hold capacity.

The cellulose elements are produced in various sizes to suit all STAUFF Systems filter housings. The STAUFF Systems cellulose elements compatible with most commonly used hydraulic and lubricating fluids, including biodegradable fluids.

Glass fibre Elements

STAUFF Systems offers a range of glass fibre filter elements in a fineness of 1, 3, 5, 10 or 20 micron. The micro filter element works as a fine filter through which oil passes radially, from the outside to the inside. STAUFF Systems glass fibre filter elements (conventional pleated construction) are extremely efficient and have a large dirt-hold capacity.

The glass fiber elements are suited for all STAUFF Systems filter housing (except the size 20 housing) and are compatible with most commonly used hydraulic and lubricating fluids, including biodegradable fluids. The glass fibre elements are particularly suited for gearbox applications where high viscosity fluids limit the use of the cellulose elements.

Water Sorb Filter Inserts

STAUFF Systems offers a specifically designed water sorb combination filter element: water absorbing and particle retention. This pleated filter element with a fineness of 5 micron has layers of polymers in between layers of glass fibre, creating a unique media to remove both water and solid particles from the fluid.

Characteristics

- Continuous quality with stable flow/ Δp performance
- Extremely fine filters (0.5 micron)
- Large filtration surface
- High water absorption capacity
- Additives are not removed
- Large dirt collection capacity
- Extends oil usage life
- Extends life cycle main stream filters

Applications

The original filter elements are used in combination with STAUFF Systems filter housings in an endless range of industries.

Some Examples are:

- Plastic industry
- Steel industry
- Concrete and cement industry
- Petrochemical industry
- Maritime industry
- Paper industry
- Forestry industry


Offline and Bypass Filters Replacement Elements ■ Type SRM

Filter Element Technical Data


Element Model	SRM-30HB	SRM-30E01B	SRM-30E03B	SRM-30WAB
Filter Material	Cellulose	Glass fibre	Glass fibre	Glass fibre and Polymer
Filtration Efficiency	$\beta_{0.5} \geq 200$ / $\beta_{2} \geq 2331$	$\beta_1 \geq 200$	$\beta_3 \geq 200$	$\beta_{0.5} \geq 200$
Water Absorption Capacity	150 ml 5 oz	N/A	N/A	350 ml 11.8 oz
Nominal Flow per Element	2,1 l/min .6 GPM	2,1 l/min .6 GPM	2,1 l/min .6 GPM	2,1 l/min .6 GPM
Max. Viscosity at Nominal Flow Rate	180 cSt	800 cSt		
Max. Oil Temperature	+80 °C +176 °F			
Length of Element	300 mm 11.8 in			
Sealing Material (Standard)	NBR (Buna-N®) and Silicone Rubber	NBR (Buna-N®)	NBR (Buna-N®)	NBR (Buna-N®)
Other Sealing Material	Consult STAUFF			
Fluid Compatibility:				
--Mineral Oils H, HI, HLP, HVLP	OK	OK	OK	OK
-- Biodegradable Oils HEPG Polyethyleneglycol HEES Synthetic ester HETG Vegetable seed oil	Consult STAUFF OK Consult STAUFF	OK	OK	OK
-- Fire Inhibiting Fluids HFA emulsions HFC glycol/water solution HFD fluids no water content	NO NO Consult STAUFF	OK OK	OK	NO NO
Approximate Weight	0,8 kg 1.8 lb	1,25 kg 2.8 lb	1,25 kg 2.8 lb	1,25 kg 2.8 lb

Filter Element SRM-30HB Δp / viscosity - graph


(at a flow of 2,1 l/min / .6 US GPM per element)

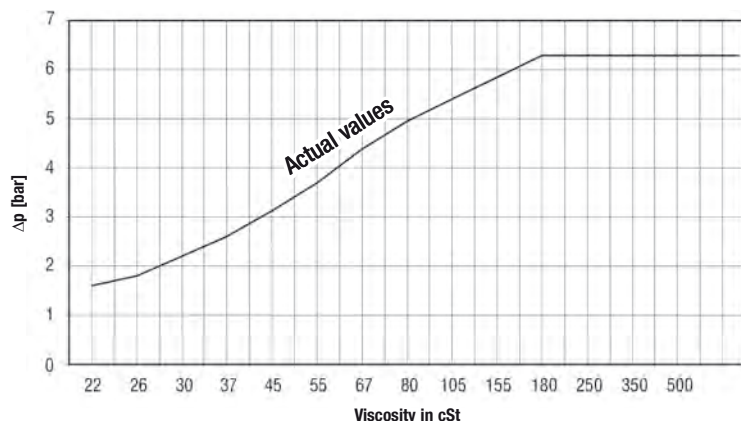


Filter Element SRM-30E03B Δp / Viscosity-Graph

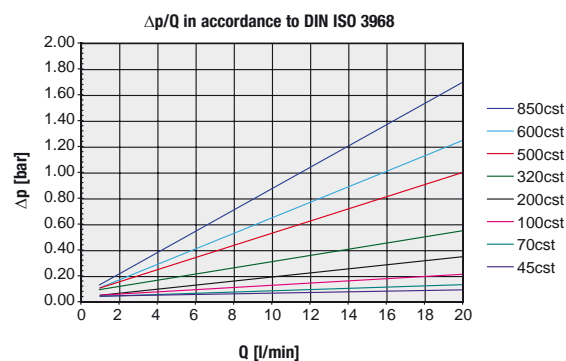

Filter Element SRM-30E01B Δp / Viscosity-Graph

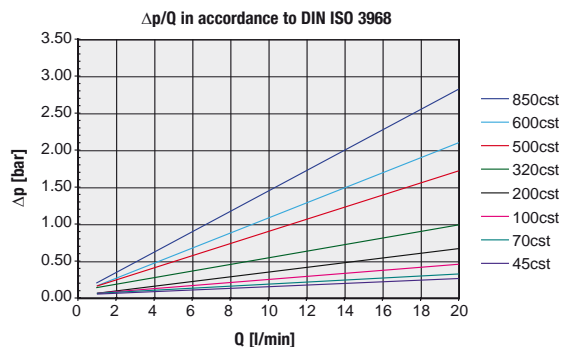

Filter Element SRM-30WAB Δp / Viscosity-Graph

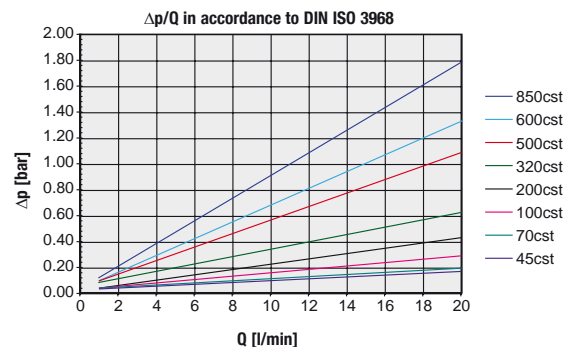

STAUFF Mobile Filter Systems



Product Description

Mobile Filter Systems from STAUFF already covered a wide spectrum of use: On the one hand compact and versatile, on the other hand designed for long-lasting use and highest nominal flow rates, they support the preventive maintenance of hydraulic and lubrication systems, thus providing extended maintenance intervals and helping to reduce operating costs within shortest payback periods. To cover region specific requirements STAUFF has a large range of different Mobile Filter Systems.

STAUFF Europe: STAUFF Mobile Filter System SMFS-P-015



- Mobile Filter System - hand-held unit
- High-quality gear pump
- Nominal flow rate up to 15 l/min / 4 US GPM
- 2 motor versions: 230 V 50 Hz or 400 V 50 Hz
- Micron rating available from 3 ... 125 µm
- Weight: approx. 23 kg / 51 lbs

STAUFF America: STAUFF Portable Filter Cart SCFC-05 / 10



- High-quality gear pump
- Nominal flow rate up to 38 l/min / 10 US GPM
- 3 motor versions: 110 V / 230 V / 400 V
- Micron rating available from 3 ... 144 µm
- Weight: approx. 53 kg / 117 lbs

STAUFF Europe: STAUFF Mobile Filter System SMFS-U-030



- Mobile Filter System - portable unit
- High-quality gear pump
- Nominal flow rate up to 30 l/min / 8 US GPM
- 2 motor versions: 230 V 50 Hz or 400 V 50 Hz
- Micron rating available from 3 ... 125 µm
- Weight: approx. 46 kg / 101 lbs

STAUFF America: STAUFF Portable Filter Cart SPFC-10



- High-quality gear pump
- Nominal flow rate up to 38 l/min / 10 US GPM
- 3 motor versions: 110 V / 230 V / 400 V
- Micron rating available from 3 ... 144 µm
- Weight: approx. 86 kg / 189 lbs

STAUFF Europe: STAUFF Mobile Filter System SMFS-U-060 / 110




- Mobile Filter System - portable unit
- High-quality gear pump
- Nominal flow rate up to 60 l/min / 15 US GPM or 110 l/min / 30 US GPM
- Micron rating available from 3 ... 25 µm
- Weight: approx. 87 kg / 192 lbs (SMFS-U-060)
approx. 130 kg / 287 lbs (SMFS-U-110)

STAUFF Australia: STAUFF Portable Filter Cart SPFC



- High-quality gear pump
- Nominal flow rate up to 23 l/min / 6 US GPM
- Magnetic core pre-filtration
- Micron rating 10 µm
- Weight: approx. 53 kg / 117 lbs

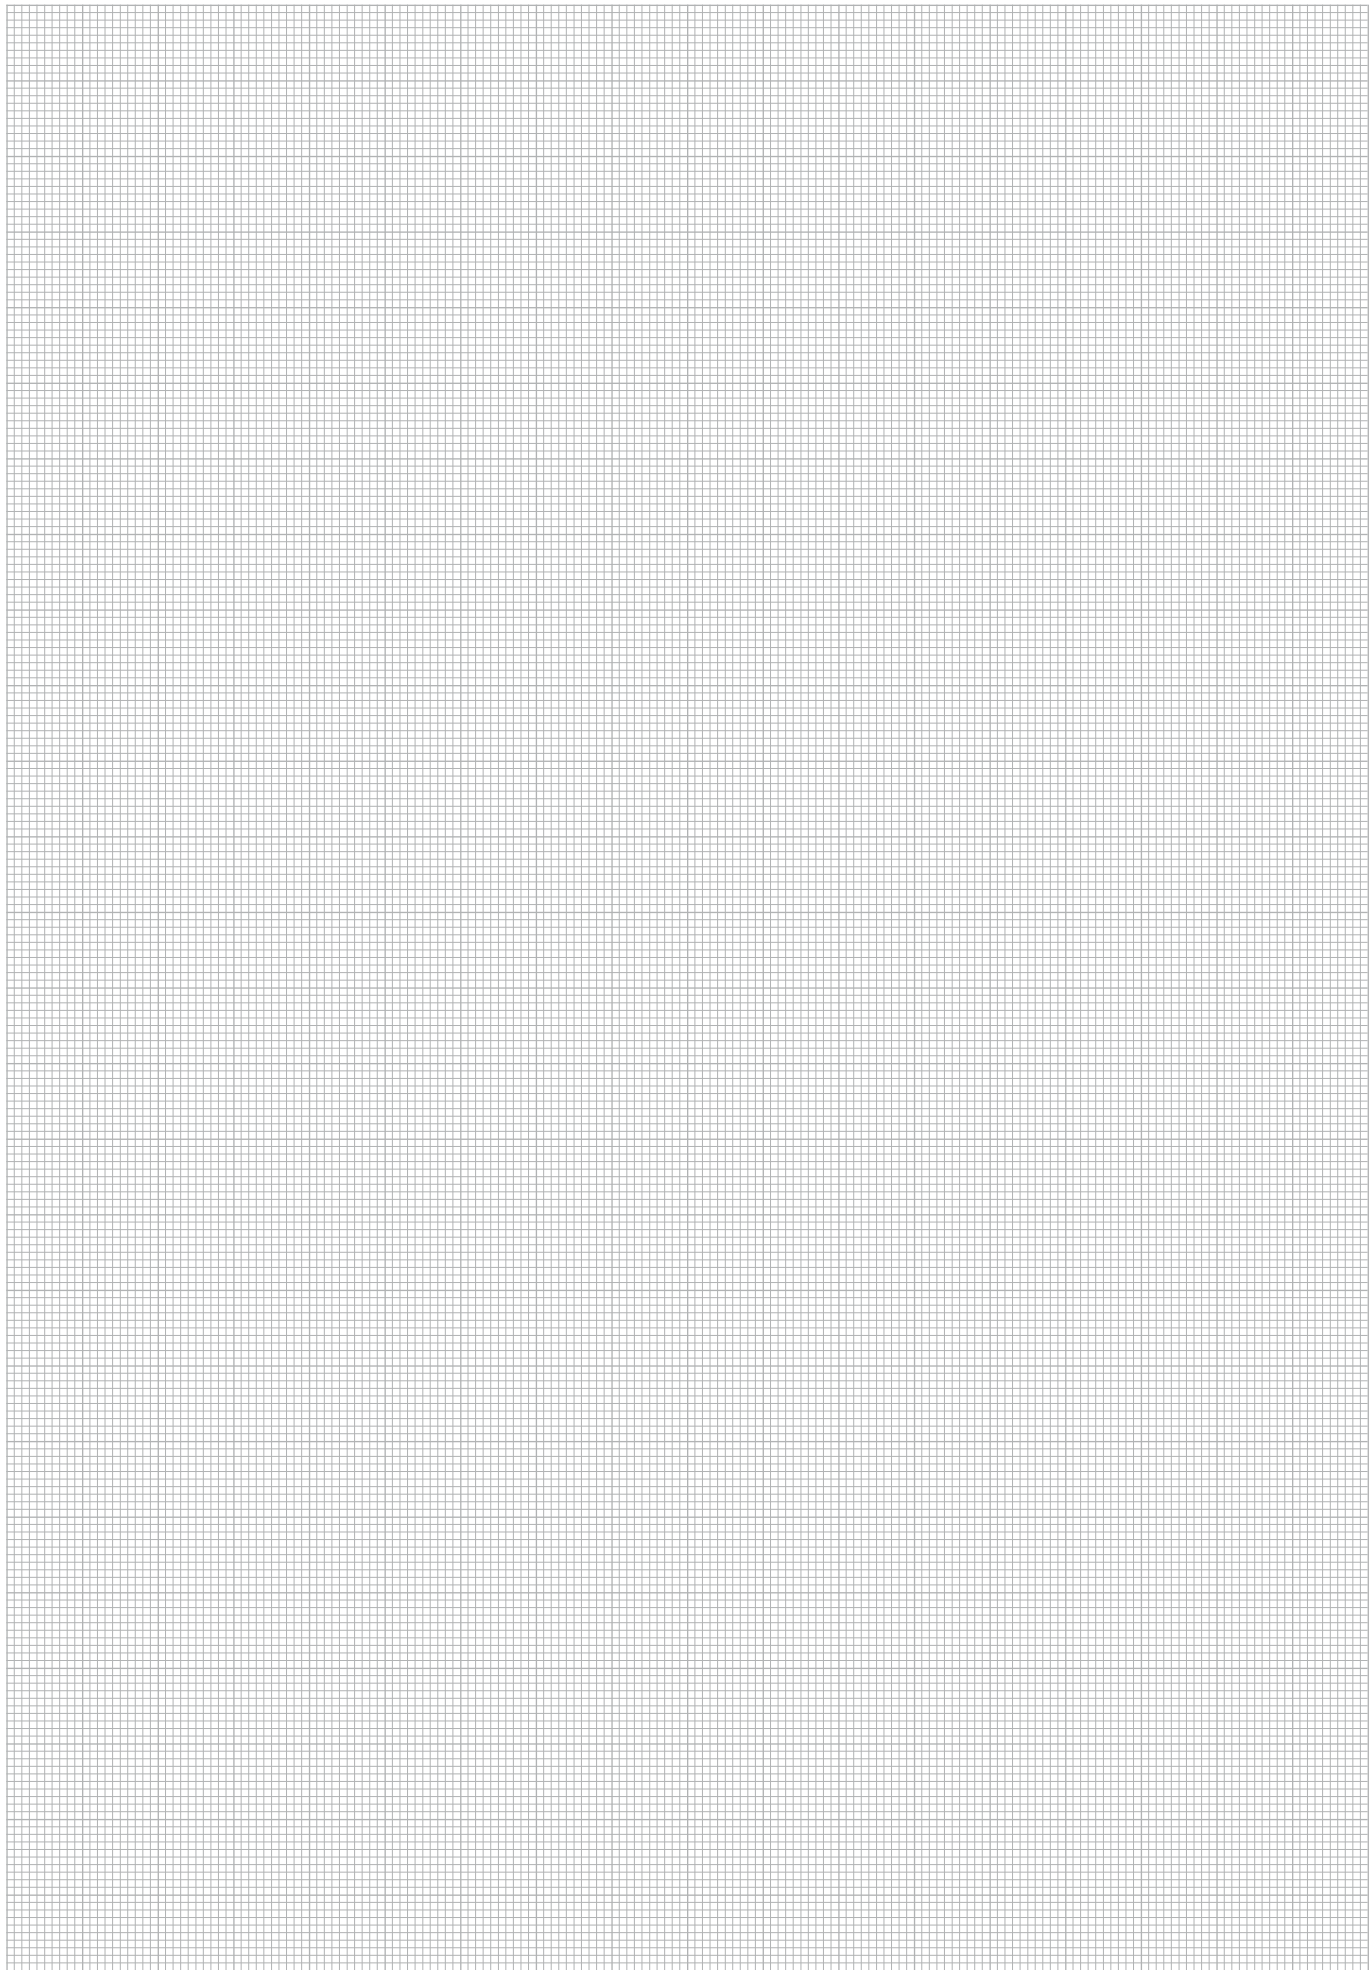

for Single, Double and Automatic Filters



Introduction

We are an internationally leading developer, manufacturer and supplier of pipework components, measuring equipment and hydraulic accessories.

In the field of Filtration Technology, we supply replacement filter elements for single, double and automatic filters which are qualified for various type of fluids such as lubricating oils, heavy fuels, water, chemicals and cooling lubricants.

- Chemical industry
- Oil and gas industry
- Power plant engineering and turbine technology
- Pulp and paper industry (Figure: Voith Paper GmbH & Co. KG)
- Shipyards, shipping companies (Figure: ThyssenKrupp Marine Systems AG)
- Steel and heavy-metal industry

Thanks to state-of-the-art manufacturing technologies and numerous approvals and certifications for several international organisations and institutes, we can ensure the highest technical standard and best quality. Our clients include leading international companies.

For more than ten years, we have been providing shipping companies as well as ship chandlers and traders with hydraulic filters and replacement filter elements for filter housings of other manufacturers.



Figure: Voith Papier GmbH & Co. KG



Figure: ThyssenKrupp Marine Systems AG



for Single, Double and Automatic Filters

Screw-In and Plug-In Elements

We produce high-quality Screw-In and Plug-In Elements in Stainless Steel design or in Plastic design. They fit into the most common single, double and automatic filters.

Design

- Stainless Steel
- Plastic – Stainless Steel

Filter media

- Stainless Steel, high quality made in Germany

End cap

- Stainless Steel / Plastic

Micron rating

- 10 ... 200 µm (alternative micron ratings on request)

Length

- 220 ... 750 mm

Application

- lubricating oils, heavy fuels, water, chemicals, cooling lubricants



Star-Pleated Elements, Basket and Ring Sieves

We deliver high-quality Star-Pleated Elements, Basket and Ring Sieves in Stainless Steel design with particularly pleated filter media which offer a very good filtrate quality and a long durability.

Design

- Stainless Steel

Filter media

- Stainless Steel, high quality made in Germany

Micron rating

- 10 ... 200 µm (alternative micron ratings on request)

Length

- according to housing, respectively adapted for every single, double and automatic filter

Application

- lubricating oils, heavy fuels, water, chemicals, cooling lubricants



Heavy Fuel Elements

STAUFF Heavy Fuel Elements separate particles from the fluid flow as the last filtration step before direct injection to the engine room / combustor.

Micron rating

- 6 µm or 10 µm (alternative micron ratings on request)

Length

- 439 mm (alternative lengths on request)

Diameter

- 49 mm (alternative diameters on request)

Because of the pleated design with support cloth, STAUFF Heavy Fuel Elements offer a large filter area associated with a long durability and an excellent separation rate.



for Single, Double and Automatic Filters



Paper, Fibreglass and Polyester Elements

Due to the pleated design of STAUFF Paper Elements, they can offer a large filter area in a small place and with a long durability. The cover made of Polyester allows a safe treatment during the installation and the demounting without damaging the filter media.

Design

- pleated elements

Micron rating

- 10 µm or 50 µm (alternative micron ratings on request)

Length:

- 254 mm, 500 mm, 750 mm (alternative lengths on request)

Application

- bypass and flushing filter for automatic filters and double filters in the field of lubricating oil



Plastic Elements

STAUFF Plastic Elements have a special cloth and a special format which ensure the safety and the optimal protection of the motors.

The molded end caps allow a quick installation and demounting as they can be easily connected.

Length:

- 320 mm (alternative lengths on request)

Design

- Plastic

Micron rating

on request

Application

- pre-filter of motors



Multimantle Elements

Multimantle Elements in different types and sizes complete the STAUFF exchange program.

In addition, we produce replacement elements according to models or drawings from existing and older series.

